



RSM-117-02-L-D



RSM-109-02-L-D



(1,27 mm) .050"

RSM SERIES

SMT MICRO SOCKET

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?RSM

Insulator Material:
Black Liquid Crystal Polymer
Contact Material:
Phosphor Bronze

Plating:
Au or Sn over
50µ" (1,27 µm) Ni
Current Rating (RSM/FTR):
3.1 A per pin
(1 pin powered per row)

Operating Temp Range:
-55°C to +125°C

Contact Resistance:
10 mΩ

Lead Size Accepted:
(0,46 mm) .018" SQ

Insertion Depth:
Top Entry = (2,64 mm) .104"
to (5,84 mm) .230" with
(0,38 mm) .015" wipe, or
pass-through.

Bottom Entry = (5,49 mm)
.216" minimum
(Add board thickness for
correct post OAL)

Insertion Force:
(Single contact only)
3.5 oz (0,97 N) avg.

Withdrawal Force:
(Single contact only)
1.5 oz (0,42 N) avg.


RoHS Compliant:
Yes

Processing:
Lead-Free Solderable:
Yes

SMT Lead Coplanarity:
(0,10 mm) .004" max

Mates with:
FTR, HTMS, HDWM,
DWM, TML, ZML, TMS


OPTIONS



ALSO AVAILABLE (MOQ Required)


- Other platings
- Locking clips
- Contact Samtec.

Optional
Pick & Place
Pad

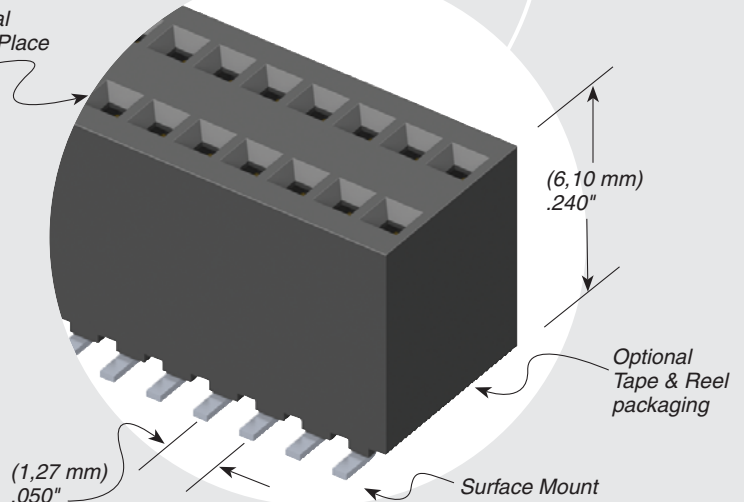

Optional
Tape & Reel
packaging

Surface Mount

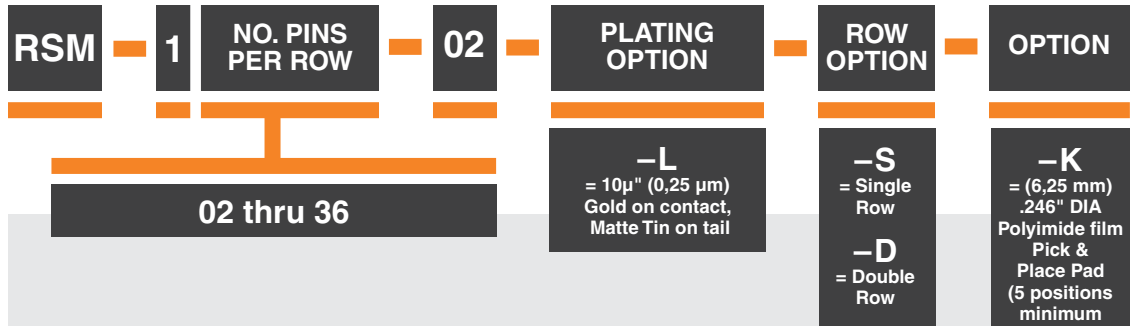

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality







FILE NO. E111594 FILE NO. 090871_0_000


TAPE & REEL AVAILABILITY

No tooling charges.
Minimum order is the lesser of a full reel quantity or 125 pieces.
Order any quantity above minimum.
In-house design, manufacture.
Quick turn-around.

Call Samtec for specifications and ordering information.

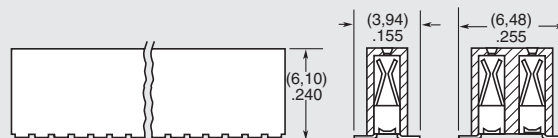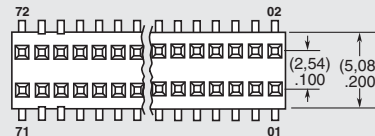

-S option
Pick & Place Pad



-D option
Pick & Place Pad

Note: Some sizes, styles and options are non-standard, non-returnable.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [000-34000](#) [0009482033](#) [0009507031](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [647662-1](#) [65039-019ELF](#) [65817-002LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67016-026LF](#) [67046-001LF](#) [67095-007LF](#) [67230-005LF](#)