



5SDD 92Z0401

Housingless Welding Diode

Properties

- High forward current capability
- Low forward and reverse recovery losses

Applications

- Welding equipment
- High current application up to 2000 Hz

Key Parameters

| | | | |
|------------|---|--------|----|
| V_{RRM} | = | 400 | V |
| I_{FAVm} | = | 9 244 | A |
| I_{FSM} | = | 60 000 | A |
| V_{TO} | = | 0.780 | V |
| r_T | = | 0.031 | mΩ |

Types

| | |
|---------------------|---|
| | V_{RRM} |
| 5SDD 92Z0401 | 400 V |
| Conditions: | $T_j = -40 \div 180 \text{ }^\circ\text{C}$, half sine waveform, $f = 50 \text{ Hz}$ |

Mechanical Data

| | | |
|-------|---------------------------|------------|
| F_m | Mounting force | 22 ÷ 50 kN |
| m | Weight | 0.10 kg |
| D_s | Surface creepage distance | 2 mm |
| D_a | Air strike distance | 2 mm |

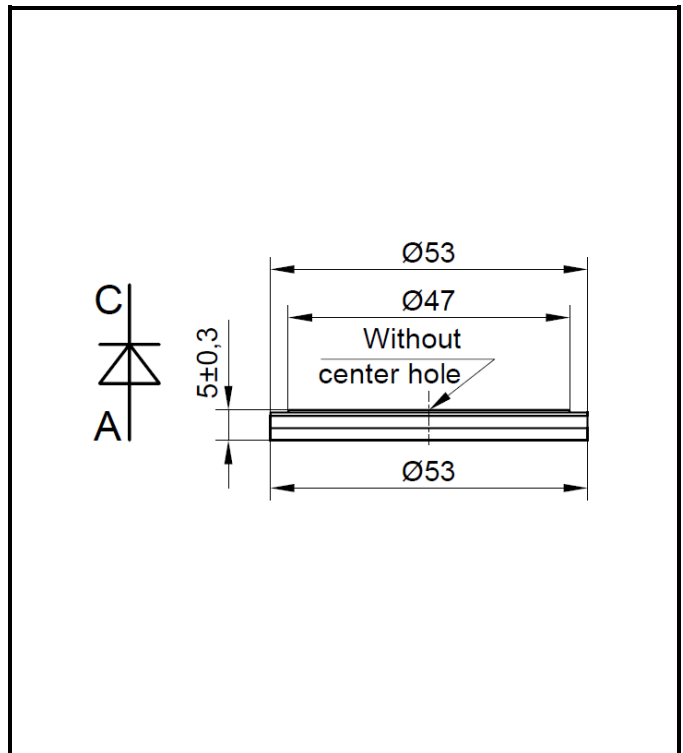


Fig. 1 Case



ABB s.r.o.

Novodvorska 1768/138a, 142 21 Praha 4, Czech Republic

tel.: +420 261 306 250, <http://www.abb.com/semiconductors>


| Maximum Ratings | | | Maximum Limits | Unit |
|---------------------------|---|------------------------------------|-----------------------------------|-----------------------|
| V_{RRM} | Repetitive peak reverse voltage $T_j = -40 \div 180 \text{ }^\circ\text{C}$ | | 400 | V |
| I_{FAVm} | Average forward current | $T_c = 85 \text{ }^\circ\text{C}$ | 9 244 | A |
| | | $T_c = 110 \text{ }^\circ\text{C}$ | 7 489 | |
| I_{FRMS} | RMS forward current | $T_c = 85 \text{ }^\circ\text{C}$ | 14 520 | A |
| | | $T_c = 110 \text{ }^\circ\text{C}$ | 11 763 | |
| I_{RRM} | Repetitive reverse current $V_R = V_{RRM}$ | | 50 | mA |
| I_{FSM} | Non repetitive peak surge current $V_R = 0 \text{ V}$, half sine pulse | $t_p = 8.3 \text{ ms}$ | 64 000 | A |
| | | $t_p = 10 \text{ ms}$ | 60 000 | |
| I^2t | Limiting load integral $V_R = 0 \text{ V}$, half sine pulse | $t_p = 8.3 \text{ ms}$ | 17 049 000 | A²s |
| | | $t_p = 10 \text{ ms}$ | 18 000 000 | |
| $T_{jmin} - T_{jmax}$ | Operating temperature range | | - 40 \div 180 | °C |
| $T_{stgmin} - T_{stgmax}$ | Storage temperature range | | - 40 \div 180 | |

Unless otherwise specified $T_j = 180 \text{ }^\circ\text{C}$

| Characteristics | | | Value | | | Unit |
|------------------------|---|-----------------------------|--------------|------------|--------------|-------------|
| | | | <i>min</i> | <i>typ</i> | <i>max</i> | |
| V_{T0} | Threshold voltage | | | | 0.780 | V |
| r_T | Forward slope resistance $I_{F1} = 7\,000 \text{ A}$, $I_{F2} = 21\,000 \text{ A}$ | | | | 0.031 | mΩ |
| V_{FM} | Maximum forward voltage | $I_{FM} = 5\,000 \text{ A}$ | | | 0.920 | V |
| | | $I_{FM} = 8\,000 \text{ A}$ | | | 1.030 | |
| Q_{rr} | Recovered charge $I_{FM} = 1\,000 \text{ A}$, $di/dt = -30 \text{ A}/\mu\text{s}$, $V_R = 50 \text{ V}$ | | | 400 | | μC |

Unless otherwise specified $T_j = 180 \text{ }^\circ\text{C}$

| Thermal Parameters | | | Value | Unit |
|--------------------|-------------------------------------|----------------------|-------|------|
| R_{thjc} | Thermal resistance junction to case | double side cooling | 5.6 | K/kW |
| | | anode side cooling | 7.4 | |
| | | cathode side cooling | 23.5 | |
| R_{thch} | Thermal resistance case to heatsink | double side cooling | 3.6 | K/kW |
| | | anode side cooling | 6.7 | |
| | | cathode side cooling | 8.0 | |

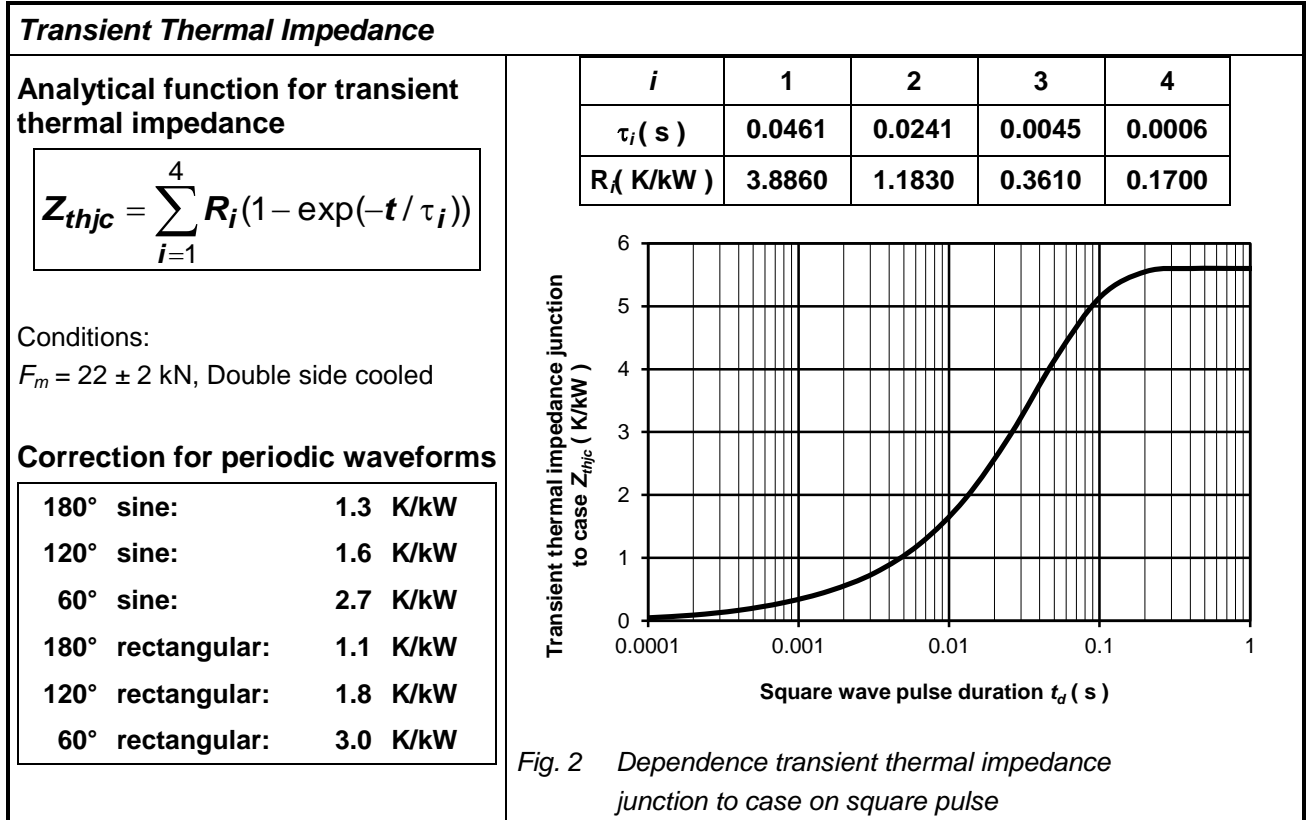

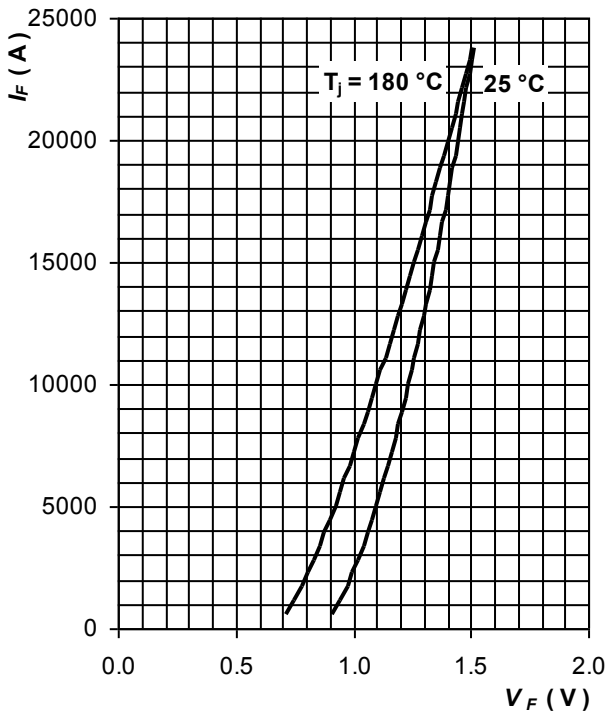


Fig. 3 Maximum forward voltage drop characteristics

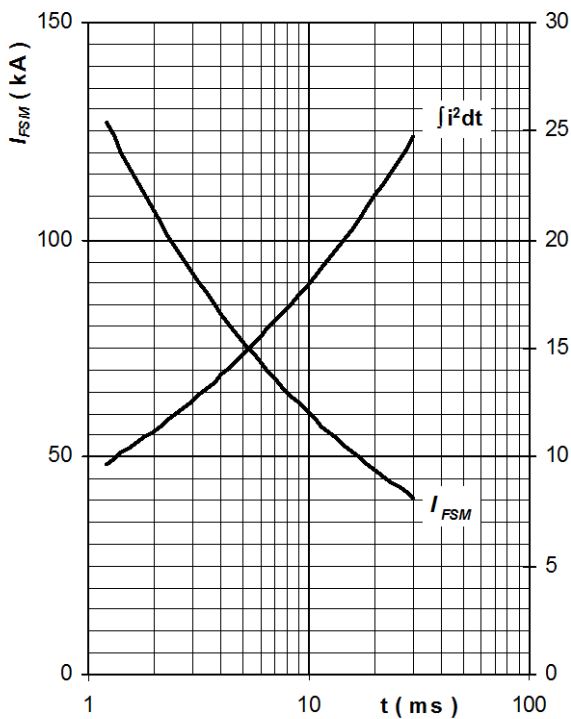


Fig. 4 Surge forward current vs. pulse length, half sine wave, single pulse, $V_R = 0\text{ V}$, $T_j = T_{jmax}$

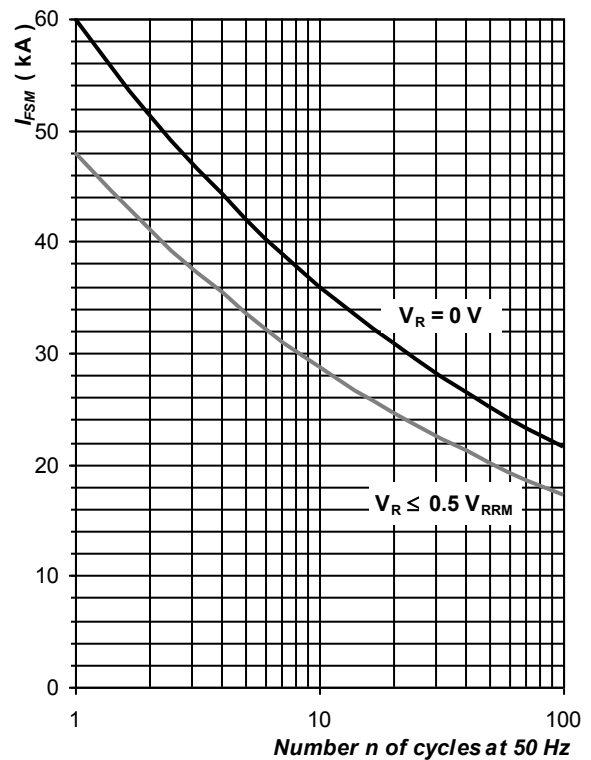


Fig. 5 Surge forward current vs. number of pulses, half sine wave, $T_j = T_{jmax}$

ABB s.r.o., Novodvorska 1768/138a, 142 21 Praha 4, Czech Republic

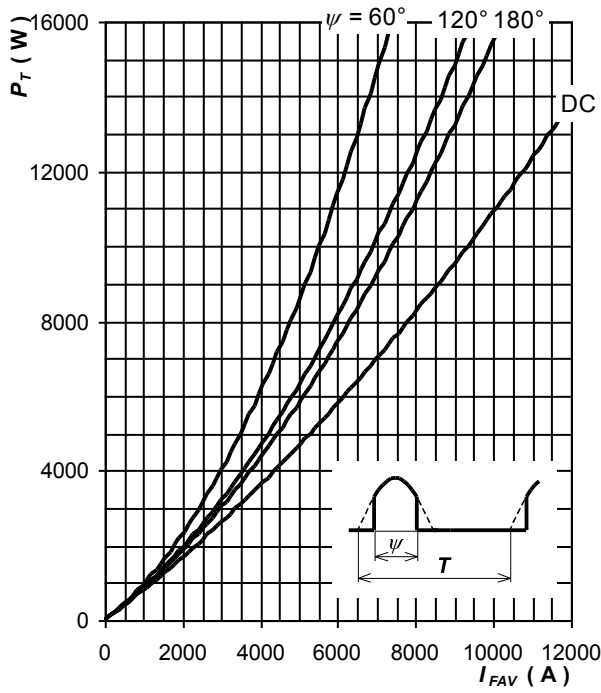


Fig. 6 Forward power loss vs. average forward current, sine waveform, $f = 50 \text{ Hz}$, $T = 1/f$

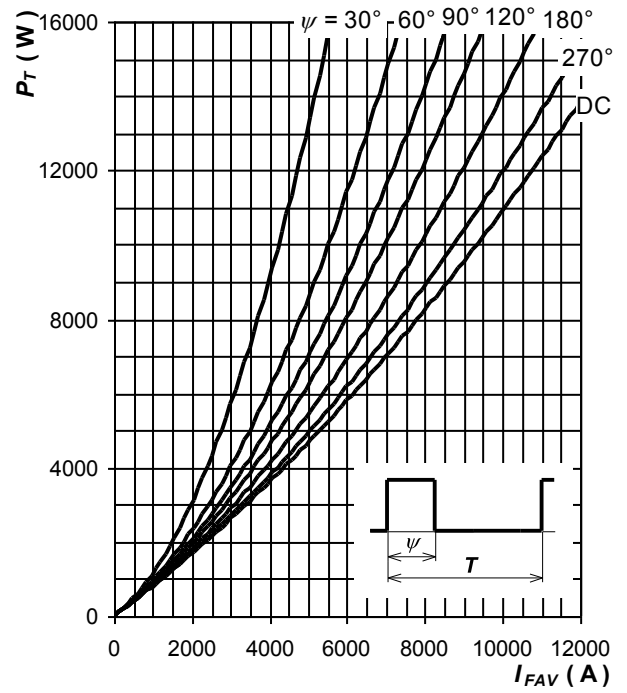


Fig. 7 Forward power loss vs. average forward current, square waveform, $f = 50 \text{ Hz}$, $T = 1/f$

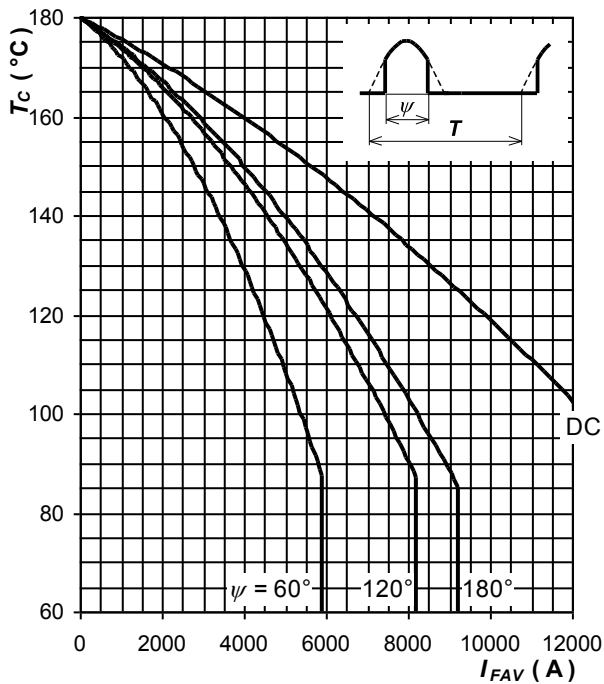


Fig. 8 Max. case temperature vs. aver. forward current, sine waveform, $f = 50 \text{ Hz}$, $T = 1/f$

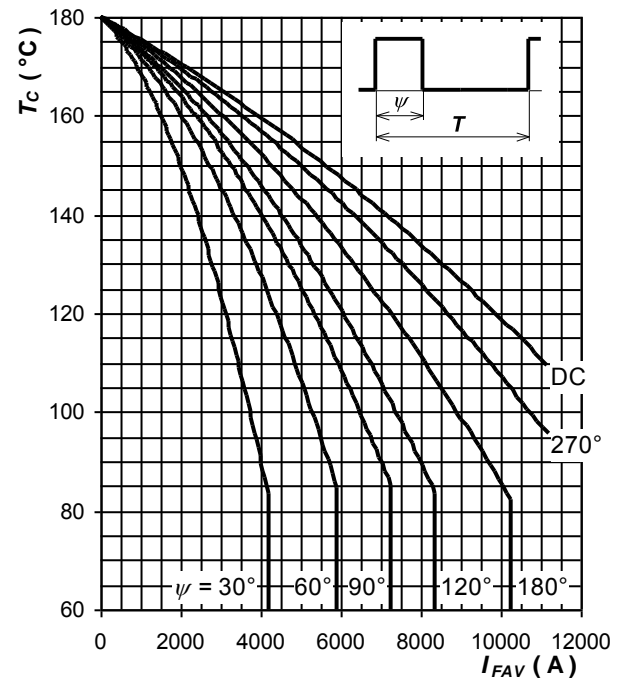


Fig. 9 Max. case temperature vs. aver. forward current, square waveform, $f = 50 \text{ Hz}$, $T = 1/f$

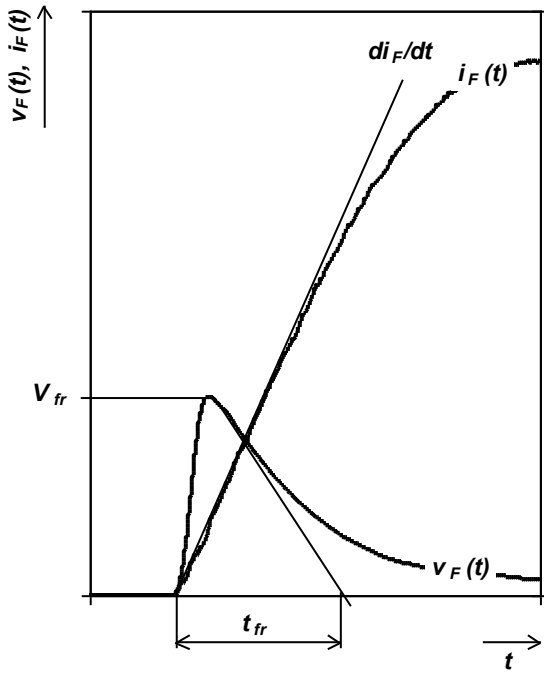


Fig. 10 Typical forward recovery voltage waveform when the diode is turned on with high di_F/dt

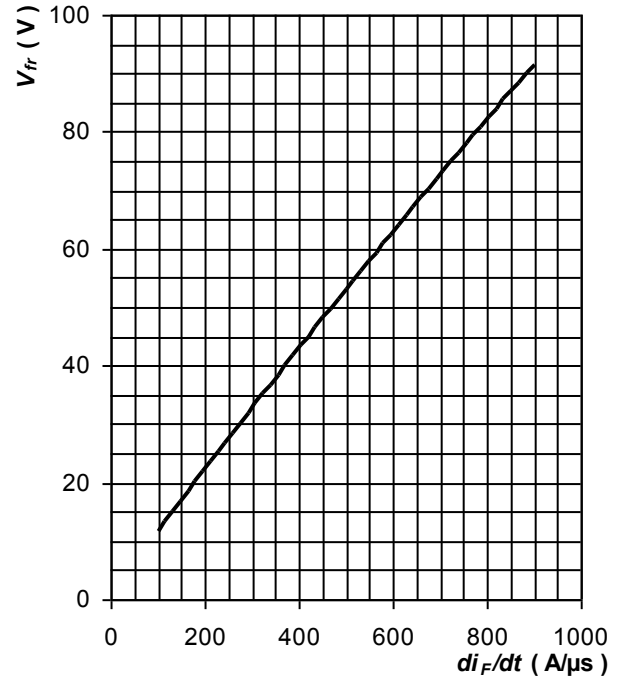


Fig. 11 Max. forward recovery voltage vs. rate of rise forward current, trapezoid pulse, $T_j = T_{jmax}$, $t_{fr} \leq 10 \mu s$

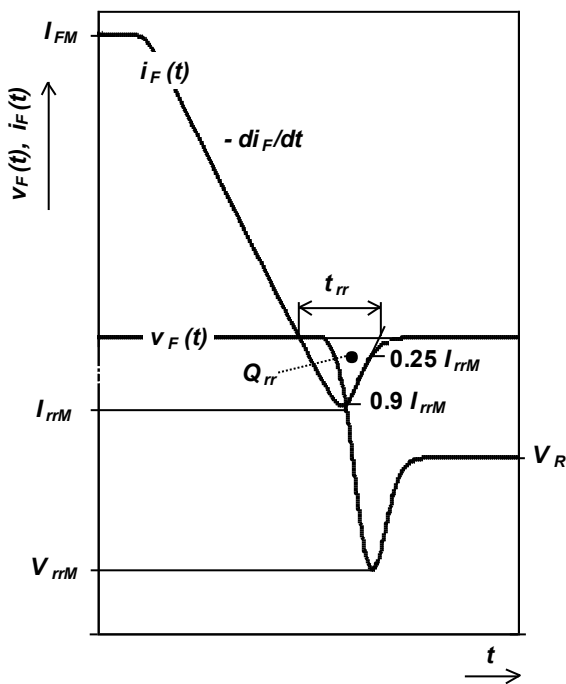


Fig. 12 Definition of reverse recovery parameters

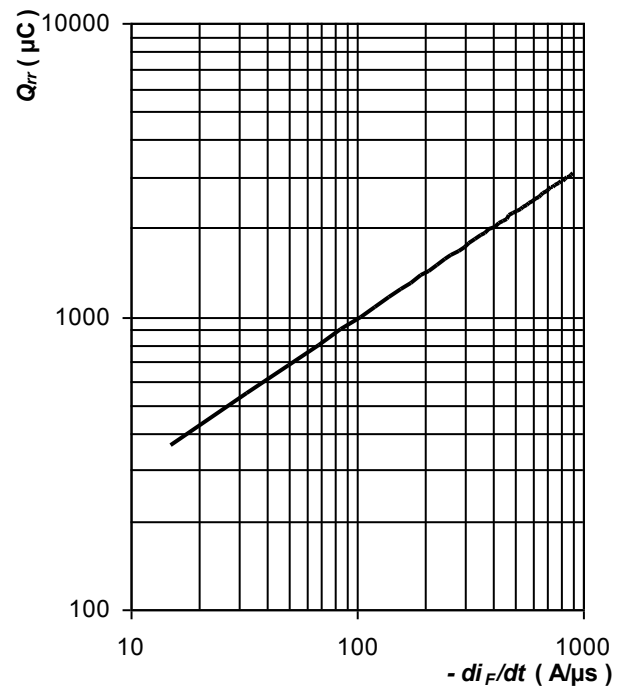


Fig. 13 Max. recovered charge vs. rate of fall forward current, trapezoid pulse, $I_{FM} = 2\ 000\ A$, $V_R = 100\ V$, $T_j = T_{jmax}$

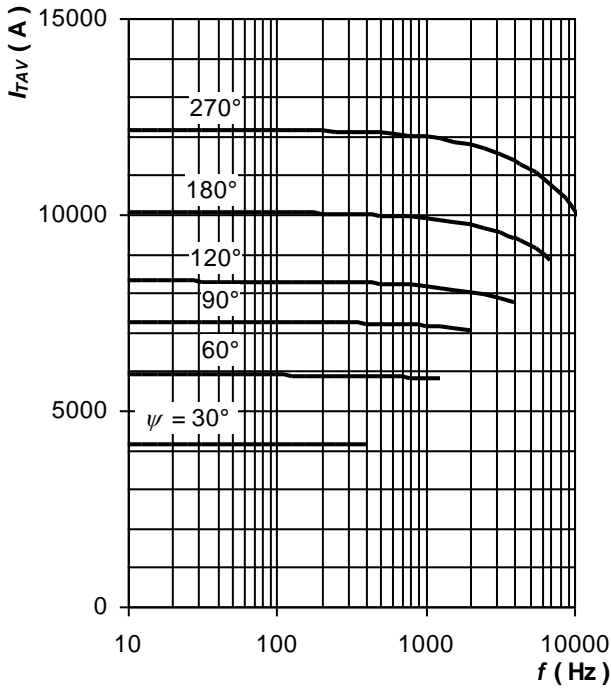


Fig. 14 Average forward current vs. frequency, trapezoid waveform, $T_C = 85\text{ }^\circ\text{C}$, $di_F/dt = \pm 500\text{ A}/\mu\text{s}$, $V_R = 50\text{ V}$

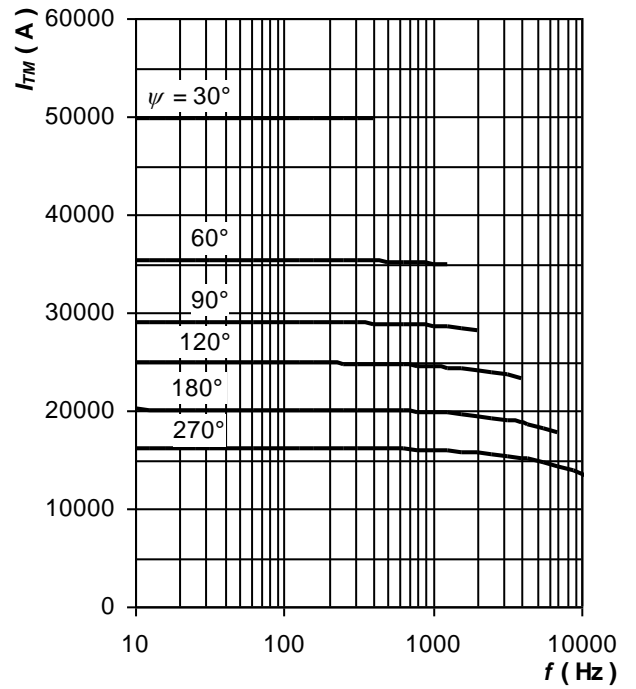


Fig. 15 Maximum forward current vs. frequency, trapezoid waveform, $T_C = 85\text{ }^\circ\text{C}$, $di_F/dt = \pm 500\text{ A}/\mu\text{s}$, $V_R = 50\text{ V}$

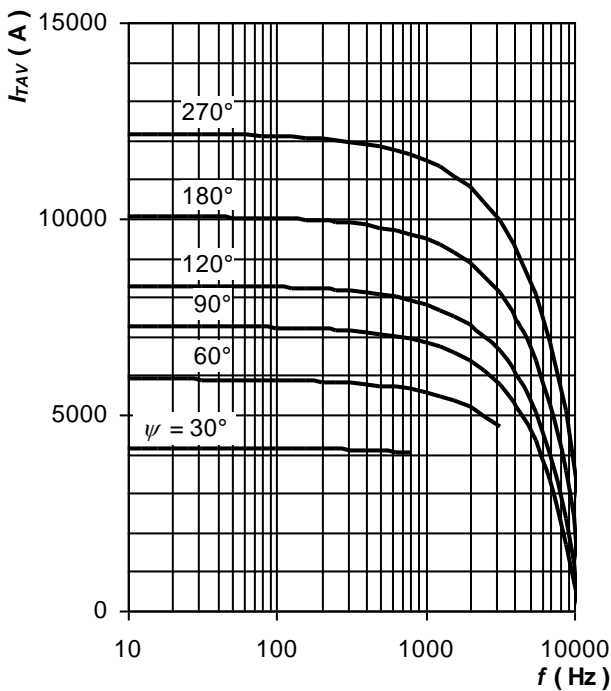


Fig. 16 Average forward current vs. frequency, trapezoid waveform, $T_C = 85\text{ }^\circ\text{C}$, $di_F/dt = \pm 1000\text{ A}/\mu\text{s}$, $V_R = 50\text{ V}$

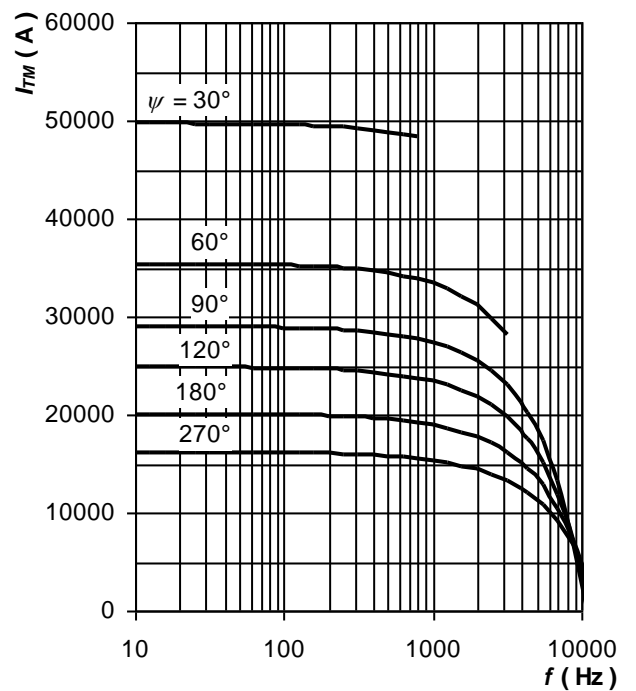


Fig. 17 Maximum forward current vs. frequency, trapezoid waveform, $T_C = 85\text{ }^\circ\text{C}$, $di_F/dt = \pm 1000\text{ A}/\mu\text{s}$, $V_R = 50\text{ V}$

ABB s.r.o., Novodvorska 1768/138a, 142 21 Praha 4, Czech Republic

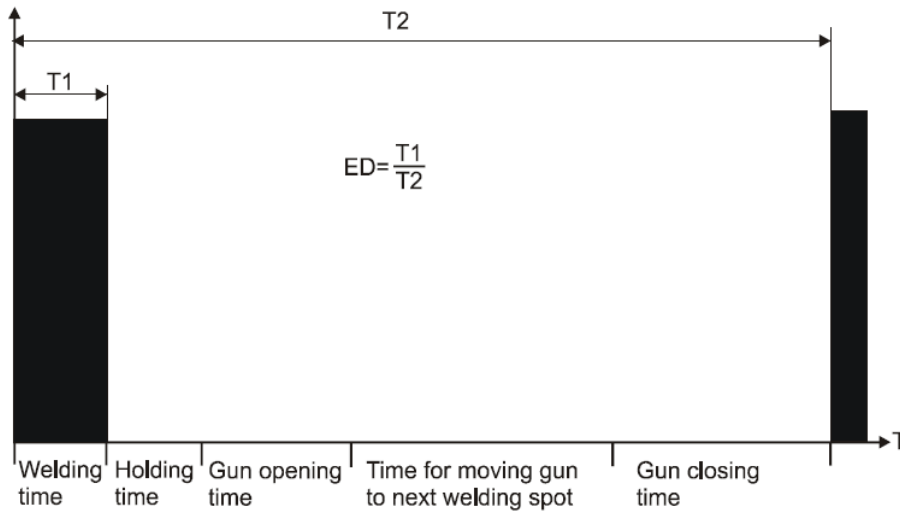


Fig. 18 Definition of ED for typical welding sequence

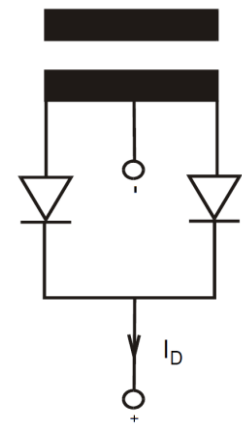


Fig. 19 Definition of I_D for single-phase centre tap

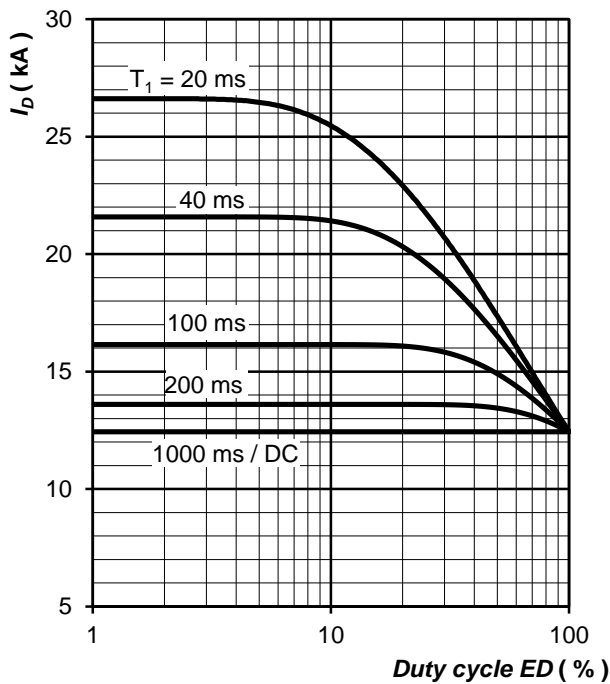


Fig. 20 Current load capacity, cont.,
DC output welding current with single-phase centre tap vs. duty cycle
 $f = 1000$ Hz, square wave, $\Delta T_j = 80$ °C

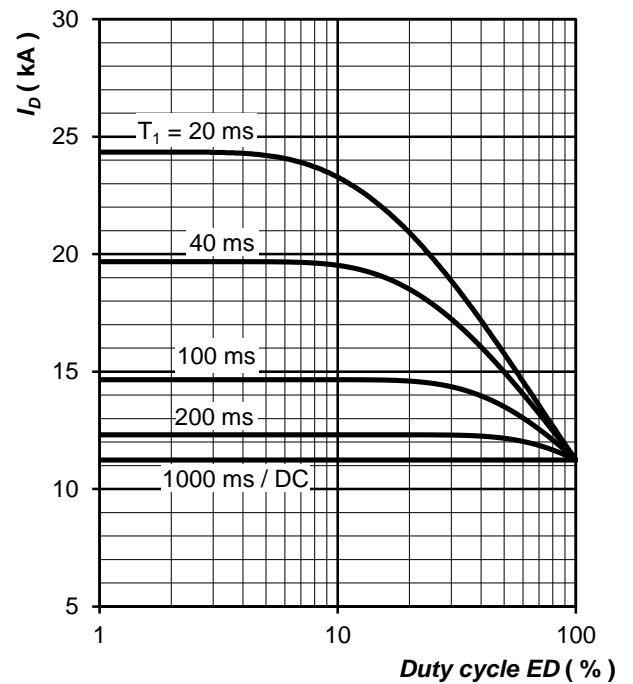


Fig. 21 Current load capacity, cont.,
DC output welding current with single-phase centre tap vs. duty cycle
 $f = 1000$ Hz, square wave, $\Delta T_j = 70$ °C

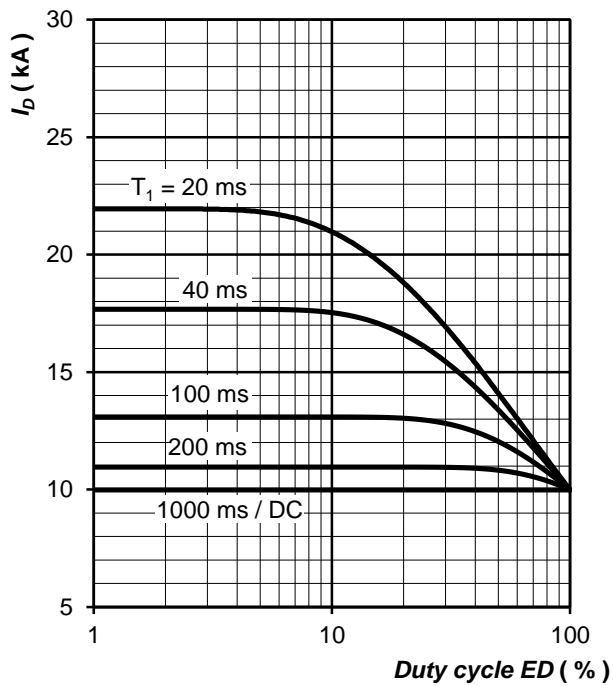


Fig. 22 Current load capacity, cont.,
DC output welding current with single-phase
centre tap vs. duty cycle
 $f = 1000 \text{ Hz}$, square wave, $\Delta T_j = 60 \text{ }^\circ\text{C}$

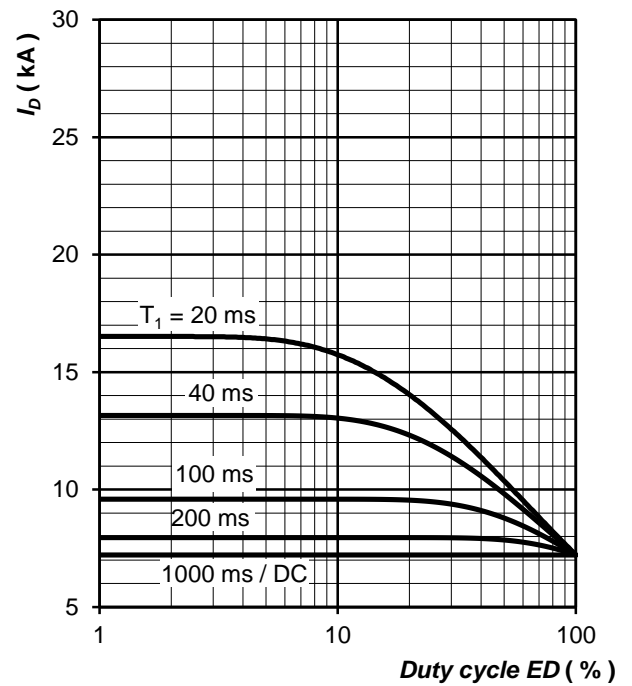


Fig. 23 Current load capacity, cont.,
DC output welding current with single-phase
centre tap vs. duty cycle
 $f = 1000 \text{ Hz}$, square wave, $\Delta T_j = 40 \text{ }^\circ\text{C}$

Notes:

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Diodes - General Purpose, Power, Switching category](#):

Click to view products by [ABB manufacturer](#):

Other Similar products are found below :

[MCL4151-TR3](#) [MMBD3004S-13-F](#) [RD0306T-H](#) [RGP30G-E373](#) [BAQ333-TR](#) [BAQ335-TR](#) [BAQ33-GS18](#) [BAS1602VH6327XT](#) [BAV17-TR](#) [BAV19-TR](#) [BAV301-TR](#) [BAW27-TAP](#) [NSVBAV23CLT1G](#) [NTE525](#) [1SS181-TP](#) [1SS184-TP](#) [1SS193,LF](#) [1SS193-TP](#) [1SS400CST2RA](#) [SBAV99LT3G](#) [SDAA13](#) [LL4448-GS18](#) [SHN2D02FUTW1T1G](#) [LS4150GS18](#) [LS4151GS08](#) [SMMBD7000LT3G](#) [1N4449](#) [1N4934-E3/73](#) [APT100DL60HJ](#) [RFUH20TB3S](#) [RGP30G-E354](#) [RGP30M-E3/73](#) [D291S45T](#) [MCL4151-TR](#) [BAS 16-02L E6327](#) [BAS 16-02V H6327](#) [BAS 21U E6327](#) [BAS 28 E6327](#) [BAS33-TAP](#) [BAS 70-02V H6327](#) [BAV300-TR](#) [BAV303-TR3](#) [BAW27-TR](#) [BAW56DWQ-7-F](#) [BAW56M3T5G](#) [BAW75-TAP](#) [BAW76-TR](#) [MM230L-CAA](#) [MMSD914-TP](#) [IDW40E65D1](#)