



ELECTRONICS, INC.
 44 FARRAND STREET
 BLOOMFIELD, NJ 07003
 (973) 748-5089

NTE5608 thru NTE5610 TRIAC 8 Amp

Description:

The NTE5608 through NTE5610 series of TRIACs are high performance glass passivated PNP devices in a TO220 type package designed for general purpose applications where moderate gate sensitivity is required.

Absolute Maximum Ratings: ($T_A = +25^\circ\text{C}$ unless otherwise specified)

Repetitive Peak Off-State Voltage ($T_J = -40^\circ$ to $+125^\circ\text{C}$, $R_{GK} = 1\text{k}\Omega$), V_{DRM}		
NTE5608	400V
NTE5609	600V
NTE5610	800V
On-State Current (All Conduction Angles, $T_C = +85^\circ\text{C}$), $I_{T(RMS)}$		8A
Non-Repetitive On-State Current (Half Cycle), I_{TSM}		
60Hz	77A
50Hz	70A
Fusing Current ($t = 10\text{ms}$), I^2t		24A ² s
Peak Gate Current ($t = 10\mu\text{s}$ Max), I_{GM}		4A
Peak Gate Dissipation ($t = 10\mu\text{s}$ Max), P_{GM}		10W
Gate Dissipation ($t = 20\text{ms}$ Max), $P_{G(AV)}$		1W
Operating Junction Temperature Range, T_J		-40° to $+125^\circ\text{C}$
Storage Temperature Range, T_{stg}		-40° to $+125^\circ\text{C}$
Thermal Resistance, Junction-to-Case, R_{thJC}		3K/W
Thermal Resistance, Junction-to-Ambient, R_{thJA}		60K/W
Lead Temperature (During Soldering, 1.6mm from case, 10sec max), T_L		$+250^\circ\text{C}$


Electrical Characteristics: ($T_A = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Off-State Leakage Current	I_{DRM}	$V_D = V_{DRM}$, $R_{GK} = 1\text{k}\Omega$, $T_J = +25^\circ\text{C}$	-	-	5	μA
		$V_D = V_{DRM}$, $R_{GK} = 1\text{k}\Omega$, $T_J = +125^\circ\text{C}$	-	-	2	mA
On-State Voltage	V_T	$I_T = 12\text{A}$, $T_J = +25^\circ\text{C}$	-	-	1.85	V
On-State Threshold Voltage	$V_{T(TO)}$	$T_J = +125^\circ\text{C}$	-	-	1	V
On-State Slope Resistance	r_T	$T_J = +125^\circ\text{C}$	-	-	80	$\text{m}\Omega$

Electrical Characteristics (Cont'd): ($T_A = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Gate Trigger Current	I_{GT}	$V_D = 12\text{V}$, Note 1	–	–	10	mA
Gate Trigger Voltage	V_{GT}	$V_D = 12\text{V}$, All Quadrants	–	–	2.5	V
Holding Current	I_H	$R_{GK} = 1\text{k}\Omega$	–	–	10	mA
Critical Rate-of-Rise	dv/dt	$V_D = 0.67 \times V_{DRM}$, $R_{GK} = 1\text{k}\Omega$, $T_J = +125^\circ\text{C}$	50	–	–	V/ μs
Critical Rate-of-Rise, Off-State	dv/dt_c	$I_T = 8\text{A}$, $di/dt = 3.55\text{A/ms}$, $T_C = +85^\circ\text{C}$	2	–	–	V/ μs

Note 1. For either polarity of gate voltage with reference to electrode MT_1 .

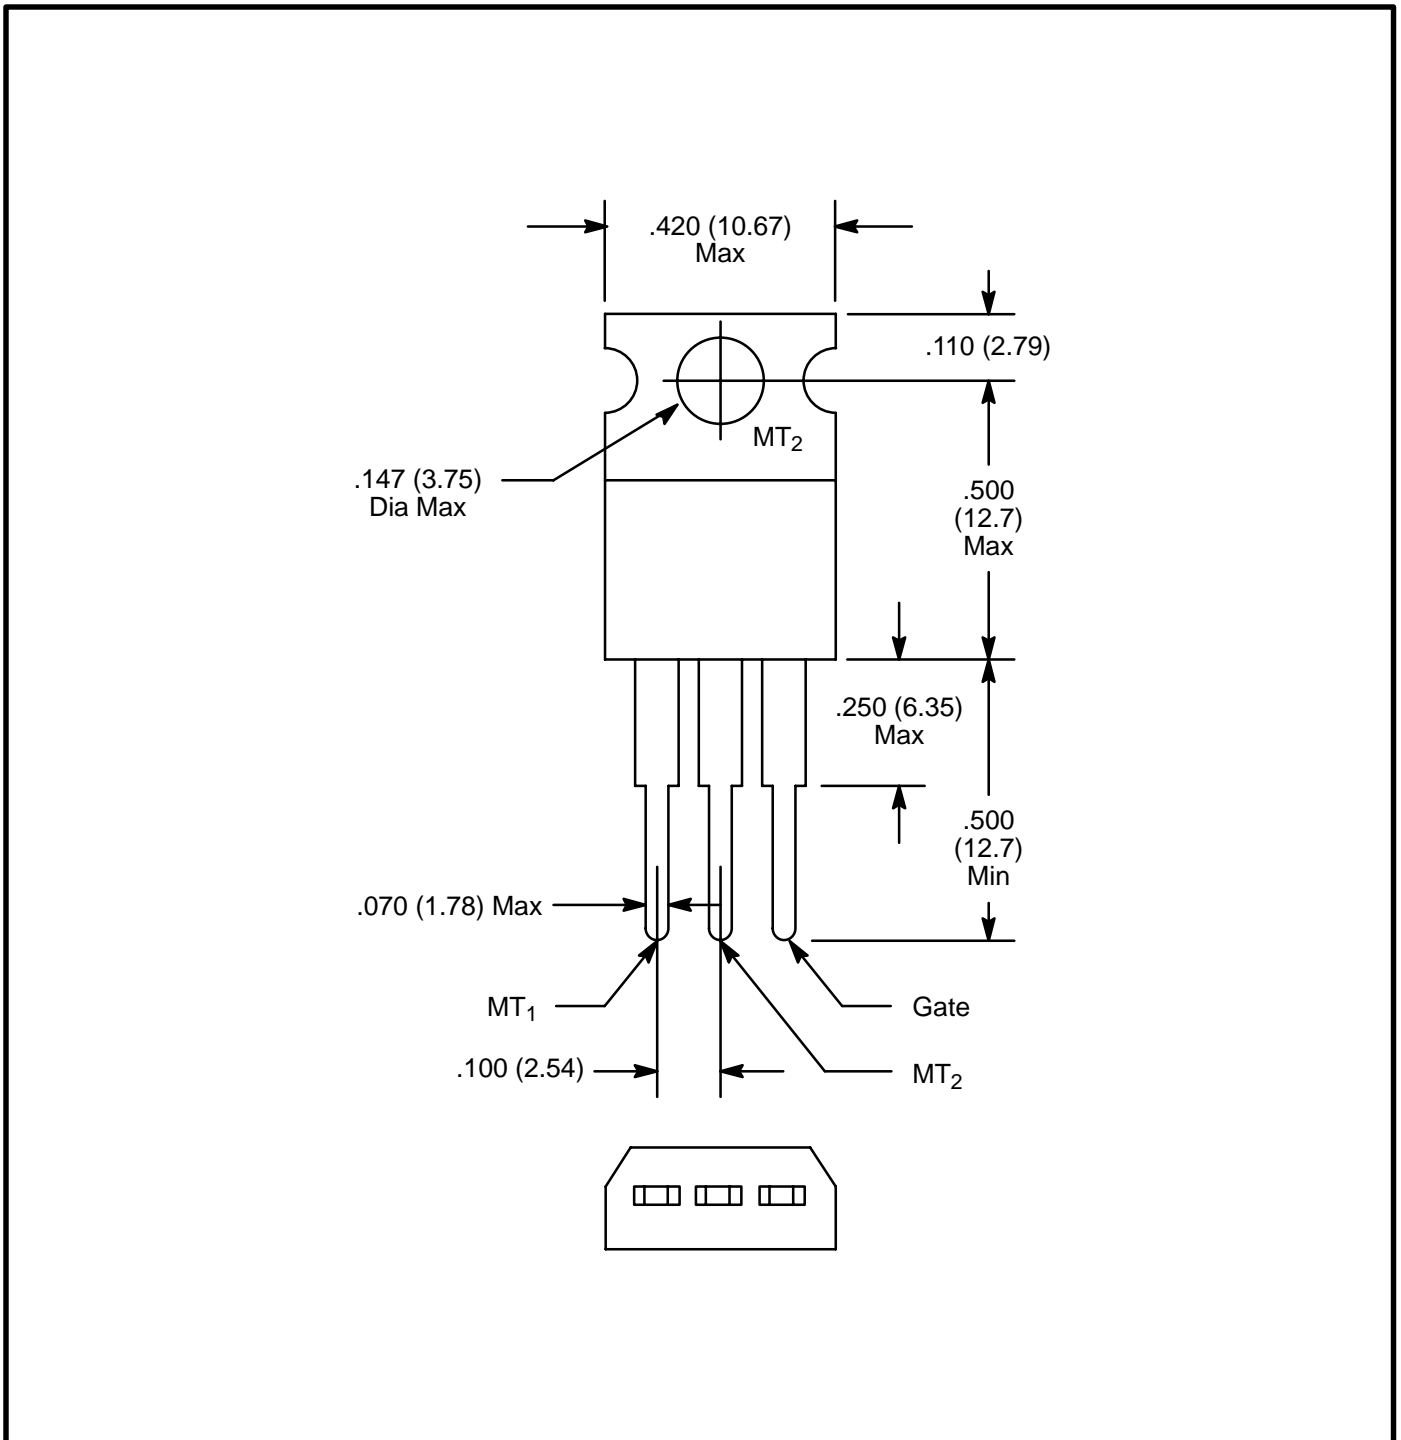

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Other Tools](#) category:

Click to view products by [NTE manufacturer](#):

Other Similar products are found below :

[CR-05FL7--150R](#) [CR-05FL7--698K](#) [899-2-KT46](#) [899-5-KT46](#) [CR-0AFL4--332K](#) [CR-12FP4--260R](#) [CRCW04021100FRT7](#)
[CRCW04021961FRT7](#) [5800-0090](#) [CRCW04024021FRT7](#) [CRCW040254R9FRT7](#) [CRCW0603102JRT5](#) [59065-5](#) [00-8273-RDPP](#) [00-8729-](#)
[WHPP](#) [593033](#) [593058](#) [593072](#) [593564100](#) [593575](#) [593591](#) [593593](#) [011349-000](#) [LTLA506SBLAMNBL](#) [CRCW08052740FRT1](#) [LUC-](#)
[012S070DSM](#) [LUC-018S070DSP](#) [599-2021-3-NME](#) [599-JJ-2021-03](#) [00-5080-YWPP](#) [5E4750/01-20R0-T/R](#) [LW1A-L1-GL](#) [LW1A-P1-GD](#)
[LW1L-A1C10V-GL](#) [LW1L-M1C70-A](#) [0202-0173](#) [00-9089-RDPP](#) [00-9300-RDPP](#) [CRCW2010331JR02](#) [01-1003W-8/32-10](#) [601-GP-08-](#)
[KT39](#) [601-JJ-06](#) [601-SPB](#) [601YSY](#) [602-JJ-03](#) [602SPB](#) [602Z](#) [603-JJ-07-FP](#) [603-JJY-04](#) [604J](#)