

# Coilcraft®



***Magnetics  
for RF, power,  
filter and data  
applications***

[www.coilcraft.com](http://www.coilcraft.com)

April 2018

# Contents

## Common Mode EMI/RFI Filters

High-Speed Data Line EMI Chokes.....	50
Data Line EMI Chokes.....	49
Data / Power Line Common Mode EMI Chokes.....	51
Surface Mount Power Line Common Mode EMI Chokes.....	53
Through-Hole Power Line Common Mode EMI Chokes.....	53

## RF Magnetics

Air Core Inductors.....	11
Chip Inductors.....	3
RFID Transponder Coils.....	13
Wideband Bias Chokes.....	13
Wideband RF Transformers.....	14

## Dual Inductors for Class-D

Surface Mount Dual Inductors.....	40
Through-Hole Dual Inductors.....	40

## Power Magnetics

Coupled Inductors.....	40
Current Sensors.....	48
Shielded Surface Mount Inductors.....	16
Unshielded Surface Mount Inductors.....	33
Through-Hole Inductors.....	37
Transformers, Flyback, Capacitor Charging, Cell Balancing.....	42-46
Transformers, Current Sensing.....	47
Transformers, Planar.....	42
Transformers, Step-Up.....	42
Designer's Kits.....	55

## Part Number Index

<b>0201AF</b> .....	3	CE2439L.....	53	LPS/LP23010.....	22	SER1052.....	28
0201DS.....	3	CF2638L.....	53	LPS/LP23015.....	22	SER1360.....	28
<b>0201HL</b> .....	3	CF2805.....	53	LPS/LP23314.....	22	SER1900.....	28
<b>026011C</b> .....	3	CF3094.....	53	LPS/LP24012.....	22	SER14xx.....	28
<b>026011F</b> .....	3	CG3333.....	53	LPS/LP24018.....	23	SER1590.....	29
0302CS.....	4	CG3528.....	53	LPS/LP24414.....	23	SER20xx.....	28
0402AF.....	4	CG3885.....	53	LPS/LP25010.....	23	SER29xx.....	29
0402CS.....	4	CH4659.....	53	LPS/LP25015.....	23	SER80xx.....	28
<b>0402DC</b> .....	4	CJ5094.....	53	LPS5030.....	24	SLC1049.....	30
0402DF.....	5	CM1394.....	50	LPS6225.....	24	SLC1175.....	31
0402HL.....	5	CM1394.....	50	LPS6235.....	24	SLC1480.....	31
0402HP.....	5	CM6518.....	53	LPS8045.....	24	SLC7530.....	30
0402PA.....	5	CMT.....	54	M2022.....	49	SLC7649.....	30
0403HQ.....	5	CQ7584.....	49	<b>MA5597</b> .....	46	SLR1050.....	31
0603AF.....	6	CR7856.....	49	ME3215.....	34	SLR1065.....	31
0603CS.....	7	CR7915.....	53	ME3220.....	34	SLR1070.....	31
0603CT.....	6	CS1xx.....	48	MLC12xx.....	30	SLR1075.....	31
0603HC.....	6	CS2106.....	48	MLC15xx.....	30	SLR1190.....	31
0603HL.....	7	CS4xx.....	47	MLC1770.....	30	SPT.....	32
0603HP.....	6	CS60.....	48	MLC75xx.....	30	<b>SRT0045</b> .....	27
0603LS.....	7	CST1/CST2.....	47	MOS6020.....	25	SWB.....	15
0603USB.....	50	CST2010.....	47	MSC1278.....	41	<b>TA7788</b> .....	45
0604HQ.....	7	<b>CST2020</b> .....	47	MSD1048.....	52	<b>TA7818</b> .....	44
0805AF.....	8	CST4835.....	47	MSD1260.....	41.52	<b>TA78xx</b> .....	11
0805CS.....	8	CST7030.....	47	MSD1278.....	41.52	76522.....	47
<b>0805HP</b> .....	8	CU8965.....	47	MSD1514.....	41.52	<b>UA7902</b> .....	45
0805HQ.....	8	CV9172.....	53	MSD1583.....	41.52	<b>UA801x</b> .....	39
0805HT.....	9	D18xx.....	48	MSD7342.....	40.52	VER2923.....	29
0805LS.....	8	<b>DF7160</b> .....	49	MSS1038.....	26	WB.....	15
0805USB.....	50	DO1605T.....	33	MSS1048.....	26	WBC.....	14
0805USBF.....	50	DO1606T.....	34	MSS1210.....	27	WBT.....	15
0805USBV.....	50	DO1607B.....	36	MSS1246.....	26	XAL1010.....	21
0806SQ.....	11	DO1608C.....	35	MSS1260.....	27	XAL1030.....	21
0807SQ.....	11	DO1813H.....	36	MSS1278.....	27	XAL1060.....	21
0906.....	12	DO3308P.....	35	MSS1583.....	27	<b>XAL1350</b> .....	21
0908SQ.....	11	DO3314.....	33	MSS5121.....	25	XAL1510.....	21
1008AF.....	10	DO3316H.....	36	MSS5131.....	25	XAL1580.....	21
1008CS.....	9	DO3316P.....	35	MSS6122.....	25	XAL40xx.....	19
1008CT.....	9	DO3316T.....	35	MSS6132.....	25	XAL5020.....	19
1008HQ.....	9	DO3340P.....	36	MSS7331.....	25	XAL5030.....	20
1008HT.....	9	DO5010H.....	36	MSS7341.....	26	XAL5050.....	20
1008LS.....	10	DO5022P.....	36	MSS7348.....	26	XAL6020.....	20
1010VS.....	12	DO5040H.....	36	MVR.....	32	XAL6030.....	20
1111SQ.....	11	DR.....	38	<b>PA6582</b> .....	45	XAL6060.....	20
1206CS.....	10	DS1608B.....	32	<b>PA659x</b> .....	11	XAL7020.....	20
1206USB.....	50	EPL2010.....	17	PDLF.....	49	XAL7030.....	20
1212VS.....	12	EPL2014.....	17	PDF2015.....	14,40,51	XAL7070.....	20
132-SM.....	12	EPL3010.....	17	PDF3215.....	14,40,51	XAL8080.....	21
1508.....	12	EPL3012.....	17	PFL1005.....	16	<b>XAR7030</b> .....	20
1515SQ.....	11	EPL3015.....	17	PFL1609.....	16	XEL3515.....	18
1606.....	12	EPL3314.....	17	PFL2010.....	16	<b>XEL3520</b> .....	18
1812CS.....	11	GA309x.....	12	PFL2015.....	16	<b>XEL3530</b> .....	18
1812FS.....	10	GA3416.....	39	PFL2510.....	16	XEL4012.....	19
1812LS.....	10	HA403x.....	11	PFL2512.....	16	XEL4014.....	19
1812SMS.....	12	HA4158.....	39	PFL3215.....	16	XEL4020.....	19
1812WBT.....	15	JA4575.....	39	PFL4514.....	16	XEL4030.....	19
2014VS.....	12	<b>KA5037</b> .....	46	PFL4517.....	16	<b>XEL50xx</b> .....	19
2222SQ.....	11	LPD3015.....	40,51	PL160.....	42	<b>XEL6030</b> .....	19
2508.....	12	LPD4012.....	40,51	PL300.....	42	<b>XEL6060</b> .....	19
2929SQ.....	11	LPD5010.....	40,51	POE120PL.....	42	XFL2005.....	17
4308RV.....	13	LPD5030.....	40,51	PTRF.....	49	XFL2006.....	17
4310LC.....	13	LPD5030V.....	42	PWB.....	14	XFL3010.....	18
4312RV.....	13	LPD8035V.....	42	RA6870.....	50	XFL3012.....	18
4513TC.....	13	LPD6235.....	40	RA7231.....	39	XFL4012.....	18
5315TC.....	13	<b>LPH8045</b> .....	41	RFB0807.....	38	XFL4015.....	18
A0Tx.....	12	LPQ2506.....	34	RFB0810.....	39	XFL4020.....	18
AGP2923.....	29	LPO3010.....	33	RFB1010.....	39	<b>XFL4030</b> .....	18
AGP4233.....	29	LPO3310.....	33	RFC0807.....	37	XFL5015.....	18
BxTx.....	12	LPD4812.....	33	RFC0810.....	38	<b>XFL5030</b> .....	18
BCL / BCR.....	13	LPD4815.....	33	RFC1010.....	38	XFL6012.....	18
BU.....	53	LPD6013.....	33	RFS.....	37	XFL7015.....	18
CD1479.....	53	LPD6610.....	34	SBU9.....	53	XPL2010.....	17
CD1480.....	53	LPR4012.....	42	SCS.....	47	<b>XTL7030</b> .....	20
CE1755.....	53	LPR6235.....	42	SD43.....	34		
CE1759.....	53	LPS/LP23008.....	22	SD54.....	35		

# Featured Products

## XEL50xx Ultra Low-loss Power Inductors


19



- Extremely low DCR and AC losses for switching frequencies up to 5+ MHz
- Low inductance values optimized for high frequency operation
- Current ratings up to 44 Amps with soft saturation characteristics
- Composite construction minimizes audible buzzing
- AEC-Q200 Grade 1 Qualified (-40°C to +125°C)

## 0402DC High Q Chip Inductors

4



- The industry's highest Q factors in an 0402 size – up to 162 at 2.4 GHz
- 26 standard inductance values ranging from 3.0 to 120 nH
- 73 additional values available upon request, including 0.1 nH increments from 2.8 nH to 10 nH
- Very high SRF – up to 15.78 GHz
- Lower DCR than other 0402 chip inductors

## CST2020 Current Sense Transformers

47



- Sense current up to 40 Amps from 400 Hz to 1 MHz
- Very low primary resistance
- 4000 Vrms, one minute isolation (hipot) winding to winding
- Meets Reinforced Insulation per UL 60950-1
- AEC-Q200 Grade 1 Qualified (-40°C to +125°C)

## SMT PowerLine Common Mode Chokes


51



- Solutions for use in a wide array of power line circuits
- Suppression of high frequency common mode noise up to 100 MHz
- Up to 10 Arms and 1500 Vrms isolation (hipot)
- Ideal for use in consumer electronics and industrial applications

## 0201AF/026011F Miniature Ferrite RF Chip Inductor

3



- 0201AF Series is the industry's smallest ferrite RF chip inductor and offers inductance values up to 200 nH
- The 026011F Series features a performance-optimized 0201 size (0.76 x 0.33 mm) to achieve inductance values up to 560 nH

## AEC-Q200 qualified products

are identified throughout the catalog with icons.



For additional information, please contact us for our Magnetics for automotive electronics brochure.



























# Wideband Bias Chokes

Coilcraft BCR and BCL conical inductors offer a flat bandwidth with high impedance to 40 GHz, and are ideal for use in bias tees. The BCR has a full-length cap that fully protects the coil and provides a large surface for pick and place. The BCL has "flying leads" that allows adjustment of the mounting angle. The 4310LC has a flat bandwidth to 6 GHz, making it the perfect solution for lower bandwidth, high power applications.

## BCL Conical Inductors


Part number	Inductance $\pm 5\%$ ( $\mu\text{H}$ )	Bandwidth	DCR max (Ohms)	Irms (A) 40°C rise
BCL-221JL	0.22	10MHz-40GHz	0.10	1.20
BCL-531JL	0.53	10MHz-40GHz	0.15	1.06
BCL-122JL	1.20	10MHz-40GHz	1.05	0.270
BCL-162JL	1.65	10MHz-40GHz	0.60	0.490
BCL-232JL	2.35	10MHz-40GHz	1.61	0.270
BCL-272JL	2.75	10MHz-40GHz	0.40	0.675
BCL-632JL	6.35	10MHz-40GHz	0.92	0.480
BCL-652JL	6.50	10MHz-40GHz	0.70	0.650
BCL-802JL	8.00	10MHz-40GHz	3.39	0.230

## BCR Conical Inductors

Part number	Inductance $\pm 5\%$ ( $\mu\text{H}$ )	Bandwidth	DCR max (Ohms)	Irms (A) 40°C rise
BCR-221JLC	0.22	10MHz-40GHz	0.10	1.20
BCR-531JLC	0.53	10MHz-40GHz	0.15	1.06
BCR-122JLC	1.20	10MHz-40GHz	1.05	0.270
BCR-162JLC	1.65	10MHz-40GHz	0.60	0.490
BCR-232JLC	2.35	10MHz-40GHz	1.61	0.270
BCR-272JLC	2.75	10MHz-40GHz	0.40	0.675
BCR-632JLC	6.35	10MHz-40GHz	0.92	0.480
BCR-652JLC	6.50	10MHz-40GHz	0.70	0.650
BCR-802JLC	8.00	10MHz-40GHz	3.39	0.230

## 4310LC Wideband Bias Chokes

Part number	Inductance $\pm 10\%$ ( $\mu\text{H}$ )	SRF (typ) (MHz)	Bandwidth	DCR (max) (mOhms)	Irms (A) 40°C rise
4310LC-132KEC	1.30	235	10MHz-6GHz	15.1	4.2
4310LC-352KEC	3.50	188	10MHz-6GHz	49.0	3.1

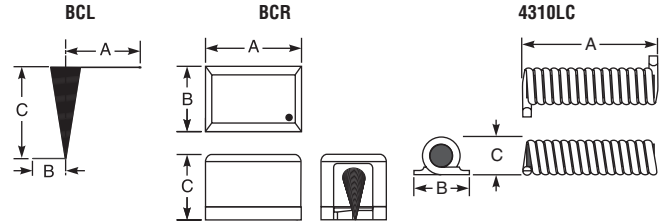

### Dimensions (inches mm)

Series	A max	B max	C max
BCL-221	0.166 4.22	0.100 2.54	0.138 3.51
BCL-531	0.166 4.22	0.100 2.54	0.179 4.55
BCL-122	0.166 4.22	0.100 2.54	0.115 2.92
BCL-162	0.166 4.22	0.100 2.54	0.174 4.42
BCL-232	0.166 4.22	0.100 2.54	0.150 3.81
BCL-272	0.275 6.99	0.100 2.54	0.310 7.87
BCL-632	0.275 6.99	0.100 2.54	0.340 8.62
BCL-652	0.390 9.91	0.100 2.54	0.435 11.05
BCL-802	0.180 4.57	0.100 2.54	0.237 6.00

### Dimensions (inches mm)

Series	A max	B max	C max
BCR-221	0.220 5.59	0.150 3.81	0.160 4.06
BCR-531	0.220 5.59	0.150 3.81	0.160 4.06
BCR-122	0.120 3.05	0.100 2.54	0.110 2.79
BCR-162	0.220 5.59	0.150 3.81	0.160 4.06
BCR-232	0.220 5.59	0.150 3.81	0.160 4.06
BCR-272	0.440 11.18	0.220 5.59	0.220 5.59
BCR-632	0.440 11.18	0.220 5.59	0.220 5.59
BCR-652	0.440 11.18	0.220 5.59	0.220 5.59
BCR-802	0.220 5.59	0.150 3.81	0.160 4.06
4310LC	0.460 11.68	0.220 4.90	0.140 3.554

# SM RFID Transponder Coils

These Coilcraft transponder coils are designed for RFID applications at 125 kHz. The 4312RV and 5315TC were designed to withstand harsh mechanical shock and are well suited for use in tire pressure monitoring systems.

## 4308RV High Temperature

Part number	Inductance at 125 kHz (mH)	Percent tol*	Q min	Read distance (inches/cm)	Sensitivity (mV/ $\mu\text{T}$ )	Matching capacitor (pF)	DCR max (Ohms)	SRF typ (kHz)
4308RV-374X_LD	0.37	5.2	26	22/55.9	9.82	4380	6.5	1800
4308RV-404X_LD	0.40	5.2	26	23/58.4	10.38	4050	7.1	5000
4308RV-704X_LD	0.70	5.2	20	25/63.5	13.96	2320	19	6600
4308RV-904X_LD	0.90	5.2	22	26/66.0	16.06	1800	21	4800
4308RV-115X_LD	1.08	5.2	24	30/76.2	17.78	1500	24	4300
4308RV-205X_LD	1.97	5.2	28	34/86.4	24.90	823	31	1750
4308RV-245X_LD	2.38	5.2	30	37/94.0	28.21	681	34	1700
4308RV-295X_LD	2.89	5.2	30	37/94.0	32.12	561	42	1900
4308RV-335X_LD	3.30	5.2	30	38/96.5	34.96	491	48	1425
4308RV-415X_LD	4.15	5.2	27	39/99.1	41.35	391	70	1620
4308RV-495X_LD	4.90	5.2	26	38/96.5	47.17	331	93	1150
4308RV-685X_LD	6.80	5.2	28	41/104.1	61.71	238	110	1080
4308RV-715X_LD	7.10	5.2	27	42/106.7	65.60	228	114	1050
4308RV-725X_LD	7.20	5.2	28	40/101.6	66.67	225	114	965
4308RV-815X_LD	8.10	5.2	28	42/106.7	75.08	200	125	965
4308RV-905X_LD	9.00	5.2	30	40/101.6	84.64	180	125	725

## 4312RV Rugged

Part number	Inductance at 125 kHz (mH)	Percent tol	Q min	Read distance (inches/cm)	Sensitivity (mV/ $\mu\text{T}$ )	Matching capacitor (pF)	DCR max (Ohms)	SRF typ (kHz)
4312RV-404XGLD	0.40	2	21	19.65/49.91	9.14	4050	11.5	6340
4312RV-105XGLD	1.00	2	21	24.25/61.60	15.26	1621	29	4150
4312RV-245XGLD	2.38	2	26	28.35/72.01	24.72	681	55	2470
4312RV-495XGLD	4.90	2	24	32.85/83.44	42.45	331	103	1270
4312RV-725XGLD	7.20	2	30	35.05/89.03	60.02	225	128	1465
4312RV-905XGLD	9.00	2	32	35.80/91.00	78.10	180	150	1200

## 4513TC High Sensitivity

Part number	Inductance at 125 kHz (mH)	Percent tol	Q min	Read distance (inches/cm)	Sensitivity (mV/ $\mu\text{T}$ )	Matching capacitor (pF)	DCR max (Ohms)	SRF typ (kHz)
4513TC-404XGLD	0.40	2	29	23.90/60.71	11.76	4050	9.66	5890
4513TC-105XGLD	1.00	2	33	30.95/78.61	19.80	1621	20.6	3670
4513TC-245XGLD	2.38	2	40	36.75/93.35	32.80	681	39.0	2200
4513TC-495XGLD	4.90	2	44	38.55/97.92	54.76	331	55.8	1551
4513TC-725XGLD	7.20	2	51	44.10/112.01	76.97	225	91.0	1400

## 5315TC Rugged

Part number	Inductance at 125 kHz (mH)	Percent tol	Q min	Read distance (inches/cm)	Sensitivity (mV/ $\mu\text{T}$ )	Matching capacitor (pF)	DCR max (Ohms)	SRF typ (kHz)
5315TC-374XGLD	0.37	2	8	16/40.6	8.32	4380	24	7100
5315TC-404XGLD	0.40	2	8	17/43.2	8.67	4050	25	7300
5315TC-704XGLD	0.70	2	12	21/53.3	11.43	2320	33	4500
5315TC-904XGLD	0.90	2	12	21/53.3	13.35	1800	38	3800
5315TC-105XGLD	1.00	2	12	23/58.4	14.07	1600	40	2500
5315TC-115XGLD	1.08	2	13	23/58.4	14.65	1500	40	2300
5315TC-205XGLD	1.97	2	14	25/63.5	21.28	820	70	2300
5315TC-245XGLD	2.38	2	12	26/66.0	23.97	680	80	2400
5315TC-335XGLD	3.30	2	14	27/68.6	29.70	490	95	1800
5315TC-415XGLD	4.15	2	15	29/73.7	34.95	390	103	1260
5315TC-495XGLD	4.90	2	15	28/71.1	40.00	330	150	1550
5315TC-685XGLD	6.80	2	13	30/76.2	53.87	240	180	1350
5315TC-715XGLD	7.10	2	14	30/76.2	55.41	220	176	890
5315TC-725XGLD	7.20	2	17	30/76.2	56.74	220	165	880

Series	A max	B max	C max
4308RV	0.450 11.43	0.108 2.74	0.083 2.10
4312RV	0.448 11.38	0.136 3.45	0.092 2.34
4513TC	0.461 11.70	0.138 3.50	0.102 2.60
5315TC	0.536 13.61	0.150 3.81	0.089 2.26






# SM Wideband RF Transformers

## PWB




Type	Part number	Imp ratio	Bandwidth (MHz)	I <sub>rms</sub> (mA)	Insertion loss (dB)	Pins 1-3		Pins 6-4	
						L min (µH)	DCR max (Ohms)	L min (µH)	DCR max (Ohms)
A	PWB-1-ALD	1:1	0.080 - 450	250	0.60	40	0.070	40	0.070
A	PWB-1.5-ALD	1:1.5	0.030 - 300	250	0.35	110	0.080	160	0.110
A	PWB-2-ALD	1:2	0.050 - 200	250	0.25	75	0.088	150	0.120
A	PWB-4-ALD	1:4	0.150 - 500	250	0.50	25	0.075	98	0.135
A	PWB-16-ALD	1:16	0.050 - 80	250	0.35	75	0.260	1250	0.910
A	PWB1010LD	1:1	0.0035 - 125	250	0.20	780	0.320	780	0.320
A	PWB1010-1LD	1:1	0.03 - 250	250	0.20	95	0.200	95	0.200
A	PWB1015LD	1:1.5	0.07 - 225	250	0.40	51	0.130	80	0.145
A	PWB1040LD	1:4	0.15 - 400	250	0.40	25	0.115	95	0.160
B	PWB-1-BLD	1:1	0.130 - 425	250	0.40	22	0.070	22	0.070
B	PWB-1.5-BLD	1:1.5	0.500 - 250	250	0.40	140	0.100	200	0.120
B	PWB-2-BLD	1:2	0.200 - 400	250	0.35	75	0.088	150	0.130
B	PWB-4-BLD	1:4	0.140 - 700	250	0.50	25	0.075	98	0.135
B	PWB-16-BLD	1:16	0.075 - 90	250	0.30	75	0.260	1250	0.910
B	PWB2010LD	1:1	0.0035 - 125	250	0.20	780	0.320	780	0.320
B	PWB2010-1LD	1:1	0.03 - 250	250	0.20	95	0.200	95	0.200
B	PWB2040LD	1:4	0.15 - 400	250	0.40	25	0.115	95	0.160
C	PWB-1-CLD	1:1	0.100 - 300	250	0.60	22	0.070	22	0.070
C	PWB-1.5-CLD	1:1.5	0.150 - 200	250	0.30	140	0.110	200	0.120
C	PWB-2-CLD	1:2	0.130 - 285	250	0.30	75	0.105	150	0.130
C	PWB-4-CLD	1:4	0.140 - 500	250	0.50	25	0.075	98	0.135
C	PWB3010LD	1:1	0.0035 - 125	250	0.20	780	0.320	780	0.320
C	PWB3010-1LD	1:1	0.03 - 250	250	0.20	95	0.200	95	0.200
C	PWB3015LD	1:1.5	0.07 - 225	250	0.40	51	0.130	80	0.145
C	PWB3040LD	1:4	0.15 - 400	250	0.40	25	0.115	95	0.160



Dimensions (inches mm)


A	B	C	D	E	F
0.256 6,48	0.283 7,2	0.175 4,45	0.04 1,00	0.10 2,54	0.02 0,5

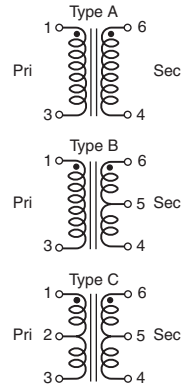

## WBC




Type	Part number	Imp ratio	Bandwidth (MHz)	Insertion loss max (dB)	Pins 4-6		Pins 1-3	
					L min (µH)	DCR max (mOhms)	L min (µH)	DCR max (mOhms)
A	WBC1-1LC	1:1	0.400-600	0.40	10	120	10	120
B	WBC1-1TLC	1:1	0.250-750	0.58	9.5	75	9.5	75
B	WBC2-1TLC	1:2	0.200-500	0.50	10	120	20	150
B	WBC3-1TLC	1:3	0.300-900	0.60	9	100	27	150
B	WBC4-1TLC	1:4	0.250-750	1.0	9	55	36	120
B	WBC4-14LC	1:4	1.500-1200	2.0	2	50	8	100
B	WBC4-1WLC	1:4	0.500-1000	0.90	5	80	20	120
B	WBC4-6TLC	1:4	0.300-700	0.65	9	80	36	200
D	WBC8-1LC	1:8	0.150-600	0.60	22	120	176	310
B	WBC9-1LC	1:9	0.300-500	0.54	9	80	81	230
B	WBC16-1TLC	1:16	0.600-300	0.80	5	80	80	230
C	WBC4-4LC	1:4	0.250-800	1.0	9	60	36	120




Dimensions (inches mm)

A max	B max	C max
0.175 4,45	0.165 4,19	0.120 3,05




## PFD2015

Part number	Imp ratio	Bandwidth (MHz)	I <sub>rms</sub> (mA)	Insertion loss max (dB)	L/winding (µH)	Test freq (MHz)	DCR max (Ohms)	Isolation (Vrms)
PFD2015-102MEC	1:1	4.6 - 750	1130	0.5	0.80	0.100	0.165	250
PFD2015-122MEC	1:1	4.0 - 730	1060	0.4	0.96	0.100	0.175	250
PFD2015-182MEC	1:1	2.2 - 490	690	0.4	1.44	0.100	0.294	250
PFD2015-272MEC	1:1	1.5 - 410	580	0.4	2.16	0.100	0.477	250
PFD2015-332MEC	1:1	1.2 - 340	525	0.5	2.64	0.100	0.670	250
PFD2015-472MEC	1:1	0.8 - 230	370	0.4	3.76	0.100	1.00	250
PFD2015-682MEC	1:1	0.6 - 200	265	0.5	5.44	0.100	1.75	250
PFD2015-822MEC	1:1	0.5 - 174	210	0.5	6.56	0.100	2.50	250
PFD2015-103MEC	1:1	0.4 - 130	185	0.7	8.00	0.100	3.40	250



Dimensions (inches mm)

Series	A max	B max	C max	D	E
PFD2015	0.090 2,29	0.060 1,52	0.059 1,50	0.014 0,356	0.017 0,342
PFD3215	0.131 3,32	0.092 2,33	0.059 1,50	0.014 0,356	0.025 0,635



## PFD3215


Part number	Imp ratio	Bandwidth (MHz)	I <sub>rms</sub> (A)	Insertion loss max (dB)	L/winding (µH)	Test freq (MHz)	DCR max (Ohms)	Isolation (Vrms)
PFD3215-391MEC	1:1	12.6 - 645	1.39	0.6	0.31	0.100	0.070	250
PFD3215-102MEC	1:1	4.0 - 500	1.20	0.4	0.80	0.100	0.123	250
PFD3215-182MEC	1:1	2.2 - 300	0.85	0.5	1.4	0.100	0.250	250
PFD3215-222MEC	1:1	2.0 - 370	0.81	0.4	1.7	0.100	0.265	250
PFD3215-332MEC	1:1	1.2 - 310	0.78	0.6	2.6	0.100	0.335	250
PFD3215-472MEC	1:1	0.9 - 250	0.72	0.5	3.7	0.100	0.442	250
PFD3215-682MEC	1:1	0.8 - 150	0.57	0.5	5.4	0.100	0.600	250
PFD3215-103MEC	1:1	0.4 - 150	0.38	0.5	8.0	0.100	1.25	250








# SM/TH Wideband Transformers

## 1812WBT



Part number	Imp ratio	Bandwidth (MHz)	I <sub>rms</sub> (mA)	Insertion loss (dB)	L/winding (µH)	Test freq (MHz)	DCR max (Ohms)	Isolation (Vrms)
1812WBT-1LC	1:1	0.340 - 22	200	<1	14	10	4.8	50
1812WBT-2LC	1:1	0.800 - 60	400	<1	5.3	10	1.8	50
1812WBT-3LC	1:1	4 - 200	500	<1	1.25	50	0.7	50
1812WBT-4LC	1:1	11 - 480	700	<1	0.22	50	0.3	50
1812WBT-5LC	1:1	48 - 645	700	<1.5	0.09	50	0.15	50
1812WBT1.5-1LC	1.5:1	1.3 - 100	400	0.5	5.0/3.3	10	1.05/0.87	50
1812WBT1.5-2LC	1.5:1	2.75 - 135	500	0.5	2.5/1.6	10	0.74/0.58	50
1812WBT1.5-3LC	1.5:1	7.2 - 200	500	0.75	1.0/0.6	10	0.43/0.34	50
1812WBT1.5-4LC	1.5:1	38 - 535	700	2.25	0.144/0.090	10	0.18/0.14	50
1812WBT2-1LC	2:1	0.800 - 23	200	<1.5	13.80/6.90	10	4.6/3.2	50
1812WBT2-2LC	2:1	2.2 - 65	400	<1.5	5.850/2.925	10	1.25/0.95	50
1812WBT2-3LC	2:1	4 - 105	600	<1.5	2.60/1.30	10	0.52/0.42	50
1812WBT2-4LC	2:1	11 - 200	700	<1.5	0.910/455	50	0.27/0.23	50






Dimensions (inches mm)

A max	B max	C max	D	E	F
0.195 4,95	0.150 3,81	0.135 3,43	0.030 0,76	0.040 1,02	0.070 1,78

## WB, WBT



Type	SM part number	TH part number	Imp ratio	Bandwidth (MHz)	Pins 4-6		Pins 1-3	
					L min (µH)	DCR max (mOhms)	L min (µH)	DCR max (mOhms)
A	WB1-1SLD	WB1-1L	1:1	0.150 - 500	27	75	27	75
A	WB1-6SLD	WB1-6L	1:1	0.100 - 350	25	100	25	100
A	WB1.18-3SLD	WB1.18-3L	1:1.18	0.040 - 300	90	300	108	330
A	WB1.5-6SLD	WB1.5-6L	1:1.5	0.050 - 325	56	120	84	150
A	WB2-1-2WSLD	WB2-1-2WL	1:2	0.080 - 700	38	100	75	150
A	WB2.5-6SLD	WB2.5-6L	1:2.5	0.080 - 225	30	100	75	130
A	WB4-6SLD	WB4-6L	1:4	0.100 - 125	25	100	100	200
A	WB9-1SLD	WB9-1L	1:9	0.125 - 125	25	100	225	250
A	WB16-1SLD	WB16-1L	1:16	0.050 - 100	56	75	896	330
A	WB36-1SLD	WB36-1L	1:36	0.100 - 45	25	50	900	180
B	WB1-1TSLD	WB1-1TL	1:1	0.100 - 375	25	100	25	100
B	WB1-6TSLD	WB1-6TL	1:1	0.050 - 200	70	150	70	150
B	WB2-1TSLD	WB2-1TL	1:2	0.070 - 400	38	100	75	150
B	WB2.5-6TSLD	WB2.5-6TL	1:2.5	0.050 - 125	56	120	140	200
B	WB3-1TSLD	WB3-1TL	1:3	0.040 - 500	96	110	270	200
B	WB4-1HSLD	WB4-1HL	1:4	0.100 - 500	25	120	100	160
B	WB4-6TSLD	WB4-6TL	1:4	0.050 - 200	43	120	172	160
B	WB5-1TSLD	WB5-1TL	1:5	0.050 - 400	48	220	240	500
B	WB8-1TSLD	WB8-1TL	1:8	0.150 - 400	18	100	144	270
B	WB13-1TSLD	WB13-1TL	1:13	0.150 - 125	17	90	221	200
B	WB16-6TSLD	WB16-6TL	1:16	0.050 - 100	56	75	896	330
C	WBT1-6SLD	WBT1-6L	1:1	0.040 - 200	70	150	70	150
C	WBT1.5-1SLD	WBT1.5-1L	1:1.5	0.040 - 350	48	150	70	180
C	WBT2.5-6SLD	WBT2.5-6L	1:2.5	0.050 - 100	70	150	175	200
C	WBT4-1SLD	WBT4-1L	1:3	0.040 - 150	45	120	135	160
C	WBT4-1ASLD	WBT4-1AL	1:4	0.040 - 350	96	110	384	220
C	WBT16-1SLD	WBT16-1L	1:16	0.100 - 100	25	100	400	300
C	WBT25-1SLD	WBT25-1L	1:25	0.100 - 65	25	100	625	350

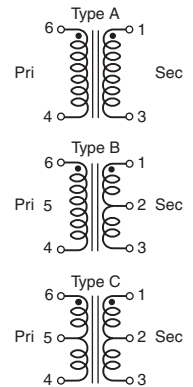




Dimensions (inches mm)

Series	A max	B max	C max	D ref	E	F	G max
SM	0.325 8,26	0.285 7,24	0.225 5,72	0.400 10,16	0.520 13,2	0.10 2,5	0.025 0,64
Leaded	0.325 8,26	0.285 7,24	0.225 5,72	0.300 7,62		0.10 2,5	

## SWB



Type	SM part number	TH part number	Imp ratio	Bandwidth (MHz)	Pins 1-3		Pins 6-4	
					L min (µH)	DCR max (mOhms)	L min (µH)	DCR max (mOhms)
A	SWB1010-SMLD	SWB1010-PCL	1:1	0.005 - 100	780	320	780	320
A	SWB1010-1-SMLD	SWB1010-1-PCL	1:1	0.040 - 175	95	200	95	200
A	SWB1015-SMLD	SWB1015-PCL	1.5:1	0.100 - 150	80	145	51	130
A	SWB1040-SMLD	SWB1040-PCL	4:1	0.200 - 300	95	160	25	115
B	SWB2010-SMLD	SWB2010-PCL	1:1	0.005 - 100	780	320	780	320
B	SWB2010-1-SMLD	SWB2010-1-PCL	1:1	0.040 - 175	95	200	95	200
B	SWB2040-SMLD	SWB2040-PCL	4:1	0.200 - 300	95	160	25	115
C	SWB3010-SMLD	SWB3010-PCL	1:1	0.005 - 100	780	320	780	320
C	SWB3010-1-SMLD	SWB3010-1-PCL	1:1	0.040 - 175	95	200	95	200
C	SWB3015-SMLD	SWB3015-PCL	1.5:1	0.100 - 150	80	145	51	130
C	SWB3040-SMLD	SWB3040-PCL	4:1	0.200 - 300	95	160	25	115

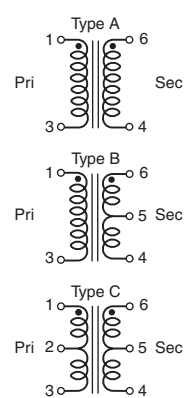

Dimensions (inches mm)

Series	A max	B max	C max	D ref	E	F	G max
SM	0.325 8,26	0.285 7,24	0.225 5,72	0.400 10,16	0.520 13,2	0.10 2,5	0.025 0,64
TH	0.325 8,26	0.285 7,24	0.225 5,72	0.300 7,62		0.10 2,5	













## XAL8080 High Current



Part number	Inductance ±20% (µH)	DCR (mOhms)		SRF typ (MHz)	Isat (A) 30% drop	I <sub>rms</sub> (A)	
		nom	max			20°C rise	40°C rise
XAL8080-681MED	0.68	1.38	1.65	70.00	38.0	27.0	37.0
XAL8080-102MED	1.0	2.11	2.33	49.22	31.3	24.9	34.1
XAL8080-222MED	2.2	4.08	4.49	36.73	24.0	16.0	21.5
XAL8080-472MED	4.7	8.89	9.77	24.14	17.4	10.5	14.6
XAL8080-682MED	6.8	13.2	14.5	20.64	14.0	8.0	11.3
XAL8080-103MED	10	21.0	23.1	15.63	10.9	6.6	8.7



## XAL1350 High Current



**NEW!**

Part number	Inductance ±20% (µH)	Percent Tolerance*	DCR (mOhms)		SRF typ (MHz)	Isat (A) 30% drop	I <sub>rms</sub> (A)	
			nom	max			20°C rise	40°C rise
XAL1350-631_ED	0.63	30,20	1.50	1.70	50	74	28	38
XAL1350-931_ED	0.93	30,20	2.00	2.20	42	60	25	33
XAL1350-132_ED	1.3	30,20	2.50	2.70	33	56	23	32
XAL1350-222_ED	2.2	30,20	4.16	4.80	23	46	19	24
XAL1350-302_ED	3.0	30,20	5.86	6.80	19	37	16	21



## XAL1010 High Current



Part number	Inductance ±20% (µH)	DCR (mOhms)		SRF typ (MHz)	Isat (A) 30% drop	I <sub>rms</sub> (A)	
		nom	max			20°C rise	40°C rise
XAL1010-221MED	0.22	0.45	0.50	115	98.8	41.0	55.5
XAL1010-451MED	0.45	0.65	0.72	66	70.5	40.0	53.0
XAL1010-681MED	0.68	0.87	0.96	53	62.0	36.0	48.0
XAL1010-102MED	1.0	1.00	1.10	42	55.0	32.0	43.5
XAL1010-152MED	1.5	1.60	1.76	33	36.6	31.0	40.5
XAL1010-222MED	2.2	2.55	2.80	22	34.0	24.5	32.0
XAL1010-332MED	3.3	3.70	4.10	21	27.4	18.2	25.0
XAL1010-472MED	4.7	5.20	5.70	19	25.4	17.5	24.0
XAL1010-562MED	5.6	6.30	6.93	16	23.6	15.7	21.2
XAL1010-682MED	6.8	8.10	8.90	14	21.8	14.0	18.5
XAL1010-822MED	8.2	11.70	12.90	12	18.3	12.9	17.1
XAL1010-103MED	10	13.40	14.75	11	17.5	11.5	15.5
XAL1010-153MED	15	16.90	18.60	9	15.5	9.9	13.8



## XAL1580 High Current



Part number	Inductance ±20% (µH)	DCR (mOhms)		SRF typ (MHz)	Isat (A) 30% drop	I <sub>rms</sub> (A)	
		nom	max			20°C rise	40°C rise
XAL1580-401MED	0.40	0.50	0.70	53.0	111	47.0	60.0
XAL1580-741MED	0.74	0.72	0.86	35.1	86.0	43.2	59.7
XAL1580-102MED	1.0	0.93	1.12	30.0	73.5	40.6	57.5
XAL1580-132MED	1.3	1.15	1.38	26.2	65.0	34.6	46.7
XAL1580-182MED	1.8	1.61	1.93	21.3	57.0	33.2	43.8
XAL1580-202MED	2.0	1.91	2.29	20.1	51.0	29.5	39.9
XAL1580-302MED	3.0	2.62	3.10	16.0	43.0	25.6	34.4
XAL1580-452MED	4.5	3.82	4.58	12.5	34.2	20.4	27.0
XAL1580-532MED	5.3	4.35	5.22	11.8	33.0	19.5	26.5
XAL1580-612MED	6.1	5.66	6.79	11.7	31.0	16.9	22.6



## XAL1030 High Current



Part number	Inductance ±20% (µH)	DCR (mOhms)		SRF typ (MHz)	Isat (A) 30% drop	I <sub>rms</sub> (A)	
		nom	max			20°C rise	40°C rise
XAL1030-161MEC	0.16	1.10	1.21	120	88.0	28.0	42.0
XAL1030-301MEC	0.30	1.55	1.70	78	68.0	25.5	35.0
XAL1030-561MEC	0.56	2.50	2.75	53	44.0	23.0	32.0
XAL1030-102MEC	1.0	4.50	4.95	41	35.0	16.0	23.0



## XAL1510 High Current




Part number	Inductance ±20% (µH)	DCR (mOhms)		SRF typ (MHz)	Isat (A) 30% drop	I <sub>rms</sub> (A)	
		nom	max			20°C rise	40°C rise
XAL1510-472MED	4.7	3.35	3.80	12.7	39.0	21	29
XAL1510-682MED	6.8	4.17	4.60	11.5	36.0	19	26
XAL1510-822MED	8.2	6.00	7.50	10.8	30.0	18	24
XAL1510-103MED	10	6.80	9.00	10.1	26.3	16	22
XAL1510-153MED	15	9.17	12.4	8.0	23.0	13	18
XAL1510-223MED	22	14.5	16.0	6.3	18.7	10.5	14
XAL1510-333MED	33	18.7	20.0	5.8	16.7	8.6	12



## XAL1060 High Current



Part number	Inductance ±20% (µH)	DCR (mOhms)		SRF typ (MHz)	Isat (A) 30% drop	I <sub>rms</sub> (A)	
		nom	max			20°C rise	40°C rise
XAL1060-181MEC	0.18	0.50	0.55	68	120	28.8	46.0
XAL1060-401MEC	0.40	0.80	0.88	60	82	25.9	36.8
XAL1060-681MEC	0.68	1.35	1.50	51	52	22.4	33.9
XAL1060-122MEC	1.2	2.50	2.75	44	43	17.9	26.3
XAL1060-152MEC	1.5	3.00	3.30	36	36	16.0	24.4
XAL1060-222MED	2.2	4.50	4.95	25	32	13.9	20.0
XAL1060-332MEC	3.3	7.20	7.92	19	26	11.2	16.8
XAL1060-472MEC	4.7	9.75	10.72	16	25	8.5	14.0

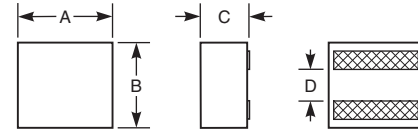

Dimensions (inches mm)

Series	A max	B max	C max	D
XAL8080	0.327 8.31	0.347 8.81	0.315 8.0	0.140 3.56
XAL1010	0.465 11.8	0.414 10.5	0.394 10.0	0.175 4.45
XAL1030	0.465 11.8	0.414 10.5	0.122 3.1	0.175 4.45
XAL1060	0.465 11.8	0.414 10.5	0.236 6.0	0.175 4.45
XAL1350	0.559 14.2	0.520 13.2	0.197 5.0	0.238 6.05
XAL1510	0.646 16.4	0.606 15.4	0.394 10.0	0.234 5.95
XAL1580	0.646 16.4	0.606 15.4	0.315 8.0	0.234 5.95

\* Bold numbers indicate tolerances carried in stock. When ordering, please replace underscore in part number with the proper tolerance code: N = 30%, M = 20%. (e.g. XAL1350-302MED for a 30% tolerance part.)

















Q200  
85°


### SER1590 High Current



Part number	Inductance ±20% (µH)	DCR (mΩhms)		SRF typ (MHz)	Isat (A)			Irms (A)
		nom	max		10% drop	20% drop	30% drop	
SER1590-301MLD	0.30	0.66	0.72	260	53	56	57	32
SER1590-501MLD	0.50	0.87	0.94	202	39	42	44	27
SER1590-601MLD	0.60	0.87	0.94	182	33	35	36	27
SER1590-681MLD	0.68	0.87	0.94	160	30	32	33	27
SER1590-801MLD	0.80	0.87	0.94	123	25	26	27	27
SER1590-901MLD	0.90	1.08	1.15	160	27	28	29	22
SER1590-102MLD	1.0	0.87	0.94	115	20	22	23	27
SER1590-122MLD	1.2	1.08	1.15	90	20	22	23	22
SER1590-152MLD	1.5	1.08	1.15	73	17	18	19	22

Q200  
140°


### AGP2923 High Current



Part number	Inductance ±10% (µH)	DCR (mΩhms)		SRF typ (MHz)	Isat (A)			Irms (A)	
		nom	max		10% drop	20% drop	30% drop	20°C rise	40°C rise
AGP2923-332KL	3.3	2.3	2.6	40	95.0	104	108	19	26
AGP2923-472KL	4.7	2.3	2.6	30	63.0	72.0	76.0	19	26
AGP2923-682KL	6.8	2.3	2.6	25	48.0	53.0	56.0	19	26
AGP2923-103KL	10	2.3	2.6	20	30.0	34.0	37.0	19	26
AGP2923-153KL	15	2.3	2.6	16	20.5	23.0	24.5	19	26
AGP2923-223KL	22	2.3	2.6	13	12.2	14.7	16.4	19	26
AGP2923-333KL	33	2.3	2.6	10	7.5	9.2	10.3	19	26

Q200  
85°

### SER2900 High Current




Part number	Inductance ±10% (µH)	DCR (mΩhms)		SRF typ (MHz)	Isat (A)			Irms (A)	
		nom	max		10% drop	20% drop	30% drop	20°C rise	40°C rise
SER2915L-152KL	1.5	1.50	1.65	60	100	>100	>100	20	30
SER2915H-222KL	2.2	1.86	2.05	40	100	>100	>100	20	30
SER2915L-222KL	2.2	1.50	1.65	50	82.0	84.0	84.8	20	30
SER2918H-332KL	3.3	2.60	2.86	40	91.0	92.5	93.6	20	28
SER2915H-332KL	3.3	1.86	2.05	30	62.0	66.9	68.4	20	30
SER2915L-332KL	3.3	1.50	1.65	40	48.0	54.0	57.0	20	30
SER2918H-472KL	4.7	2.60	2.86	30	59.0	61.2	62.4	20	28
SER2915H-472KL	4.7	1.86	2.05	25	42.0	48.0	50.1	20	30
SER2915L-472KL	4.7	1.50	1.65	30	33.0	36.9	39.0	20	30
SER2918H-682KL	6.8	2.60	2.86	25	42.0	45.0	45.9	20	28
SER2915H-682KL	6.8	1.86	2.05	20	30.0	34.5	36.2	20	30
SER2915L-682KL	6.8	1.50	1.65	25	22.0	26.0	27.8	20	30
SER2918H-103KL	10	2.60	2.86	20	28.0	31.2	32.1	20	28
SER2915H-103KL	10	1.86	2.05	15	18.0	21.5	23.4	20	30
SER2915L-103KL	10	1.50	1.65	20	13.0	16.2	17.6	20	30
SER2918H-153KL	15	2.60	2.86	16	18.0	21.2	21.9	20	28
SER2915H-153KL	15	1.86	2.05	12	11.5	14.0	15.2	20	30
SER2915L-153KL	15	1.50	1.65	15	7.5	9.8	11.0	20	30
SER2918H-223KL	22	2.60	2.86	15	12.0	14.0	15.0	20	28
SER2915H-223KL	22	1.86	2.05	10	7.0	8.6	9.6	20	30
SER2915L-223KL	22	1.50	1.65	10	4.5	6.0	6.8	20	30
SER2918H-333KL	33	2.60	2.86	10	7.0	8.7	9.6	20	28
SER2915H-333KL	33	1.86	2.05	8	4.0	5.1	5.9	20	30
SER2915L-333KL	33	1.50	1.65	7	2.0	2.6	3.3	20	30

Q200  
125°

### AGP4233 High Current



Part number	Inductance ±20% (µH)	DCR (mΩhms)		SRF typ (MHz)	Isat (A)			Irms (A)	
		nom	max		10% drop	20% drop	30% drop	20°C rise	40°C rise
AGP4233-332ME	3.3	0.67	0.75	27.7	92.0	95.0	98.0	34	44
AGP4233-562ME	5.6	0.67	0.75	22.8	63.0	65.0	67.0	34	44
AGP4233-682ME	6.8	2.80	2.95	21.7	92.0	97.8	101.8	24	34
AGP4233-103ME	10	2.80	2.95	18.8	56.0	60.0	63.0	24	34
AGP4233-153ME	15	2.80	2.95	15.2	45.0	47.0	49.0	24	34
AGP4233-223ME	22	2.80	2.95	12.0	32.8	35.4	36.6	24	34
AGP4233-333ME	33	2.80	2.95	10.0	22.5	24.7	25.8	24	34
AGP4233-473ME	47	2.80	2.95	8.5	16.0	17.6	18.6	24	34
AGP4233-683ME	68	2.80	2.95	6.4	10.6	12.2	13.0	24	34
AGP4233-104ME	100	2.80	2.95	5.2	6.88	7.80	8.36	24	34
AGP4233-154ME	150	2.80	2.95	4.2	4.18	4.96	5.40	24	34
AGP4233-224ME	220	10.5	11.5	5.0	6.40	7.20	7.60	12.4	17.5
AGP4233-334ME	330	10.5	11.5	4.1	4.20	4.70	5.00	12.4	17.5
AGP4233-474ME	470	10.5	11.5	3.6	2.60	3.20	3.40	12.4	17.5

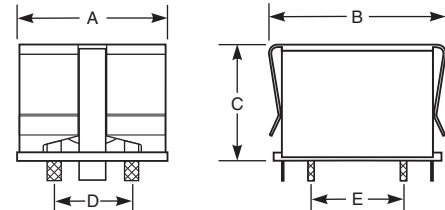


#### Dimensions (inches mm)

Series	A max	B max	C max	D cen	E cen
AGP4233	1.45 36,8	1.70 43,2	1.10 28,0	0.728 18,5	0.826-0.886 21,0-22,5

### VER2923 High Current




Part number	Inductance ±10% (µH)	DCR (mΩhms)		SRF typ (MHz)	Isat (A)			Irms (A)	
		nom	max		10% drop	20% drop	30% drop	20°C rise	40°C rise
VER2923-332KL	3.3	2.3	2.6	40	95.0	104	108	19	26
VER2923-472KL	4.7	2.3	2.6	30	63.0	72.0	76.0	19	26
VER2923-682KL	6.8	2.3	2.6	25	48.0	53.0	56.0	19	26
VER2923-103KL	10	2.3	2.6	20	30.0	34.0	37.0	19	26
VER2923-153KL	15	2.3	2.6	16	20.5	23.0	24.5	19	26
VER2923-223KL	22	2.3	2.6	13	12.2	14.7	16.4	19	26
VER2923-333KL	33	2.3	2.6	10	7.5	9.2	10.3	19	26



#### Dimensions (inches mm)

Series	A max	B max	C max	D cen
VER2923	0.668 16,97	1.08 27,43	0.895 22,74	0.65 16,51
AGP2923	0.668 16,97	1.08 27,43	0.935 23,75	0.65 16,51

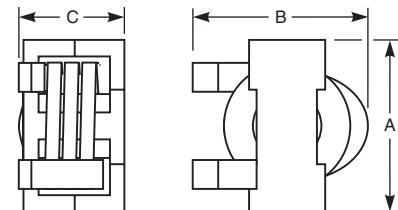

#### Dimensions (inches mm)

Series	A max	B max	C max
SER1590	0.62 15,75	0.64 16,26	0.40 10,16
SER2009	0.79 20,07	0.77 19,56	0.34 8,64
SER2010	0.79 20,07	0.77 19,56	0.37 9,40
SER2011	0.79 20,07	0.77 19,56	0.42 10,67
SER2012	0.79 20,07	0.77 19,56	0.47 11,94
SER2013	0.79 20,07	0.77 19,56	0.51 12,95
SER2014	0.79 20,07	0.77 19,56	0.55 13,97
SER2915	1.1 27,9	1.1 27,9	0.605 15,36
SER2918	1.1 27,9	1.1 27,9	0.700 17,78





Q200  
125

## MVR High Current




Part number	Inductance ±20% (µH)	DCR ±8% (mOhms)	SRF (MHz)	Isat (A) 20% drop	Irms (A)	Height max (mm)
<b>Low core loss</b>						
MVR1251T-251MLC	0.25	0.925	160	35	25	5.1
MVR1251T-361MLC	0.36	0.925	140	24	24	5.1
MVR1251T-561MLC	0.56	0.925	110	13	25	5.1

## MVR High Current



Part number	Inductance ±20% (µH)	DCR ±8% (mOhms)	SRF (MHz)	Isat (A) 20% drop	Irms (A)	Height max (mm)
<b>Soft saturation</b>						
MVR1247C-361MLC	0.36	0.925	120	36	24	4.7
MVR1255C-651MLC	0.65	1.50	115	24	19	5.5
MVR1261C-112MLC	1.10	1.95	95	20	20	6.1
MVR1271C-162MLC	1.65	2.53	55	17	20	7.1
MVR1278C-232MLC	2.30	3.08	50	16	17	7.8

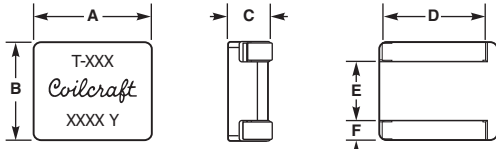


### Dimensions (inches mm)

Series	A max	B max	C max	D	E	F
MVR1247	0.453 11,50	0.384 9,75	0.185 4,70	0.360 9,14	0.223 5,67	0.069 1,75
MVR1251	0.453 11,50	0.384 9,75	0.200 5,10	0.360 9,14	0.223 5,67	0.069 1,75
MVR1255	0.453 11,50	0.384 9,75	0.217 5,50	0.360 9,14	0.223 5,67	0.069 1,75
MVR1261	0.453 11,50	0.384 9,75	0.240 6,10	0.360 9,14	0.223 5,67	0.069 1,75
MVR1271	0.453 11,50	0.384 9,75	0.280 7,10	0.360 9,14	0.223 5,67	0.069 1,75
MVR1278	0.453 11,50	0.384 9,75	0.307 7,80	0.360 9,14	0.223 5,67	0.069 1,75

## DS1608B Backlight




Part number	Inductance ±20% (mH)	DCR max (Ohms)	Insulation core-winding (MOhms)	SRF typ (MHz)	Irms (mA)
DS1608B-104MLC	0.10	0.95	>10	12	220
DS1608B-154MLC	0.15	1.4	>10	10	200
DS1608B-224MLC	0.22	1.7	>10	8	180
DS1608B-334MLC	0.33	2.2	>10	6	160
DS1608B-474MLC	0.47	3.8	>10	5	140
DS1608B-684MLC	0.68	4.9	>10	4	120
DS1608B-105MLC	1.0	9	>10	2	100
DS1608B-155MLC	1.5	11	>10	1	80
DS1608B-225MLC	2.2	19	>10	1	50
DS1608B-335MLC	3.3	24	>10	1	40
DS1608B-475MLC	4.7	30	>10	1	30
DS1608B-685MLC	6.8	56	>10	0.9	20
DS1608B-106MLC	10	74	>10	0.8	10




### Dimensions (inches mm)

Series	A max	B max	C max	D ref	E	F	G
DS1608B	0.175 4,45	0.260 6,60	0.115 2,92	0.160 4,06	0.050 1,27	0.170 4,32	0.040 1,02

## SPT Toroid

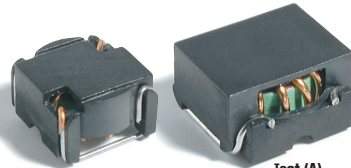

Part number	Inductance ±20% (µH)	DCR max (mOhms)	SRF typ (MHz)	Isat (A)			Body size
				10% drop	20% drop	30% drop	
<b>Standard series</b>							
SPT20L-112MLD	1.1	16.0	130	3.2	4.8	6.7	1
SPT38L-382MLD	3.8	9.3	61	4.0	6.1	8.2	3
SPT30L-522MLD	5.2	24.2	47	2.8	4.2	5.8	2
SPT20L-702MLD	7.0	95.0	37	1.2	1.8	2.5	1
SPT38L-752MLD	7.5	22.8	50	2.7	4.2	5.8	3
SPT44L-792MLD	7.9	16.2	26	3.5	5.4	7.3	4
SPT30L-123MLD	12	54.7	23.9	1.9	2.8	3.7	2
SPT44L-143MLD	14	23.6	15.6	2.8	4.1	5.7	4
SPT50L-163MLD	16	19.7	14.3	2.8	4.2	5.8	5
SPT38L-223MLD	22	63	18.1	1.5	2.3	3.1	3
SPT20L-233MLD	23	320	13.5	0.6	1.0	1.3	1
SPT50L-263MLD	26	32	11.2	2.3	3.4	4.6	5
SPT30L-353MLD	35	166	11.0	1.1	1.6	2.2	2
SPT44L-413MLD	41	85	8.30	1.6	2.3	3.1	4
SPT38L-733MLD	73	290	10.8	0.81	1.3	1.7	3
SPT50L-733MLD	73	133	4.56	1.4	2.0	2.7	5
SPT30L-174MLD	170	640	3.84	0.44	0.68	0.95	2
SPT38L-294MLD	290	657	2.87	0.41	0.64	0.90	3
SPT50L-564MLD	560	550	1.54	0.37	0.59	0.81	5
SPT38L-674MLD	670	1200	1.38	0.26	0.40	0.55	3
SPT44L-115MLD	1100	1908	1.35	0.25	0.41	0.57	4
SPT50L-205MLD	2000	1932	1.35	0.18	0.29	0.41	5
<b>High current series</b>							
SPT44H-282MLD	2.8	4.6	74	5.8	8.8	12.2	6
SPT44H-422MLD	4.2	6.6	61	5.0	7.8	10.9	6
SPT50H-652MLD	6.5	7.2	27.3	4.6	6.7	9.1	7
SPT50H-842MLD	8.4	8.5	22.8	4.3	6.4	8.5	7
SPT68H-113MLD	11	8.2	25.9	4.8	7.2	9.9	8
SPT68H-183MLD	18	12.5	12.0	3.9	5.7	7.7	8

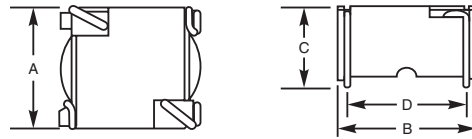

### Dimensions (inches mm)

Body Size	A max	B max	C max	D cen
1	0.34 8,64	0.34 8,64	0.28 7,00	0.26 6,60
2	0.44 11,05	0.44 11,18	0.37 9,50	0.35 8,89
3	0.56 14,22	0.56 14,35	0.37 9,50	0.45 11,43
4	0.59 14,99	0.61 15,62	0.41 10,50	0.50 12,70
5	0.67 17,02	0.70 17,78	0.41 10,50	0.58 14,73
6	0.66 16,89	0.66 16,89	0.41 10,50	0.56 14,22
7	0.74 18,80	0.74 18,80	0.41 10,50	0.63 16,00
8	0.94 23,88	0.94 23,88	0.41 10,50	0.82 20,83








# SD54



Part number	Inductance (µH)	DCR (Ohms)		SRF typ (MHz)	Isat (A)			I <sub>rms</sub> (A)	
		nom	max		10% drop	20% drop	30% drop	20°C rise	40°C rise
SD54-103MLC	10±20%	0.072	0.079	28	2.0	2.3	2.4	1.7	2.3
SD54-123MLC	12±20%	0.080	0.088	26	1.8	2.0	2.2	1.6	2.2
SD54-153MLC	15±20%	0.094	0.103	23	1.5	1.8	1.9	1.5	2.1
SD54-183MLC	18±20%	0.103	0.113	21	1.4	1.6	1.8	1.4	2.0
SD54-223MLC	22±20%	0.119	0.130	19	1.3	1.5	1.6	1.3	1.8
SD54-273MLC	27±20%	0.134	0.147	18	1.2	1.4	1.4	1.2	1.7
SD54-333MLC	33±20%	0.150	0.165	16	1.1	1.2	1.3	1.2	1.6
SD54-393MLC	39±20%	0.195	0.214	13	1.0	1.1	1.2	1.0	1.4
SD54-473MLC	47±20%	0.222	0.244	12	0.92	1.0	1.1	0.97	1.3
SD54-563KLC	56±10%	0.251	0.276	11	0.83	0.96	1.0	0.92	1.3
SD54-683KLC	68±10%	0.335	0.368	9.3	0.76	0.88	0.95	0.80	1.1
SD54-823KLC	82±10%	0.379	0.416	8.4	0.69	0.80	0.85	0.74	1.1
SD54-104KLC	100±10%	0.503	0.553	7.4	0.62	0.72	0.77	0.64	0.88
SD54-124KLC	120±10%	0.579	0.636	7.0	0.56	0.66	0.71	0.58	0.80
SD54-154KLC	150±10%	0.654	0.719	6.3	0.51	0.60	0.64	0.57	0.77
SD54-184KLC	180±10%	0.874	0.961	5.5	0.46	0.53	0.57	0.49	0.67
SD54-224KLC	220±10%	0.996	1.095	5.0	0.43	0.50	0.54	0.47	0.66



### Dimensions (inches mm)

Series	A max	B max	C max	D	E
SD43	0.185 4,7	0.165 4,2	0.136 3,45	0.063 1,60	0.051 1,30
SD54	0.236 6,0	0.222 5,63	0.197 5,0	0.090 2,29	0.105 2,67

# D03316P



Part number	Inductance (µH)	Percent tolerance*	DCR max (Ohms)	SRF typ (MHz)	Isat (A) 10% drop	I <sub>rms</sub> (A)
D03316P-102MLD	1.0	<b>20</b>	0.009	100	9.0	6.8
D03316P-152MLD	1.5	<b>20</b>	0.010	90	8.0	6.4
D03316P-222_LD	2.2	<b>20,10</b>	0.012	80	7.0	6.1
D03316P-332_LD	3.3	<b>20,10</b>	0.015	65	6.4	5.4
D03316P-472_LD	4.7	<b>20,10</b>	0.018	45	5.4	4.8
D03316P-682_LD	6.8	<b>20,10</b>	0.027	38	4.6	4.4
D03316P-103_LD	10	<b>20,10</b>	0.038	30	3.8	3.9
D03316P-153_LD	15	<b>20,10</b>	0.046	27	3.0	3.1
D03316P-223_LD	22	<b>20,10</b>	0.085	19	2.6	2.7
D03316P-333_LD	33	<b>20,10</b>	0.10	15	2.0	2.1
D03316P-473_LD	47	<b>20,10</b>	0.14	12	1.6	1.8
D03316P-683_LD	68	<b>20,10</b>	0.20	10	1.4	1.5
D03316P-104_LD	100	<b>20,10</b>	0.28	9	1.2	1.3
D03316P-154_LD	150	<b>20,10</b>	0.40	6	1.0	1.0
D03316P-224_LD	220	<b>20,10</b>	0.61	5	0.8	0.80
D03316P-334_LD	330	<b>20,10</b>	1.02	4.5	0.60	0.60
D03316P-474_LD	470	<b>20,10</b>	1.27	3.5	0.50	0.50
D03316P-684_LD	680	<b>20,10</b>	2.02	2.5	0.40	0.40
D03316P-105_LD	1000	<b>20,10</b>	3.00	2.0	0.30	0.30
D03316P-155_LD	1500	<b>20,10</b>	4.49	1.7	0.29	0.27
D03316P-335_LD	3300	<b>20,10</b>	8.97	1.1	0.19	0.17



# D03316T High Temp




Part number	Inductance (µH)	Percent tolerance*	DCR max (Ohms)	SRF typ (MHz)	Isat (A) 10% drop	I <sub>rms</sub> (A)
D03316T-331MLD	0.33	<b>20</b>	0.002	200	20	16
D03316T-681MLD	0.68	<b>20</b>	0.005	200	13	12
D03316T-102MLD	1.0	<b>20</b>	0.006	100	11	10
D03316T-152MLD	1.5	<b>20</b>	0.008	90	9.0	9.0
D03316T-222_LD	2.2	<b>20,10</b>	0.011	90	7.8	7.4
D03316T-272_LD	2.7	<b>20,10</b>	0.012	65	7.0	6.6
D03316T-332_LD	3.3	<b>20,10</b>	0.014	60	6.4	5.9
D03316T-392_LD	3.9	<b>20,10</b>	0.015	50	5.9	5.3
D03316T-472_LD	4.7	<b>20,10</b>	0.018	50	5.4	4.8
D03316T-562_LD	5.6	<b>20,10</b>	0.021	45	4.7	4.65
D03316T-682_LD	6.8	<b>20,10</b>	0.024	43	4.4	4.40
D03316T-822_LD	8.2	<b>20,10</b>	0.032	34	4.0	4.15
D03316T-103_LD	10	<b>20,10</b>	0.034	31	3.9	3.90
D03316T-123_LD	12	<b>20,10</b>	0.036	27	3.4	3.50
D03316T-153_LD	15	<b>20,10</b>	0.045	25	3.1	3.10
D03316T-183_LD	18	<b>20,10</b>	0.050	22	2.8	2.90
D03316T-223_LD	22	<b>20,10</b>	0.070	18	2.5	2.70
D03316T-273_LD	27	<b>20,10</b>	0.085	18	2.3	2.30
D03316T-333_LD	33	<b>20,10</b>	0.100	17	2.0	2.10
D03316T-393_LD	39	<b>20,10</b>	0.120	15	1.8	1.95
D03316T-473_LD	47	<b>20,10</b>	0.150	14	1.65	1.80
D03316T-563_LD	56	<b>20,10</b>	0.165	12	1.45	1.65
D03316T-683_LD	68	<b>20,10</b>	0.220	11	1.40	1.50
D03316T-823_LD	82	<b>20,10</b>	0.250	10	1.30	1.40
D03316T-104_LD	100	<b>20,10</b>	0.280	9.0	1.20	1.30
D03316T-124_LD	120	<b>20,10</b>	0.400	8.0	1.00	1.00
D03316T-154_LD	150	<b>20,10</b>	0.460	6.0	0.90	0.90
D03316T-184_LD	180	<b>20,10</b>	0.520	6.0	0.85	0.85
D03316T-224_LD	220	<b>20,10</b>	0.700	5.0	0.80	0.80
D03316T-274_LD	270	<b>20,10</b>	0.800	5.0	0.75	0.70
D03316T-334_LD	330	<b>20,10</b>	1.07	4.5	0.60	0.60
D03316T-394_LD	390	<b>20,10</b>	1.14	4.0	0.62	0.55
D03316T-474_LD	470	<b>20,10</b>	1.27	3.5	0.50	0.50

# D03308P Low Profile



Part number	Inductance (µH)	Percent tolerance*	DCR max (Ohms)	SRF typ (MHz)	Isat (A) 10% drop	I <sub>rms</sub> (A)
D03308P-472_LD	4.7	<b>20,10</b>	0.036	50	4.2	3.2
D03308P-682_LD	6.8	<b>20,10</b>	0.060	47	3.9	2.6
D03308P-103_LD	10	<b>20,10</b>	0.085	35	2.7	2.3
D03308P-153_LD	15	<b>20,10</b>	0.12	33	2.3	1.9
D03308P-223_LD	22	<b>20,10</b>	0.18	25	1.8	1.5
D03308P-333_LD	33	<b>20,10</b>	0.25	19	1.6	1.2
D03308P-473_LD	47	<b>20,10</b>	0.32	14	1.3	1.0
D03308P-683_LD	68	<b>20,10</b>	0.54	12	1.1	0.90
D03308P-104_LD	100	<b>20,10</b>	0.69	10	0.87	0.73
D03308P-154_LD	150	<b>20,10</b>	0.94	8.0	0.74	0.62
D03308P-224_LD	220	<b>20,10</b>	1.60	6.0	0.56	0.51
D03308P-334_LD	330	<b>20,10</b>	2.15	5.0	0.50	0.40
D03308P-474_LD	470	<b>20,10</b>	3.30	4.0	0.40	0.33
D03308P-684_LD	680	<b>20,10</b>	4.40	3.0	0.33	0.28
D03308P-105_LD	1000	<b>20,10</b>	7.00	2.5	0.29	0.23

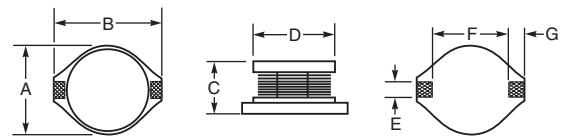

### Dimensions (inches mm)

Series	A max	B max	C	D	E	F	G
D01608C	0.175 4,45	0.260 6,60	0.115 2,92	0.155 3,94	0.050 1,27	0.170 4,32	0.040 1,02
D03308P	0.370 9,40	0.510 12,95	0.118 3,00	0.330 8,38	0.100 2,54	0.300 7,62	0.100 2,54
D03316T	0.390 9,91	0.510 12,95	0.250 6,35	0.330 8,38	0.160 4,06	0.400 10,16	0.060 1,52
D03316P	0.370 9,40	0.510 12,95	0.205 5,21	0.330 8,38	0.100 2,54	0.300 7,62	0.100 2,54

\* Bold numbers indicate tolerances carried in stock. When ordering, please replace underscore in part number with the proper tolerance code: K = 10%, M = 20%. (e.g. D03308P-105KLD for a 10% tolerance part.)








Q200  
85°

## RFB0810




Part number	Inductance ±10%	DCR max (Ohms)	SRF typ (MHz)	Isat (A) 10% drop	Irms (A)	
					20°C rise	40°C rise
RFB0810-100L	10µH	0.030	22	4.20	4.00	5.30
RFB0810-120L	12µH	0.035	20	3.90	3.75	5.10
RFB0810-150L	15µH	0.040	17	3.60	3.52	4.80
RFB0810-180L	18µH	0.040	15	3.30	3.30	4.50
RFB0810-220L	22µH	0.050	12	2.90	3.20	4.20
RFB0810-270L	27µH	0.055	12	2.60	2.87	3.90

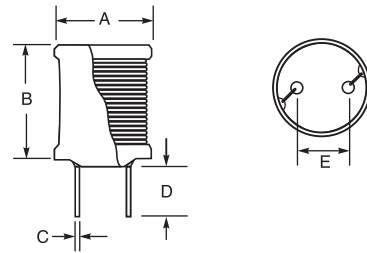

Q200  
85°

## RFB1010



Part number	Inductance ±10%	DCR max (Ohms)	SRF typ (MHz)	Isat (A) 10% drop	Irms (A)	
					20°C rise	40°C rise
RFB1010-120L	12µH	0.025	20	5.60	4.00	5.70
RFB1010-150L	15µH	0.028	19	5.00	3.75	5.40
RFB1010-180L	18µH	0.030	16	4.60	3.50	5.00
RFB1010-220L	22µH	0.042	15	4.10	3.30	4.70
RFB1010-270L	27µH	0.046	12	3.70	3.00	4.40
RFB1010-330L	33µH	0.055	11	3.40	2.80	4.10
RFB1010-390L	39µH	0.075	10.3	3.10	2.60	3.80
RFB1010-470L	47µH	0.082	9.5	2.80	2.40	3.50
RFB1010-560L	56µH	0.090	8.6	2.60	2.20	3.20

### Dimensions (inches mm)

Series	A max	B max	C	D	E
DR0608	0.30 7,50	0.39 10,0	0.024 0,60	0.157 4,0	0.138 3,5
DR0810	0.41 10,5	0.47 12,0	0.024 0,60	0.157 4,0	0.197 5,0
RFB0807	0.35 8,80	0.30 7,50	0.024 0,60	0.157 4,0	0.197 5,0
RFB0810	0.37 9,50	0.45 11,5	0.024 0,60	0.157 4,0	0.197 5,0
RFB1010	0.43 11,0	0.45 11,5	0.031 0,80	0.157 4,0	0.236 6,0
RFC0810	0.37 9,50	0.45 11,5	0.024 0,60	0.197 5,0	0.197 5,0
RFC1010	0.43 11,0	0.45 11,5	0.031 0,80	0.197 5,0	0.236 6,0



# Dual Inductors for Class-D

Coilcraft offers a unique selection of dual inductors that significantly improve performance and reduce board area with a compact single shielded package. Good linearity and ultra low total losses minimize total harmonic distortion plus noise (THD+N). With no crosstalk between windings, their high efficiency makes them ideal for use in handheld audio devices, portable docking stations, high-end TV soundbars, active speakers and subwoofers and automotive stereo audio systems.




Q200  
125°

## UA801x

NEW!

Part number	Output (W)	Inductance ±10% (µH)	DCR max (mOhms)	SRF typ (MHz)	Isat (A)			Irms (A)	
					10% drop	20% drop	30% drop	20°C rise	40°C rise
UA8013-ALD	100	7.0	6.6	40	12.0	12.5	13.2	6.5	9.0
UA8014-ALD	100	10.0	6.6	28	8.7	9.1	9.4	6.5	9.0



Q200  
125°

## RA7231

Part number	Output (W)	Inductance ±10% (µH)	DCR max (mOhms)	SRF typ (MHz)	Isat (A)			Irms (A)	
					10% drop	20% drop	30% drop	20°C rise	40°C rise
RA7231-ALD	40	5.0	6.0	34	15.5	16.6	17.6	7.6	10.6




Q200  
125°





## HA4158, JA4575, GA3416

Part number	Output (W)	Inductance ±10% (µH)	DCR max (mOhms)	SRF typ (MHz)	Isat (A)			Irms (A)	
					10% drop	20% drop	30% drop	20°C rise	40°C rise
HA4158-ELD	68	10.0	13.0	21.5	6.0	6.7	7.1	4.0	6.0
JA4575-BLD	68	10.0	13.0	21.5	6.0	6.7	7.1	4.0	6.0
GA3416-CLD	60	10.0	21.0	23.6	8.6	8.7	8.8	3.0	4.3

### UA801x, HA4158, GA3416, RA7231



### JA4575



### Dimensions (inches mm)

Series	A max	B max	C	D
UA8013	0.610 15,50	0.551 14,00	0.630 16,00	
UA8014	0.610 15,50	0.551 14,00	0.630 16,00	
HA4158	0.466 11,84	0.423 10,75	0.419 10,65	
JA4575	0.466 11,84	0.423 10,75	0.390 9,91	0.110 2,80
GA3416	0.610 15,50	0.535 13,59	0.520 13,21	
RA7231	0.610 15,50	0.551 14,00	0.630 16,00	









# Step-Up Transformers


LPR Family shielded coupled inductors are low profile miniature parts. Their excellent coupling coefficient ( $k \geq 0.95$ ) makes them ideal for use as flyback transformers in DC-DC converters or as coupled inductors in buck regulators to provide multiple outputs. The wide selection of turns ratios makes them suitable for a variety of voltage step-up and step-down applications. They can also be used in autotransformer applications. Their high Isat and low DCR ratings provide high efficiency and excellent current handling in a rugged, low cost design. Custom inductance values and turns ratios may be available upon request.

## LPR4012

Part number	Primary (L1) Inductance $\pm 20\%$ ( $\mu\text{H}$ )	Turns ratio	DCR max (Ohms)		SRF typ (kHz)	Isat (A)			Irms (A)	
			L1	L2		10% drop	20% drop	30% drop	20°C rise	40°C rise
LPR4012-202AMRC	2.0	1:1.5	0.240	0.325	61.5	1.70	1.73	1.74	1.10	1.45
LPR4012-202BMRC	2.0	1:2	0.240	0.480	49.4	1.70	1.73	1.74	1.10	1.45
LPR4012-202DMRC	2.0	1:3	0.240	1.15	31.0	1.70	1.73	1.74	1.10	1.45
LPR4012-202LMRC	2.0	1:10	0.240	11.62	7.43	1.70	1.73	1.74	1.10	1.45
LPR4012-103BMRC	10.0	1:2	0.600	1.55	19.5	0.62	0.64	0.65	0.52	0.70
LPR4012-103DMRC	10.0	1:3	0.600	3.71	12.8	0.62	0.64	0.65	0.52	0.70
LPR4012-223BMRC	22.0	1:2	1.16	3.65	11.2	0.43	0.45	0.46	0.43	0.57
LPR4012-223DMRC	22.0	1:3	1.16	7.08	8.00	0.43	0.45	0.46	0.43	0.57

## LPR6235

Part number	Primary (L1) Inductance $\pm 20\%$ ( $\mu\text{H}$ )	Turns ratio	DCR max (Ohms)		SRF typ (kHz)	Isat (A) 10% drop
			L1	L2		
LPR6235-253LMRC	25	1:10	0.74	13.7	1300	1.3
LPR6235-253PMRC	25	1:20	0.20	72	580	0.7
LPR6235-123QMRC	12.5	1:50	0.085	200	360	0.9
LPR6235-752RMRC	7.5	1:90	0.085	285	257	1.6
LPR6235-752SMRC	7.5	1:100	0.085	340	230	1.6

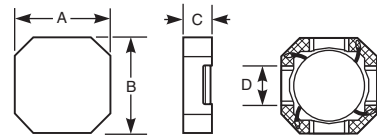

### Dimensions (inches mm)

Series	A max	B max	C	D
LPR4012	0.158 4,02	0.158 4,02	0.0473 1,2	0.060 1,52
LPR6235	0.239 6,08	0.239 6,08	0.138 3,50	0.060 1,52




# Planar Transformers

These high efficiency planar transformers offer excellent DCR and very low leakage inductance in a low-profile package. The POE120PL is rated for 120 Watts, the PL160 Series is rated for 160 Watts and the PL300 Series is rated to 300 Watts. The POE120PL is designed for active clamp forward topology, and the PL160 and PL300 can be used in forward, push-pull and full-bridge/half-bridge topologies. An auxiliary winding is included in the POE120PL and is optional on the PL160 and PL300.


### Dimensions (inches mm)

Series	A max	B max	C max
PL160	0.92 23,37	0.82 20,83	0.352-0.375 8,94-9,53
PL300	1.16 29,46	1.05 26,67	0.410-0.475 10,4-12,1
POE120PL	0.92 23,37	0.82 20,83	0.352-0.375 8,94-9,53

To view our full portfolio of planar transformers, visit [www.coilcraft.com/prod\\_planar.cfm](http://www.coilcraft.com/prod_planar.cfm).



## PL300/PL160/POE120PL



Part number	Turns			Primary inductance min ( $\mu\text{H}$ )	Leakage inductance max ( $\mu\text{H}$ )	DCR max (mOhms)			Volt-time product typ (V $\mu\text{sec}$ )
	Pri	Sec	Aux			Pri	Sec	Aux	
PL300-100L	4	4	Opt.	287	0.25	7.2	4.2	—	206
PL300-101L	5	4	Opt.	448	0.35	9.0	4.2	—	258
PL300-102L	6	4	Opt.	635	0.50	10.6	4.2	—	310
PL300-103L	7	4	Opt.	864	0.75	12.3	4.2	—	361
PL300-104L	8	4	Opt.	1075	1.0	13.8	4.2	—	413
PL160-100L	4	4	Opt.	246	0.35	14.7	6.8	—	150
PL160-101L	4	5	Opt.	312	0.40	14.7	6.8	—	168
PL160-102L	5	5	Opt.	378	0.45	18.5	6.8	—	187
PL160-103L	5	6	Opt.	449	0.55	18.5	6.8	—	206
PL160-104L	6	6	Opt.	534	0.55	21.5	6.8	—	224
POE120PL-33L	12	2	7	40	0.70	27.6	1.26	270	150
POE120PL-50L	8	2	5	40	0.31	18.9	1.26	123	100
POE120PL-12L	8	4	4	40	0.37	18.9	6.80	58.5	100
POE120PL-24L	8	8	4	40	0.39	18.9	13.6	58.5	100



# Miniature Flyback Transformers

With 1500 Vdc (1000 Vrms) isolation and a small package size, the LPD5030V and LPD8035V Series are ideal for use in high density isolated circuit applications. These miniature transformers provide tight coupling, high inductance and excellent current handling. Functional Safety Listed by UL. Functional insulation class for TNV-1 to SELV applications. Functional insulation with a maximum 60 Vdc, 42.4 V peak input/output voltages with working voltages up to 210 Vdc. (Report #E219588-A6)


## LPD5030V

Part number	Inductance at 0 A $\pm 20\%$ ( $\mu\text{H}$ )	Inductance at Ipk $\pm 20\%$ ( $\mu\text{H}$ )	DCR max (Ohms)	Leakage inductance typ ( $\mu\text{H}$ )	Isolation (Vrms)	Turns ratio	Ipk (A)
LPD5030V-472MRC	4.7	3.3	0.322	0.109	1000	1:1	1.90
LPD5030V-682MRC	6.8	4.7	0.395	0.109	1000	1:1	1.55
LPD5030V-103MRC	10	7.0	0.490	0.130	1000	1:1	1.30
LPD5030V-333MRC	33	23	0.895	0.195	1000	1:1	0.67
LPD5030V-154MRC	150	105	3.82	0.456	1000	1:1	0.31
LPD5030V-224MRC	220	154	5.25	0.541	1000	1:1	0.24


## LPD8035V

Part number	Inductance at 0 A $\pm 20\%$ ( $\mu\text{H}$ )	Inductance at Ipk $\pm 20\%$ ( $\mu\text{H}$ )	DCR max (Ohms)	Leakage inductance max ( $\mu\text{H}$ )	Isolation (Vrms)	Turns ratio	Ipk (A)
LPD8035V-472MRC	4.7	3.3	0.140	0.150	1500	1:1	2.7
LPD8035V-103MRC	10	7.0	0.185	0.250	1500	1:1	2.0
LPD8035V-333MRC	33	23.1	0.660	0.350	1500	1:1	1.0
LPD8035V-473MRC	47	32.9	0.696	0.410	1500	1:1	0.54
LPD8035V-104MRC	100	70.0	1.45	0.565	1500	1:1	0.39
LPD8035V-154MRC	150	105	1.90	0.820	1500	1:1	0.31

### LPD5030V



### LPD8035V



### Dimensions (inches mm)

Series	A max	B max	C max	D
LPD5030V	0.189 4,80	0.189 4,80	0.118 3,0	0.060 1,52
LPD8035V	0.255 6,48	0.315 8,0	0.138 3,50	0.063 1,60




# Flyback Transformers

Many Coilcraft flyback transformers have been specified and approved by IC manufacturers to work with their chipsets. These transformers are available with a variety of turns ratios to meet many different requirements. PoE transform-

ers are designed for IEEE 802.3af-compliant applications and IEEE 802.3at for high power PoE applications. Capacitor charging transformers provide output up to 500 V. Custom transformers are also available.

Part number	Power (W)	Output	Aux / bias	Nominal freq. (kHz)	Turns ratio		L at 0 A (µH)	Dim dwg	Designed for
					pri : sec	pri : aux			
<b>Telecom input (36 – 72 Vdc)</b>									
B0226-ELD	2.0	12 V, 167 mA 12 V, 3 mA	—	1000	1 : 0.36 1 : 0.36	—	120	2A	ON Semi NCP1030
POE30P-33LD	3.0	3.3 V, 0.91 A	12 V, 20 mA	250	1 : 0.19	1 : 0.70	310	4	PoE
C1590-ALD	3.0	3.3 V, 0.91 A	12 V, 20 mA	250	1 : 0.19	1 : 0.70	310	4	TI LM5070
POE30P-50LD	3.0	5.0 V, 0.6 A	12 V, 20 mA	250	1 : 0.28	1 : 0.70	310	4	PoE
C1591-ALD	3.0	5.0 V, 0.6 A	12 V, 20 mA	250	1 : 0.28	1 : 0.70	310	4	TI LM5070
POE30P-12LD	3.0	12 V, 0.25 A	12 V, 20 mA	250	1 : 0.70	1 : 0.70	310	4	PoE
C1592-ALD	3.0	12 V, 0.25 A	12 V, 20 mA	250	1 : 0.70	1 : 0.70	310	4	TI LM5070
POE60F-18LD	6.0	1.8 V, 3.3 A	12 V, 20 mA	250	1 : 0.07	1 : 0.36	75	9	PoE
POE60C-18LD	6.0	1.8 V, 3.3 A	12 V, 20 mA	250	1 : 0.063	1 : 0.344	167	6	PoE
POE60D-18LD	6.0	1.8 V, 3.3 A	12 V, 20 mA	250	1 : 0.063	1 : 0.344	75	6	PoE
POE60F-25LD	6.0	2.5 V, 2.4 A	12 V, 20 mA	250	1 : 0.08	1 : 0.33	55	9	PoE
POE60C-25LD	6.0	2.5 V, 2.4 A	12 V, 20 mA	250	1 : 0.083	1 : 0.333	177	6	PoE
POE60D-25LD	6.0	2.5 V, 2.4 A	12 V, 20 mA	250	1 : 0.083	1 : 0.333	80	6	PoE
POE60F-33LD	6.0	3.3 V, 1.8 A	12 V, 20 mA	250	1 : 0.11	1 : 0.36	65	9	PoE
POE60C-33LD	6.0	3.3 V, 1.8 A	12 V, 20 mA	250	1 : 0.100	1 : 0.333	184	6	PoE
POE60D-33LD	6.0	3.3 V, 1.8 A	12 V, 20 mA	250	1 : 0.100	1 : 0.333	85	6	PoE
POE60F-50LD	6.0	5.0 V, 1.2 A	12 V, 20 mA	250	1 : 0.15	1 : 0.35	60	9	PoE
POE60C-50LD	6.0	5.0 V, 1.2 A	12 V, 20 mA	250	1 : 0.143	1 : 0.343	193	6	PoE
POE60D-50LD	6.0	5.0 V, 1.2 A	12 V, 20 mA	250	1 : 0.143	1 : 0.357	90	6	PoE
POE60F-12LD	6.0	12 V, 0.5 A	12 V, 20 mA	250	1 : 0.35	1 : 0.35	55	9	PoE
POE60C-12LD	6.0	12.0 V, 0.5 A	12 V, 20 mA	250	1 : 0.333	1 : 0.333	204	6	PoE
POE60D-12LD	6.0	12.0 V, 0.5 A	12 V, 20 mA	250	1 : 0.333	1 : 0.333	95	6	PoE
A0009-ALD	6.6	3.3 V, 3 A	24 V	100	1 : 0.333	1 : 1	100	13	TI LM5000
POE70P-33LD	7.0	3.3 V, 2.12 A	12 V, 20 mA	250	1 : 0.19	1 : 0.667	155	7	PoE
C1587-ALD	7.0	3.3 V, 2.12 A	12 V, 20 mA	10	1 : 0.19	1 : 0.667	155	7	TI LM5070
POE70P-50LD	7.0	5.0 V, 1.4 A	12 V, 20 mA	250	1 : 0.262	1 : 0.667	155	7	PoE
C1588-ALD	7.0	5.0 V, 1.4 A	12 V, 20 mA	10	1 : 0.262	1 : 0.667	155	7	TI LM5070
POE70P-12LD	7.0	12 V, 0.6 A	12 V, 20 mA	250	1 : 0.667	1 : 0.667	155	7	PoE
C1589-ALD	7.0	12 V, 0.6 A	12 V, 20 mA	10	1 : 0.667	1 : 0.667	155	7	TI LM5070
D1766-ALD	10	3.3 V, 5 A 2.5 V, 1.5 A 1.8 V, 2.5 A	—	200	1 : 0.104 1 : 0.042 1 : 0.042	—	221	14	Linear LTC4267
FA2671-ALD	10	3.3 V, 3 A	—	350	1 : 0.333	—	40	7	Silicon Labs Si3402
C1048-ALD	10	5.0 V, 2 A	15 V, 0.2 A	250	1 : 0.12	1 : 0.47	94	9	Linear LT1725
FA2672-ALD	10	5.0 V, 2 A	—	350	1 : 0.25	—	40	7	Silicon Labs Si3402
FA2732-ALD	10	12 V, 0.83 A	—	350	1 : 1	—	40	7	Silicon Labs Si3402
FA2519-ALD	11	3.3 V, 3.3 A	10 V, 20 mA	250	1 : 0.20	1 : 0.60	55	8	TI LM5071, LM5072
POE13F-18LD	13	1.8 V, 7.2 A	12 V, 20 mA	250	1 : 0.07	1 : 0.36	45	9	PoE
POE13F-25LD	13	2.5 V, 5.2 A	12 V, 20 mA	250	1 : 0.08	1 : 0.33	35	9	PoE
POE13F-33LD	13	3.3 V, 3.9 A	12 V, 20 mA	250	1 : 0.11	1 : 0.36	40	9	PoE
POE13P-33LD	13	3.3 V, 4.0 A	12 V, 20 mA	250	1 : 0.166	1 : 0.50	127	8	PoE
POE13F-50LD	13	5.0 V, 2.6 A	12 V, 20 mA	250	1 : 0.15	1 : 0.35	40	9	PoE
POE13P-50LD	13	5.0 V, 2.6 A	12 V, 20 mA	250	1 : 0.25	1 : 0.50	127	8	PoE
DA2362-ALD	13	5.0 V, 2.6 A	12 V, 20 mA	250	1 : 0.25	1 : 0.594	127	8	Freescale MC34670
GA3372-ALD	13	5.0 V, 2.6 A	10 V, 20 mA	250	1 : 0.25	1 : 0.50	102	8	TI LM5015
POE13F-12LD	13	12 V, 1.1 A	12 V, 20 mA	250	1 : 0.35	1 : 0.35	35	9	PoE
POE13P-12LD	13	12 V, 1.08 A	12 V, 20 mA	250	1 : 0.50	1 : 0.50	127	8	PoE
POE13F-19LD	13	19.5 V, 0.67 A	12 V, 20 mA	250	1 : 0.57	1 : 0.35	37	9	PoE
POE13P-19LD	13	19.5 V, 0.67 A	12 V, 20 mA	250	1 : 0.567	1 : 0.50	127	8	PoE
POE13F-24LD	13	24 V, 0.54 A	12 V, 20 mA	250	1 : 0.67	1 : 0.33	37	8	PoE
POE13P-24LD	13	24 V, 0.54 A	12 V, 20 mA	250	1 : 0.667	1 : 0.50	127	8	PoE
B0695-ALD	15	3.3 V, 4.5 A	12 V	10	1 : 0.23	1 : 0.69	110	14	TI LM5020
C1023-ALD	15	3.3 V, 4.5 A	24 V	10	1 : 0.19	1 : 0.69	110	8	TI LM5070
POE300F-33LD	30	3.3 V, 9 A	12 V, 20 mA	250	1 : 0.09	1 : 0.33	42	14	PoE+
POE300F-50LD	30	5.0 V, 6 A	12 V, 20 mA	250	1 : 0.14	1 : 0.33	42	14	PoE+
POE300F-12LD	30	12 V, 2.5 A	12 V, 20 mA	250	1 : 0.33	1 : 0.33	42	14	PoE+








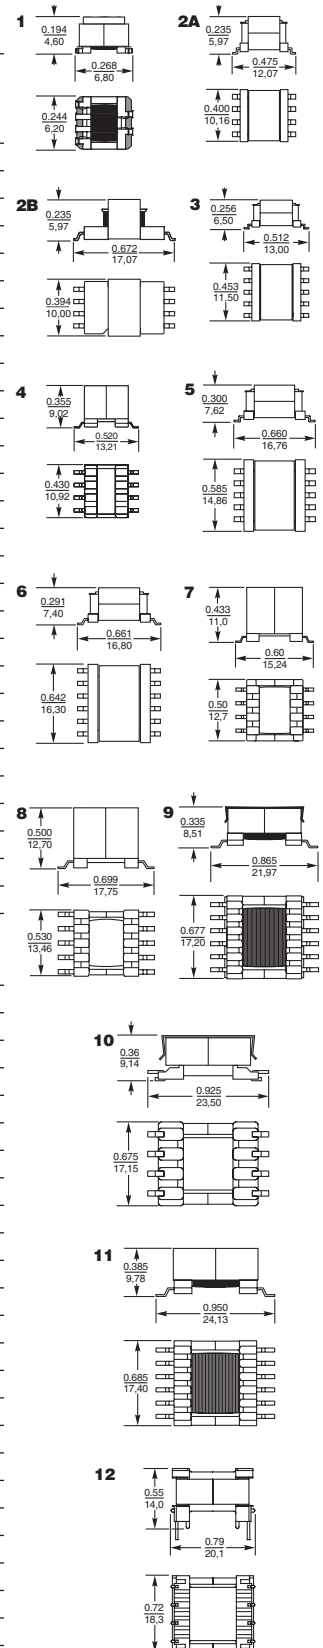


Visit [www.coilcraft.com](http://www.coilcraft.com) for forward-mode, gate-drive, isolation transformers and power factor magnetics.

**Bold** = new product















Part number	Power (W)	Output	Aux / bias	Nominal freq. (kHz)	Turns ratio		L at 0 A (µH)	Dim dwg	Designed for
					pri : sec	pri : aux			
<b>Telecom input (36 – 72 Vdc) (continued)</b>									
A9967-ALD	30	15 V, 2 A	12 V, 20 mA	100	1 : 0.67	1 : 0.33	90	14	Linear LT1725
MA5475-AL	30	15 V, 2 A	12 V, 20 mA	100	1 : 0.24	1 : 0.20	180	14	Maxim MAX17595
POE300F-19LD	30	19.5 V, 1.5 A	12 V, 20 mA	250	1 : 0.56	1 : 0.33	42	14	PoE+
POE300F-24LD	30	24 V, 1.25 A	12 V, 20 mA	250	1 : 0.67	1 : 0.33	42	14	PoE+
<b>Telecom input (36 – 57 Vdc)</b>									
C1453-ALD	5.0	3.3 V, 1.5 A	10 V	1000	1 : 0.166	1 : 0.5	50	3	TI PMP717
DA2062-ALD	6.6	3.3 V, 2 A	14 V	400	1 : 0.1	1 : 0.4	120	5	Power Integrations DPA423G
HA3801-ALD	10	3.3 V, 3 A	10 V, 20 mA	125	1 : 0.154	1 : 0.5	166.5	9	TI TPS23753
HA3802-BLD	10	5.0 V, 2 A	10 V, 20 mA	125	1 : 0.25	1 : 0.444	150	9	TI TPS23753
NA6223-ALD	10	5.0 V, 2 A	10 V, 20 mA	1	1 : 0.167	1 : 0.361	180	8	TI TPS23753A
PA6340-ALD	10	5.0 V, 2 A	10 V, 20 mA	1	1 : 0.167	1 : 0.361	133	8	TI TPS23753
HA3803-BLD	10	12 V, 0.83 A	10 V, 20 mA	125	1 : 0.5	1 : 0.5	166.5	9	TI TPS23753
CX9628-ALD	12	5 V, 2.5 A	2 V, 0.87 mA	100	1 : 0.20	1 : 0.25	43.7	8	MPS MP8007
CX9629-ALD	12	12 V, 1.0 A	2 V, 0.87 mA	100	1 : 0.45	1 : 0.25	42.9	8	MPS MP8007
CX9649-ALD	12	24 V, 0.5 A	2 V, 0.87 mA	100	1 : 0.90	1 : 0.25	45.3	8	MPS MP8007
HA3905-CLD	13	5.0 V, 2.5 A	12 V, 20 mA	250	1 : 0.267	1 : 0.735	27	8	Microsemi UC3844
C1495-ALD	13	3.3 V, 4.0 A	12 V, 20 mA	250	1 : 0.166	1 : 0.50	127	8	TI LM5070
C1585-ALD	13	5.0 V, 2.6 A	12 V, 20 mA	250	1 : 0.25	1 : 0.50	127	8	TI LM5070
C1586-ALD	13	12 V, 1.08 A	12 V, 20 mA	250	1 : 0.50	1 : 0.50	127	8	TI LM5070
FA2805-CLD	15	5.0 V, 3 A	—	350	1 : 0.40	—	40	8	Silicon Labs Si3400/3401
FA2924-ALD	15	3.3 V, 4.5 A	—	350	1 : 0.31	—	40	8	Silicon Labs Si3400/3401
FA2925-ALD	15	12 V, 1.25 A	—	350	1 : 1	—	40	8	Silicon Labs Si3400/3401
FA2706-BLD	20	3.3 V, 6 A	10 V	250	1 : 0.147	1 : 0.235	77.8	11	STMicro PM8800
FA2707-BLD	20	5 V, 4 A	10 V	250	1 : 0.206	1 : 0.235	77.8	11	STMicro PM8800
JA4372-ALD	25	3.3 V, 7.6 A	11.2 V, 20 mA	250	1 : 0.08	1 : 0.28	67.5	14	TI TPS23754
JA4387-ALD	25	12 V, 2.08 A	11.2 V, 20 mA	250	1 : 0.25	1 : 0.25	66	14	TI TPS23754
GA3568-DLD	30	3.3 V, 9.1 A	5 V, 20 mA	300	1 : 0.167	1 : 0.29	60	14	Akros AS1135
<b>TA7818-AL</b>	51	12 V, 4.25 A	13 V, 30 mA	250	1 : 0.5	1 : 0.6	22.4	16	Microsemi PD70211
<b>Telecom extended input (42 – 57 Vdc)</b>									
JA4173-ALD	20	3.3 V, 6 A	10 V, 20 mA	250	1 : 0.156	1 : 0.50	100	8	STMicro PM8803
HA3691-ALD	20	5 V, 4 A	10 V, 20 mA	250	1 : 0.25	1 : 0.469	100	8	STMicro PM8800
<b>Telecom extended input (10 – 57 Vdc)</b>									
HA3809-ALD	30	3.3 V, 9.1 A	5 V, 20 mA	300	1 : 0.176	1 : 0.29	30	14	Akros AS1135
<b>Telecom extended input (14 – 60 Vdc)</b>									
DA2257-ALD	11.6	3.3 V, 2 A 5.0 V, 1 A	10 V, 50 mA	250	1 : 0.167 1 : 0.28	1 : 0.5	35	8	TI LM5071
<b>Telecom extended input (16 – 32 Vdc)</b>									
FA2636-ALD	5.0	5.0 V, 1 A	7.5 V	250	1 : 0.25	1 : 0.38	160	9	TI LM5001
<b>Telecom extended input (18 – 57 Vdc)</b>									
FA2677-ALD	25	3.3 V, 7.5 A	11 V, 20 mA	250	1 : 0.12	1 : 0.41	50	14	TI LM5072
FA2898-ALD	25	5.0 V, 5 A	11 V, 20 mA	250	1 : 0.18	1 : 0.41	50	14	TI LM5072
FA2899-ALD	25	9 V, 2.8 A	11 V, 20 mA	250	1 : 0.35	1 : 0.41	50	14	TI LM5072
FA2900-ALD	25	12 V, 2.1 A	11 V, 20 mA	250	1 : 0.47	1 : 0.41	50	14	TI LM5072
FA2901-ALD	25	15 V, 1.7 A	11 V, 20 mA	250	1 : 0.59	1 : 0.41	50	14	TI LM5072
<b>Telecom extended input (18 – 72 Vdc)</b>									
C1099-ALD	8.3	3.3 V, 2.5 A	14 V	275	1 : 0.13	1 : 0.57	133	9	Maxim MAX5941A
C1154-BLD	9.1	3.3 V, 2 A 2.5 V, 0.6 A	15 V / 5 V	275	1 : 0.10 1 : 0.075	1 : 0.425	255	9	Maxim MAX5941A
C1173-ALD	10	3.3 V, 3 A	10 V / 5.6 V	500	1 : 0.15	1 : 0.5	166.5	9	TI TPS23750
C1174-ALD	10	5.0 V, 2 A	10 V / 7.5 V	500	1 : 0.20	1 : 0.44	150.0	9	TI TPS23750
GA3562-BLD	10	12 V, 0.83 A	10 V / 7.5 V	500	1 : 0.05	1 : 0.5	166.5	9	TI TPS23750
<b>Telecom extended input (24 – 60 Vdc)</b>									
DA2383-ALD	13	3.3 V, 4 A	10 V, 0.05 A	250	1 : 0.16	1 : 0.50	127	8	TI LM5071
<b>2.9 – 32 Vdc input</b>									
TA7608-AL	2.0	5 V, 0.4 A	—	100	1 : 4	—	2.0	2A	Silicon Labs Si88x2x, Si88x4x
TA7618-AL	2.0	5 V, 0.4 A	—	100	1 : 4	—	2.0	2B	Silicon Labs ISOVolt
NA5889-AL	12	12 V, 1 A	—	200	1 : 0.833	—	12	8	TI 55340
<b>3.3 Vdc input</b>									
DA2420-ALD	1.2	12 V, 0.1 A	—	100	1 : 2	—	330	8	ST Micro STE12PS
DA2421-ALD	1.2	12 V, 0.1 A	—	100	1 : 3	—	330	8	ST Micro STE12PS



**Bold** = new product

Part number	Power (W)	Output	Aux / bias	Nominal freq. (kHz)	Turns ratio		L at 0 A (µH)	Dim dwg	Designed for
					pri : sec	pri : aux			
<b>4 – 6 Vdc input</b>									
S6057-AL	4.5	5.0 V / 0.9 A	—	100	1 : 1	—	47	15	TI LM258X (T7)
S6000-AL	4.5	5.0 V / 0.9 A	—	100	1 : 1	—	47	18	TI LM258X (T7)
Q4435-BL	8.0	5.0 V, 1.6 A	—	100	1 : 1	—	22	15	TI LM258X (T1)
Q4434-BL	8.0	5.0 V, 1.6 A	—	100	1 : 1	—	22	18	TI LM258X (T1)
Q4436-BL	8.4	12 V, 0.35 A -12 V, 0.35 A	—	100	1 : 2.5 1 : 2.5	—	22	15	TI LM258X (T2)
Q4337-BL	8.4	12 V, 0.35 A -12 V, 0.35 A	—	100	1 : 2.5 1 : 2.5	—	22	18	TI LM258X (T2)
<b>4.5 – 8.5 Vdc input</b>									
FA2469-ALD	4.0	-48 V, 0.083 A	—	125	1 : 16	—	19	4	STMicro STLC3075
<b>5 – 20 Vdc input</b>									
CX9721-AL	1.25	5 V, 0.25 A	5 V, 2 mA	100	1 : 1	1 : 1	10	2B	TI TPS61046 Boost Converter
<b>5 – 24 Vdc input</b>									
HA3994-AL	4.0	5 V, 3.6 A 15 V, 1.2 A -15 V, 1.2 A	—	100	1 : 0.5 1 : 1.5 1 : 1.5	—	7.5	16	Linear LT3751
<b>6 – 32 Vdc input</b>									
<b>PA6582-AL</b>	32.4	54 V, 0.6 A	10.2 V	150	1 : 5	1 : 1	9	16	TI PMP20588
<b>7 – 24 Vdc input</b>									
<b>UA7902-AL</b>	2	5 V, 0.4 A	—	250	3 : 1	—	25	2B	Silicon Labs DC-DC Converter
<b>TA7788-AL</b>	2.13	15 V, 0.13 A 9 V, 0.02 A	—	250	1 : 1.25 1 : 0.75	—	25	2B	Silicon Labs DC-DC Converter
<b>8 – 18 Vdc input</b>									
NA6264-AL	48	48 V, 1 A	9 V, 20 mA	300	1 : 6	1 : 1.5	2.56	16	TI PMP7899
UA7962-AL	81	54 V, 1.5 A	20 mA	300	1 : 2	1 : 0.5	10	23	TI PMP20058
<b>8.5 – 12 Vdc input</b>									
FA2470-ALD	4.0	-48 V, 0.083 A	—	125	1 : 8	—	19	4	STMicro STLC3075
<b>9 – 20 Vdc input</b>									
IFLY0012LD	4.1	24 V, 0.17 A 72 V, 0.17 A	—	600	1 : 3 1 : 9	—	6.0	10	Intersil ISL6401
<b>10 – 14 Vdc input</b>									
GA3430-BLD	5.0	5.0 V, 1.5 A	5.0 V, 20 mA	250	1 : 0.20	1 : 0.20	25	7	
GA3431-BLD	5.0	3.3 V, 1.5 A	3.3 V, 20 mA	250	1 : 0.14	1 : 0.14	25	7	
<b>12 – 24 Vdc input</b>									
TA7788-AL	2.0	15 V, 0.13 A 9 V, 0.02 A	—	250	1 : 1.25 1 : 0.75	—	25	6	Silicon Labs Si828x
<b>18 – 36 Vdc input</b>									
MA5237-ELD	7.5	5.0 V, 1.5 A	2.5 V, 20 mA	500	1 : 0.5	1 : 0.25	60	11	Maxim MAX17498B
Q4437-BL	15.0	5.0 V, 1.8 A 12 V, 0.25 A -12 V, 0.25 A	—	100	1 : 0.5 1 : 1.167 1 : 1.167	—	55	15	TI LM258X (T5)
Q4338-BL	15.0	5.0 V, 1.8 A	—	100	1 : 0.5	—	66	18	TI LM258X (T5)
CJ8758-AL	19.9	24 V, 0.833 A 12 V, 0.25 A -12 V, 0.25 A	—	200	1 : 1.85 1 : 1.167 1 : 1.167	—	33	12	Maxim MAX17597
Q4438-BL	15.1	12 V, 0.63 A -12 V, 0.63 A	—	100	1 : 1.2 1 : 1.2	—	65	15	TI LM258X (T6)
Q4339-BL	15.1	12 V, 0.63 A -12 V, 0.63 A	—	100	1 : 1.2 1 : 1.2	—	66	18	TI LM258X (T6)
Q4344-BL	33.0	12 V, 0.75 A -12 V, 0.75 A 5.0 V, 3 A	—	100	1 : 0.35 1 : 0.8 1 : 0.8	—	85	22	TI LM258X (T4)
Q4343-BL	33.6	12 V, 1.4 A -12 V, 1.4 A	—	100	1 : 0.8 1 : 0.8	—	85	22	TI LM258X (T3)
<b>20 – 28 Vdc input</b>									
GA3429-BLD	5.0	3.3 V, 1.5 A	3.3 V, 20 mA	250	1 : 0.25	1 : 0.25	24	7	Linear LT3573
<b>22 – 26 Vdc input</b>									
GA3136-BL	50	53 V, 1A	—	150	1 : 1.4	1 : 0.33	36	16	TI UCC2809
<b>400 V input</b>									
GA3502-BL	44	110 V, 0.4 A	18 V, 20 mA	250	1 : 0.35	1 : 0.06	800	16	Maxim MAX16801

**Bold** = new product



Part number	Power (W)	Output	Aux / bias	Nominal freq. (kHz)	Turns ratio		L at 0 A (µH)	Dim dwg	Designed for
					pri : sec	pri : aux			
<b>ac line input (85 – 130 Vac)</b>									
A9619-CL	7	12 V, 0.58 A		100	1 : 0.1	1 : 0.14	3200	22	ON Semi NCP101X
MA5157-AL	17	23 V, 0.74 A	19 V, 20 mA	100	1 : 0.23	1 : 0.20	750	20	NXP Semi SSL2103
<b>ac line input (195 – 265 Vac)</b>									
PA6284L	11	12–18 V, 0.64 A	20 V, 10 mA	100	1 : 0.136	1 : 0.144	1400	8	ST Micro STEVAL-ILL055V1
B0570-BL	15	12 V, 1.25 A		100	1 : 0.06	1 : 0.08	3400	22	ON Semi NCP101X
<b>Universal ac line input (85 – 265 Vac)</b>									
Y8844-AL	3.5	6.5 V, 0.54 A	—	100	1 : 0.08	—	2900	12	ON Semi NCP1201
HA4018-AL	4.3	15 V, 0.05 A 5 V, 0.35 A –15 V, 1.125 A	12 V, 20 mA	50	1 : 0.12 1 : 0.067 1 : 0.189	1 : 0.156	2200	20	TI UCC28600
GA3544-BL	5	12 V, 0.2 A 12 V, 0.2 A	—	100	1 : 0.158 1 : 0.158	1 : 0.079	2300	20	TI UCD3K
HA3905-CLD	5	15 V, 0.33 A	10 V, 20 mA	100	1 : 0.16	1 : 0.11	2300	8	TI SLUU341
<b>MA5597-AL</b>	6	12 V, 0.5 A	12.85 V, 0.2 A	100	1 : 0.125	1 : 0.133	3400	22	ON Semi NCP1072
DA2077-AL	10	5.0 V, 2 A	12.5 V, 10 mA	65	1 : 0.06	1 : 0.15	3400	22	ON Semi NCP1027
Y8848-AL	10	12 V, 0.83 A	—	100	1 : 0.10	—	1800	22	ON Semi NCP1202
GA3172-AL	14	20 V, 0.7 A	12 V, 20 mA	125	1 : 0.214	1 : 0.131	500	17	Microchip AC LED Driver
JA4429-AL	24	24 V, 1.0 A	24 V, 20 mA	100	1 : 0.24	1 : 0.24	400	19	Linear LT1399
CR8076-AL	30	15 V, 0.65 A 7.5 V, 0.7 A 5 V, 0.7 A		250	1 : 0.125 1 : 0.042 1 : 0.083		250	10	Maxim MAX17497A/B
GA0007-AL	48	32 V, 1 A 16 V, 0.75 A	16 V, 20 mA	45	1 : 0.2	1 : 0.2	270	21	ON Semi NCP1351
<b>KA5037-BL</b>	66	12 V, 5.5 A	20 V, 20 mA	50	1 : 0.125	1 : 0.156	560	27	ON Semi NCP4305FBDAP
KA5038-BL	66	19 V, 3.5 A	5.5 V, 20 mA	50	1 : 0.188	1 : 0.156	560	27	ON Semi NCP1236
Z9007-BL	67	16 V, 4.2 A	—	100	1 : 0.16	—	700	25	ON Semi NCP1200
Z9260-AL	67	16 V, 4.2 A	15 V, 1.2 A	100	1 : 0.16	1 : 0.15	700	25	ON Semi NCP1200
GA3366-BL	90	19.5 V, 4.62 A	16 V, 20 mA	100	1 : 0.147	1 : 0.118	300	28	ON Semi NCP1606
FA2443-AL	120	19.4 V, 6.2 A	—	140	1 : 0.167	1 : 0.167	200	26	TI UCC28600

#### Capacitor Charging Transformers

Part number	Peak input current (A)	Output voltage (V)	Aux / bias output	Nominal freq. (kHz)	Turns ratio		L at 0 A (µH)	Dim dwg	Designed for
					pri : sec	pri : aux			
CJ5143-ALD	1.2	350	—	1.0	1 : 15	—	15	1	ON NCP5080 Cap. Charger
HA4060-AL	2.0	500	—	100	1 : 3	—	300	16	Linear LT3751 Cap. Charger
GA3459-BL	3.0	500	—	50	1 : 10	—	5.0	16	Linear LT3751 Cap. Charger
DA2032-ALD	3.0	300	—	100	1 : 10	—	10	9	Linear LT3750 Cap. Charger
HA4061-AL	5.0	500	—	100	1 : 3	—	125	24	Linear LT3751 Cap. Charger
DA2033-ALD	5.0	300	—	100	1 : 10	—	10	11	Linear LT3750 Cap. Charger
DA2034-ALD	10	300	—	100	1 : 10	—	10	14	Linear LT3750 Cap. Charger
GA3460-BL	50	500	—	50	1 : 10	—	2.5	16	Linear LT3751 Cap. Charger


#### Transformers for Cell Balancing

Part number	Peak input current (A)	Output voltage (V)	Aux / bias output	Nominal freq. (kHz)	Turns ratio		L at 0 A (µH)	Dim dwg	Designed for
					pri : sec	pri : aux			
NA5743-ALD	7.0	30–80	—	150	1 : 4	—	4.0	7	Linear LT8584 Cell Balancer
NA6252-ALD	7.0	9–36	—	150	1 : 1.33	—	4.0	7	Linear LT8584 Cell Balancer
NA5920-ALD	7.0	100–400	—	150	1 : 24	—	4.0	7	Linear LT8584 Cell Balancer

#### Solar Inverter Transformers (dc to ac)

Part number	Peak input current (A)	Output voltage (V)	Aux / bias output	Nominal freq. (kHz)	Turns ratio		L at 0 A (µH)	Dim dwg	Designed for
					pri : sec	pri : aux			
JA4635-AL	10.5	110 VAC	—	150	1 : 6	—	28	29	Microchip AN1338
NA5919-AL	13.6	110 VAC	—	150	1 : 4	—	55	29	Microchip AN1444
KA4823-CL	10.5	220 VAC	—	150	1 : 12	—	28	29	Microchip AN1338
NA5814-AL	13.6	220 VAC	—	150	1 : 7	—	55	29	Microchip AN1444

**Bold** = new product

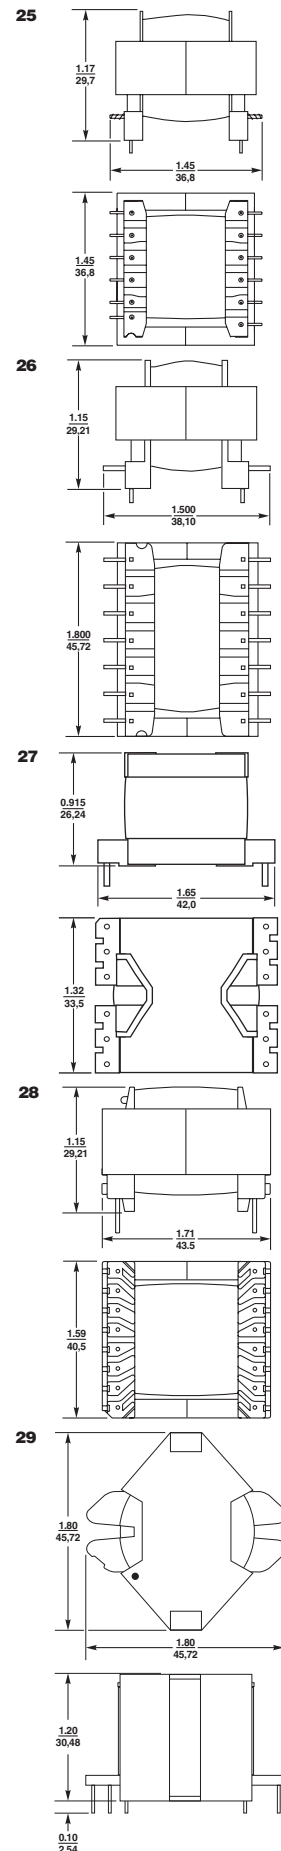

Visit [www.coilcraft.com](http://www.coilcraft.com) for forward-mode, gate-drive, isolation transformers and power factor magnetics.



# High Frequency Current Sensing Transformers

These Current Sensing Transformers are designed for use from 1 kHz up to 1 MHz to sense current as high as 40 Amps. They are available in a wide range of turns ratios and are ideal for use in switching power supply applications. The CST1 and CST2 Series differ in pinouts to meet the requirements of different applications. All but the CS4xxx are surface mount parts.



## CST4835

Part number	Turns ratio pri:sec	Inductance min (µH)	DCR max (Ohms)		Primary current max (A)	Terminating resistance R <sub>T</sub> (Ohms)
			primary	secondary		
CST4835-020EC	1:20	33	0.003	0.35	7.0	2.9
CST4835-030EC	1:30	74	0.003	0.90	7.0	4.3
CST4835-040EC	1:40	132	0.003	1.60	7.0	5.7
CST4835-050EC	1:50	205	0.003	2.50	7.0	7.1
CST4835-060EC	1:60	295	0.003	3.60	7.0	8.6
CST4835-070EC	1:70	400	0.003	4.60	7.0	10.0
CST4835-100EC	1:100	820	0.003	9.50	7.0	14.3
CST4835-125EC	1:125	1280	0.003	13.0	7.0	17.9
CST4835-150EC	1:150	1800	0.003	21.0	7.0	21.4

## T6522

Part number	Turns ratio pri:sec	Inductance min (mH)	Sensed current max (A)	Sensitivity		Terminating resistance R <sub>T</sub> (Ohms)
				V <sub>out</sub> (V)	I <sub>in</sub> (A)	
T6522-ALD	1:50	3.4	3	1	0.5	50



## CST7030

Part number	Turns ratio pri:sec	Inductance min (mH)	DCR max (Ohms)		Primary current max (A)	Terminating resistance R <sub>T</sub> (Ohms)
			primary	secondary		
CST7030-020LC	1:20	0.053	0.0015	0.420	20	2.0
CST7030-050LC	1:50	0.333	0.0015	2.76	20	5.0
CST7030-070LC	1:70	0.652	0.0015	5.04	20	7.0
CST7030-100LC	1:100	1.330	0.0015	10.68	20	10.0
CST7030-150LC	1:150	2.993	0.0015	22.30	20	15.0

## CU8965-AL

Part number	Turns ratio pri:sec	Inductance min (mH)	DCR max (Ohms)		Primary current max (A)	Terminating resistance R <sub>T</sub> (Ohms)
			primary	secondary		
CU8965-ALC	1:100	1.33	0.0015	10.68	20	10.0



## CST1 / CST2

Part number	Turns ratio pri:sec	Inductance min (µH)	DCR (Ohms)		Primary current max (A)	Terminating resistance R <sub>T</sub> (Ohms)
			pri ref	sec max		
CST1/CST2-020LD	1:20	81	0.0007	0.400	20	2.0
CST1/CST2-030LD	1:30	180	0.0007	0.870	20	3.0
CST1/CST2-040LD	1:40	320	0.0007	1.14	20	4.0
CST1/CST2-050LD	1:50	500	0.0007	1.50	20	5.0
CST1/CST2-060LD	1:60	730	0.0007	1.98	20	6.0
CST1/CST2-070LD	1:70	980	0.0007	4.75	20	7.0
CST1/CST2-100LD	1:100	2000	0.0007	5.50	20	10.0
CST1/CST2-125LD	1:125	3000	0.0007	6.50	20	12.5



## CST2010

Part number	Turns ratio pri:sec	Inductance min (mH)	DCR max (Ohms)		Primary current max (A)	Terminating resistance R <sub>T</sub> (Ohms)
			primary	secondary		
CST2010-020LD	1:20	0.34	0.00036	0.180	40	2.0
CST2010-030LD	1:30	0.76	0.00036	0.265	40	3.0
CST2010-040LD	1:40	1.36	0.00036	0.560	40	4.0
CST2010-050LD	1:50	2.12	0.00036	0.705	40	5.0
CST2010-060LD	1:60	3.06	0.00036	0.850	40	6.0
CST2010-070LD	1:70	4.16	0.00036	1.00	40	7.0
CST2010-080LD	1:80	5.44	0.00036	1.15	40	8.0
CST2010-100LD	1:100	8.50	0.00036	1.45	40	10.0
CST2010-125LD	1:125	13.3	0.00036	1.85	40	12.5
CST2010-150LD	1:150	19.2	0.00036	2.25	40	15.0
CST2010-200LD	1:200	34.0	0.00036	4.06	40	20.0

## SCS

Part number	Turns ratio pri:sec	Inductance min (mH)	DCR max (Ohms)		Primary current max (A)	Terminating resistance R <sub>T</sub> (Ohms)
			primary	secondary		
SCS-050LD	1:50	3.8	0.0024	0.90	30	5.0
SCS-100LD	1:100	14.8	0.0024	1.80	30	10.0
SCS-200LD	1:200	59.2	0.0024	3.90	30	20.0




## CST2020

Part number	Turns ratio pri:sec	Inductance min (mH)	DCR max (Ohms)		Primary current max (A)	Terminating resistance R <sub>T</sub> (Ohms)
			primary	secondary		
CST2020-070L	1:70	3.46	0.00084	0.83	40	1.75
CST2020-100L	1:100	7.07	0.00084	1.23	40	2.5
CST2020-200L	1:200	28.28	0.00084	3.95	40	5.0
CST2020-300L	1:300	63.63	0.00084	7.84	40	7.5


## CS4xxx

Part number	Turns ratio pri:sec	Inductance min (mH)	Sensed current max (A)	Sensitivity		Terminating resistance R <sub>T</sub> (Ohms)
				V <sub>out</sub> (V)	I <sub>in</sub> (A)	
CS4050V-01L	1:50	5.0	10	1	1	50
CS4100V-01L	1:100	20	24	1	1	100
CS4200V-01L	1:200	80	35	1	1	200


### CST1 / CST2, CST2010




### CST4835, CST7030, CU8965-AL




### CST2020

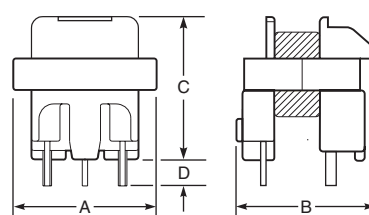


### T6522-AL



### SCS



### CS4



### Dimensions (inches mm)

Series	A max	B max	C max	D max
CST1 / CST2	0.315 8,0	0.320 8,13	0.209 5,3	
CST2010	0.573 14,55	0.784 19,91	0.413 10,5	
CST2020	0.728 18,5	0.780 19,8	0.780 19,8	0.177 4,5
CS4xxx	0.77 19,56	0.57 14,48	0.78 19,81	0.150 3,81
CST7030	0.205 5,2	0.276 7,0	0.118 3,0	
CST4835	0.173 4,4	0.177 4,5	0.138 3,5	
CU8965	0.205 5,2	0.276 7,0	0.118 3,0	
SCS	0.479 12,17	0.479 12,17	0.413 10,5	
T6522	0.430 10,9	0.300 7,62	0.25 6,35	



# Current Sensors

These parts function as the encapsulated secondary of a current transformer while the conductor carrying the current to be measured serves as the "one turn primary." Sensitivity may be enhanced by increasing primary turns. Minimum insulation wall thickness of the hole is 0.5 mm.




## High Frequency Sensors


Designed for use at 1-1000 kHz and higher, these sensors are ideal for sensing branch circuit overload, switcher feedback, detecting load drop or shutdown, etc. Coilcraft Designer's Kit P403 contains samples of the D18xx, CS1xxx (except CS1750L), CS60-010L and CS41xxx.

Part number	Turns	Inductance min (mH)	Sensed current max (A)	Sensitivity Vout (V) / Iin (A)	Terminating resistor (Ohms)	Color code
D1869L	50	5	10	1 1	50	Green
D1870L	100	20	24	1 1	100	Brown
D1871L	200	80	35	1 1	200	Red
CS1050L	50	5	10	1 1	50	
CS1100L	100	20	24	1 1	100	
CS1200L	200	80	35	1 1	200	
CS1750L	750	1125	30	1 1	750	


### D18xxL, CS60-010L



### CS1xxxL



### CS60-050L, CS60-075L, CS60-100L



### Dimensions (inches mm)


Series	A max	B max	C max	D min	E cen	F cen	G
D18xx	0.75 19,05	0.465 11,81	0.80 20,30	0.20 5,08	0.50 ±0.015 12,7 ±0,38		0.45 11,43
CS1xxx	0.70 17,8	0.375 9,53	0.80 20,30	0.20 5,08	0.50 ±0.015 12,7 ±0,38		0.19 ±0.03 4,83 ±0,76
CS60-010L	0.75 19,05	0.465 11,81	0.80 20,30	0.125 19,05	0.50 ±0.015 12,7 ±0,38		0.45 11,43
CS60-XXXL	1.10 27,9	0.750 19,05	1.25 31,75	0.350 8,89	0.600 ±0.010 15,24 ±0,25	0.250 ±0.010 6,35 ±0,25	0.150 ±0.030 3,81 ±0,76



## 50/60 Hz Transformer

This transformer is designed for measuring current from 0.5 to 20 Amps rms.

Part number	Recommended current (Irms)	Isolation (Vrms)
CS2106L	0.5-20	2500

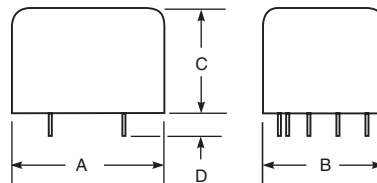

### Dimensions (inches mm)

Series	A max	B max	C max	D min
CS2106L	1.05 26,67	0.850 21,59	0.725 18,42	0.150 3,81

## 50/60 Hz Sensors

These parts are designed for measuring current from 0.5 up to 100 Amps rms.

Part number	Recommended current (Irms)	V out tolerance
CS60-010L	1-10	±10%
CS60-050L	5-50	±10%
CS60-075L	5-75	±10%
CS60-100L	5-100	±10%





# Common Mode EMI/RFI Filters

Coilcraft offers EMI/RFI common mode chokes for the suppression of radiated and/or conducted EMI. Data/signal line filters such as our **USB** Family dramatically suppress common mode noise with minimal impact on high-speed differential signals. The **PFD**, **LPD** and **MSD** parts can be used to attenuate common-mode or differential-mode noise in both data and power line applications. Power line chokes like the **CMT** and **BU** Series reduce common mode noise from AC power.

## Data Line Common Mode EMI Chokes



The **CJ5100**, **CQ7584**, and **CR7856** surface mount data line common mode chokes are designed to attenuate up to 100 MHz common mode noise. The **PDLF** Series can reduce noise by a factor of 32 from 15 MHz to 300 MHz and are available in 2, 3 and 4 line versions. The **PTRF** Series is optimized for FCC and ITU-T (formerly CCITT) requirements. These parts provide 15 to 25 dB attenuation, greater than 1000 Ohms impedance and 1500 V isolation between windings. **M2022** can suppress common mode noise up to 500 MHz in a compact 1812 package.

### CJ5100, CQ7584, CR7856



Part number	Common mode peak impedance max (kOhms)	Cutoff frequency (MHz)	Inductance (mH)		DCR max (Ohms)	Isolation (Vrms)	I <sub>rms</sub> (mA)
			nom	min			
CJ5100-AL	4.49 @ 9.9 MHz	920	0.47	0.329	0.24	500	850
CQ7584-AL	6.81 @ 4.1 MHz	760	2.20	1.54	0.40	500	650
CR7856-AL	7.65 @ 0.76 MHz	460	4.70	3.29	1.3	500	470

CJ5100, CQ7584, CR7856, DFT7160




### DFT7160




**NEW!**

Part number	Common mode impedance max (kOhms)	Cutoff frequency (MHz)	Inductance min (mH)	DCR max (Ohms)	Isolation (Vrms)	I <sub>rms</sub> (mA)
DFT7160-513BLC	4.00 @ 55 MHz	570	0.0357	0.300	250	700
DFT7160-474BLC	2.42 @ 7.5 MHz	410	0.329	0.210	250	1000
DFT7160-105BLC	3.12 @ 6.0 MHz	420	0.700	0.210	250	900
DFT7160-225BLC	6.66 @ 4.7 MHz	670	1.54	0.500	250	600
DFT7160-475BLC	13.47 @ 3.0 MHz	440	3.29	0.600	250	500

PDLF / PTRF Series



M2022 Series



### PDLF



Part number	Lines	Common mode peak impedance (kOhms)	Cutoff frequency (GHz)	Inductance (μH)	DCR max (mOhms)	Isolation (Vrms)	Current (mA)
PDLF4500LC	4	0.848 @ 200 MHz	0.88	5.0	200	300	500
PDLF3000LC	3	0.901 @ 280 MHz	1.4	5.0	250	300	100
PDLF3500LC	3	0.910 @ 210 MHz	1.1	5.0	200	300	500
PDLF2000LC	2	0.958 @ 280 MHz	1.3	5.0	250	300	100
PDLF2500LC	2	0.929 @ 250 MHz	1.2	5.0	200	300	500

### PTRF



Part number	Lines	Common mode peak impedance (kOhms)	Cutoff frequency (MHz)	Inductance min (μH)	DCR max (mOhms)	Isolation (Vrms)	Current (mA)
PTRF4000LC	2	0.851 @ 12 MHz	41	35	0.135	1500	500

### M2022




Part number	Common mode impedance max (kOhms)	Cutoff frequency (MHz)	Inductance min (μH)	DCR max (mOhms)	Isolation (Vrms)	Current (mA)
M2022-ALPLC	40.0 @ 160 MHz	120	4.0 ±10%	990	500	500
M2022-ASLC	32.0 @ 66 MHz	140	11.5	850	500	500

### Dimensions (inches mm)

Series	A max	B max	C max	D ref	E typ	F	G
CJ5100-AL	0.370 9.4	0.236 6.0	0.189 4.8				
CQ7584-AL	0.370 9.4	0.220 5.6	0.189 4.8				
CR7856-AL	0.370 9.4	0.217 5.5	0.193 4.9				
DFT7160	0.370 9.4	0.220 5.6	0.193 4.9				
M2022-ALC	0.195 4.95	0.150 3.81	0.135 3.43	0.030 0.76	0.040 1.02		0.070 1.78
M2022-ALPLC	0.195 4.95	0.150 3.81	0.079 2.01	0.030 0.76	0.040 1.02		0.070 1.78
M2022-ASLC	0.231 5.87	0.196 4.98	0.150 3.81	0.030 0.76	0.040 1.02		0.107 2.72
PDLF	0.329 8.35	0.223 5.65	0.146 3.70	0.020 0.50	0.395 1.00	0.050 1.27	
PTRF	0.329 8.35	0.223 5.65	0.146 3.70	0.020 0.50	0.395 1.00	0.050 1.27	

# High-Speed Data Line EMI Chokes

Coilcraft's RA6870, CM1394 and USB Families of high-speed data line common mode chokes effectively reduce common mode noise in high-speed interfaces like USB 2.0, USB 3.1 Gen 1, HDBaseT™, MOST® bus, etc. They maintain excellent signal integrity for high-speed communications with the -3dB differential mode cutoff frequency up to 6.5 GHz. Most provide greater than 30 dB common mode attenuation at 500 MHz and 25 dB in the GHz band.



Dimensions (inches mm)

Series	A max	B max	C max
0603USB	0.063 1,60	0.033 0,84	0.046 1,17
0805USB	0.084 2,13	0.054 1,37	0.065 1,65
0805USBF	0.084 2,13	0.054 1,37	0.055 1,40
0805USBN	0.087 2,20	0.055 1,40	0.037 0,93
1206USB	0.130 3,30	0.067 1,70	0.076 1,93
CM1394LC	0.231 5,87	0.196 4,98	0.150 3,81
RA6870ALC	0.084 2,13	0.054 1,37	0.065 1,65

## 0603USB

Part number	Common mode impedance (kOhms)	Cutoff frequency (GHz)	Common mode attenuation typ (dB)			Inductance min (nH)	DCR max (Ohms)	Isolation (Vrms)	Irms (mA)
			100 MHz	500 MHz	1 GHz				
0603USB-251MLC	>0.10 @ >3.0 GHz	3.8	1.31	3.16	8.45	18	0.077	250	500
0603USB-601MLC	>0.18 @ >3.0 GHz	3.4	3.00	6.88	13.27	37	0.109	250	500
0603USB-951MLC	0.30 @ 2.6 GHz	2.8	4.62	9.75	16.06	63	0.142	250	500
0603USB-142MLC	0.42 @ 1.9 GHz	1.9	6.85	12.80	18.16	98	0.174	250	500
0603USB-222MLC	0.71 @ 2.9 GHz	0.96	9.14	16.53	20.29	150	0.209	250	500

## 0805USB

Part number	Common mode impedance (kOhms)	Cutoff frequency (GHz)	Common mode attenuation typ (dB)			Inductance min (nH)	DCR max (Ohms)	Isolation (Vrms)	Irms (mA)
			10 MHz	100 MHz	500 MHz				
0805USB-421MLC	>0.22 @ >3.0 GHz	3.5	1.1	2.3	8.4	23	0.12	250	500
0805USB-901MLC	>0.29 @ >3.0 GHz	2.5	1.4	4.2	16.9	47	0.17	250	500
0805USB-172MLC	0.64 @ 1.8 GHz	1.8	2.3	6.7	22.0	84	0.25	250	500
0805USB-262MLC	0.82 @ 1.8 GHz	1.5	3.0	8.6	27.8	147	0.26	250	500
0805USB-372MLC	1.06 @ 1.4 GHz	0.82	4.5	11.9	34.3	189	0.32	250	500
0805USB-502MLC	1.42 @ 1.1 GHz	0.70	4.9	14.5	31.3	273	0.37	250	500
0805USB-672MLC	1.75 @ 0.93 GHz	0.46	8.4	16.6	30.0	322	0.45	250	500
0805USB-902MLC	2.06 @ 0.90 GHz	0.47	8.7	18.7	30.5	413	0.65	250	400



## 0805USBF

Part number	Common mode impedance (kOhms)	Cutoff frequency (GHz)	Common mode attenuation typ (dB)			Inductance min (nH)	DCR max (Ohms)	Isolation (Vrms)	Irms (mA)
			10 MHz	100 MHz	500 MHz				
0805USBF-421MRC	>0.14 @ >3.0 GHz	6.6	0.5	4.6	6.9	28	0.11	250	500
0805USBF-901MRC	>0.30 @ >3.0 GHz	5.8	2.1	9.1	11.8	60	0.14	250	500
0805USBF-172MRC	0.52 @ 2.5 GHz	3.3	4.0	12.8	15.7	101	0.22	250	500
0805USBF-262MRC	0.69 @ 2.0 GHz	2.4	5.7	15.4	18.5	165	0.235	250	500
0805USBF-372MRC	0.93 @ 1.8 GHz	1.4	5.8	18.1	22.3	241	0.27	250	500
0805USBF-502MRC	1.22 @ 1.5 GHz	0.93	11.2	21.6	25.2	315	0.32	250	500
0805USBF-672MRC	1.65 @ 1.2 GHz	0.69	11.3	23.3	27.7	434	0.37	250	450
0805USBF-902MRC	1.91 @ 1.0 GHz	0.73	12.6	25.4	30.0	560	0.63	250	350

## 0805USBN

Part number	Common mode impedance (kOhms)	Cutoff frequency (GHz)	Common mode attenuation typ (dB)			Inductance min (nH)	DCR max (Ohms)	Isolation (Vrms)	Irms (mA)
			10 MHz	100 MHz	500 MHz				
0805USBN-121MRC	0.14 @ 2.6 GHz	6.4	0.04	0.5	5.0	14	0.11	250	500
0805USBN-271MRC	0.30 @ 2.5 GHz	5.1	0.09	1.4	10.0	30	0.14	250	500
0805USBN-481MRC	0.60 @ 3.0 GHz	3.4	0.13	3.5	14.7	53	0.22	250	500
0805USBN-701MRC	0.79 @ 2.0 GHz	3.4	0.18	5.3	17.4	77	0.235	250	500
0805USBN-941MRC	1.28 @ 1.4 GHz	3.5	0.30	7.6	21.1	105	0.27	250	500
0805USBN-132MRC	1.61 @ 1.2 GHz	2.3	0.50	10.0	24.4	140	0.32	250	500
0805USBN-162MRC	2.00 @ 1.0 GHz	1.5	0.78	12.1	27.3	182	0.37	250	450
0805USBN-222MRC	2.47 @ 0.96 GHz	1.7	1.14	14.0	30.0	252	0.63	250	350

## 1206USB

Part number	Common mode impedance (kOhms)	Cutoff frequency (GHz)	Common mode attenuation typ (dB)			Inductance min (nH)	DCR max (Ohms)	Isolation (Vrms)	Irms (mA)
			10 MHz	100 MHz	500 MHz				
1206USB-371MLC	0.21 @ 3.0 GHz	2.7	1.0	2.1	12.0	31	0.10	250	1000
1206USB-102MLC	0.36 @ 1.9 GHz	2.2	1.5	4.2	19.0	66	0.14	250	850
1206USB-172MLC	0.55 @ 1.5 GHz	2.1	2.3	6.8	26.0	107	0.18	250	700
1206USB-262MLC	0.76 @ 1.1 GHz	2.0	3.0	9.7	31.0	161	0.22	250	600
1206USB-372MLC	1.11 @ 1.1 GHz	1.2	4.7	12.0	33.0	226	0.26	250	600
1206USB-532MLC	1.45 @ 0.93 GHz	0.78	5.5	15.0	35.0	319	0.30	250	600
1206USB-672MLC	1.69 @ 0.93 GHz	0.75	7.3	16.5	33.0	412	0.34	250	500
1206USB-872MLC	1.99 @ 0.72 GHz	0.53	9.1	18.0	32.0	510	0.39	250	500
1206USB-113MLC	2.24 @ 0.66 GHz	0.51	10.2	21.0	31.0	623	0.44	250	500
1206USB-223MLC	3.36 @ 0.34 GHz	0.22	22.4	33.1	32.3	1040	0.085	250	120



## RA6870

Part number	Common mode impedance (kOhms)	Cutoff frequency (GHz)	Common mode attenuation typ (dB)			Inductance min (nH)	DCR max (Ohms)	Isolation (Vrms)	Irms (mA)
			10 MHz	100 MHz	500 MHz				
RA6870-ALC	1.94 @ 700 MHz	0.59	12.7	26.2	30.8	700	0.69	250	300

## CM1394

Part number	Common mode impedance (kOhms)	Cutoff frequency (GHz)	Common mode attenuation typ (dB)			Inductance min (nH)	DCR max (Ohms)	Isolation (Vrms)	Irms (A)
			100 MHz	400 MHz	500 MHz				
CM1394LC	0.813 @ 660 MHz	1.2	11.1	21.1	22.7	220	0.105	50	1.5





# Surface Mount Power Line Common Mode EMI Chokes

Coilcraft's low-cost, high-performance surface mount power line common mode chokes come in a variety of sizes and packages. They are designed to eliminate AC line conducted common mode noise across a broad range of frequencies, with up to 1500 Vrms isolation. These common mode chokes can operate for a wide range of current from 0.06 Amps to 15 Amps, providing attenuation where line filtering is needed, such as in switch-mode power supplies.



## Power Line


Part number	Common mode peak impedance (kOhms)	Inductance (mH)		Irms (A)	DCR max (mOhms)	Isolation (Vrms)
		nom	min			
CE1755-AL	3.33 @ 5.8 MHz	0.88	0.57	1.2	130	1000
CR7915-AL	3.10 @ 4.9 MHz	1.12	0.73	2.6	49.5	1500
CF3094-AL	7.95 @ 2.8 MHz	1.17	0.76	1.1	200	1000
CM6518-AL	4.17 @ 1.9 MHz	1.40	0.91	2.5	60.0	1000
CJ5094-CL	28.28 @ 0.26 MHz	10.0	6.5	1.2	180	1000
CV9172-AL	70.01 @ 0.21 MHz	22.0	14.3	0.57	850	1000
CF2638L	2.59 @ 4.5 MHz	0.22	0.14	2.9	60.0	1000
CD1479-AL	4.19 @ 3 MHz	0.59	0.38	4.2	20.0	1000
CH4659-AL	4.56 @ 2.5 MHz	0.77	0.50	4.7	40.0	1000
CD1480-BL	4.53 @ 2.2 MHz	1.32	0.85	3.5	60.0	1000
CE2439L	9.42 @ 1.1 MHz	1.47	0.96	2.5	80.0	1000
CG3333-AL	2.27 @ 3.1 MHz	0.90	0.59	3.7	50.0	1000
CG3528-AL	6.57 @ 0.98 MHz	3.00	1.95	3.1	42.0	1000
CE1759-AL	5.65 @ 1.8 MHz	0.81	0.52	6.0	14.0	1000
CG3885-AL	3.11 @ 1.8 MHz	0.47	0.30	10.0	8.0	1000
CF2805-AL	3.64 @ 1.9 MHz	0.63	0.40	6.8	14.0	1000

## SBU9




Part number	Common mode peak impedance (kOhms)	Inductance min (mH)	Irms (A)	DCR max (Ohms)	Isolation (Vrms)
SBU9-2820R5LD	26.31 @ 570 kHz	2.8	0.50	0.70	1500
SBU9-1320R7LD	12.68 @ 900 kHz	1.3	0.70	0.38	1500
SBU9-6011R0LD	6.66 @ 1300 kHz	0.6	1.00	0.20	1500


CE1755,  
CR7915,  
CF3094




CM6518,  
CJ5094,  
CV9172,  
CF2638L,  
CD1479,  
CH4659,  
CD1480,  
CE2439L,  
CG3333,  
CG3528



CE1759,  
CG3885,  
CF2805



SBU9




### Dimensions (inches mm)

Series	A max	B max	C max
CE1755-AL	0.512 13.0	0.512 13.0	0.215 5.46
CR7915-AL	0.512 13.0	0.512 13.0	0.220 5.6
CF3094-AL	0.512 13.0	0.512 13.0	0.215 5.46
CM6518-AL	0.645 16.38	0.560 14.22	0.350 8.90
CJ5094-CL	0.645 16.38	0.560 14.22	0.350 8.90
CV9172-AL	0.645 16.38	0.560 14.22	0.350 8.90
CF2638L	0.770 19.56	0.670 17.02	0.390 9.91
CD1479-AL	0.770 19.56	0.670 17.02	0.390 9.91
CH4659-AL	0.770 19.56	0.670 17.02	0.390 9.91
CD1480-BL	0.770 19.56	0.670 17.02	0.390 9.91
CE2439L	0.770 19.56	0.670 17.02	0.390 9.91
CG3333-AL	0.770 19.56	0.670 17.02	0.390 9.91
CG3528-AL	0.770 19.56	0.670 17.02	0.390 9.91
CE1759-AL	1.02 26.0	1.22 31.0	0.512 13.0
CG3885-AL	1.02 26.0	1.22 31.0	0.50 12.7
CF2805-AL	1.02 26.0	1.22 31.0	0.50 12.7
SBU9	0.717 18.2	0.492 12.5	0.362 9.2

# Through-Hole Power Line Common Mode EMI Chokes

Coilcraft's low-cost through-hole BU Series high efficiency choke coils are designed to eliminate line conducted common mode noise across a broad range of frequencies. The BU9S and BU9HS are ideal for signal line applications; the other BUs can be used in switching power supplies and power supply circuits. For low profile applications, the BU9 and BU9S filters are available in a horizontal configuration that reduces their height to under half an inch (12.5 mm).

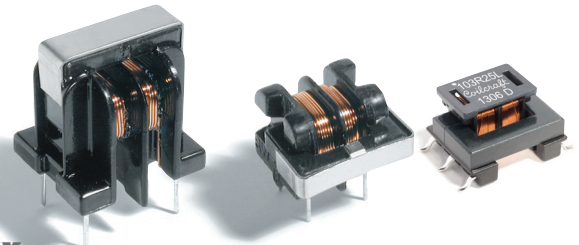


## BU, BU9x

Part number	Common mode peak impedance (kOhms)	Inductance min (mH)	DCR (Ohms)	Isolation (Vrms)	Irms (A)
BU9S-153R15BL	121.5 @ 4300 kHz	15.0	5.0	1000	0.15
BU9S-7020R3BL	59.81 @ 3700 kHz	7.0	2.5	1000	0.30
BU9HS-153R15BL	121.5 @ 4300 kHz	15.0	5.0	1000	0.15
BU9HS-7020R3BL	59.81 @ 3700 kHz	7.0	2.5	1000	0.30
BU9-103R25BL	123.5 @ 250 kHz	10.0	3.5	1000	0.25
BU9-2820R5BL	25.12 @ 660 kHz	2.8	1.0	1000	0.50
BU9-1320R7BL	17.48 @ 980 kHz	1.3	0.5	1000	0.70
BU9-6011R0BL	5.43 @ 2100 kHz	0.6	0.2	1000	1.00
BU9-2011R6BL	4.39 @ 2900 kHz	0.2	0.1	1000	1.60
BU9H-103R25BL	123.5 @ 250 kHz	10.0	3.5	1000	0.25
BU9H-2820R5BL	25.12 @ 660 kHz	2.8	1.0	1000	0.50
BU9H-1320R7BL	17.48 @ 980 kHz	1.3	0.5	1000	0.70
BU9H-6011R0BL	5.43 @ 2100 kHz	0.6	0.2	1000	1.00
BU9H-2011R6BL	4.39 @ 2900 kHz	0.2	0.1	1000	1.60


## BUxx

Part number	Common mode peak impedance (kOhms)	Inductance min (mH)	DCR (Ohms)	Isolation (Vrms)	Irms (A)
BU10-1811R2BL	5.13 @ 1100 MHz	0.18	0.20	1000	1.20
BU10-1311R6BL	3.60 @ 1200 MHz	0.13	0.12	1000	1.60
BU10-1012R2BL	1.88 @ 1500 MHz	0.10	0.08	1000	2.20
BU10-6003R0BL	1.15 @ 2100 MHz	0.06	0.04	1000	3.00
BU15-4530R4BL	398.7 @ 130 kHz	45.0	3.0	1000	0.40
BU15-1430R7BL	70.62 @ 260 kHz	14.0	1.0	1000	0.70
BU15-7521R0BL	43.05 @ 340 kHz	7.5	0.6	1000	1.00
BU15-4421R3BL	41.14 @ 510 kHz	4.4	0.3	1000	1.30
BU15-2721R6BL	32.22 @ 620 kHz	2.7	0.2	1000	1.60
BU16-4530R5BL	269.6 @ 130 kHz	45.0	2.3	1000	0.50
BU16-2530R7BL	208.3 @ 190 kHz	25.0	1.3	1000	0.70
BU16-1031R0BL	57.14 @ 310 kHz	10.0	0.5	1000	1.00
BU16-4021R5BL	26.26 @ 470 kHz	4.0	0.3	1000	1.50
BU16-2022R0BL	14.41 @ 740 kHz	2.0	0.2	1000	2.00

BU9, BU9S, BU10, BU15, BU16

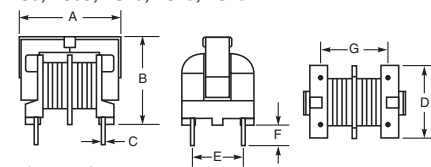

BU9H, BU9HS


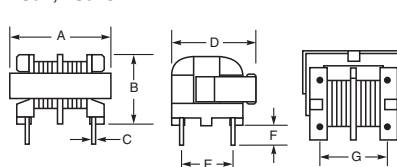


### Dimensions (inches mm)

Series	A max	B max	C	D max	E	F	G
BU9, BU9S	0.69 17.5	0.67 17.0	0.024 0.6	0.43 11.0	0.276 ±0.02 7.0 ±0.5	0.157 ±0.04 4.0 ±1.0	0.31 ±0.02 8.0 ±0.5
BU9H, BU9HS	0.69 17.5	0.49 12.5	0.024 0.6	0.61 15.5	0.276 ±0.02 7.0 ±0.5	0.157 ±0.04 4.0 ±1.0	0.31 ±0.02 8.0 ±0.5
BU10	0.75 19.0	0.89 22.5	0.028 0.7	0.67 17.0	0.394 ±0.02 10.0 ±0.5	0.177 ±0.04 4.5 ±1.0	0.51 ±0.02 13.0 ±0.5
BU15	0.91 23.0	1.08 27.5	0.028 0.7	0.75 19.0	0.40 ±0.02 10.0 ±0.5	0.177 ±0.04 4.5 ±1.0	0.51 ±0.02 13.0 ±0.5
BU16	0.91 23.0	1.08 27.5	0.028 0.7	0.75 19.0	0.394 ±0.02 10.0 ±0.5	0.177 ±0.04 4.5 ±1.0	0.51 ±0.02 13.0 ±0.5

# CMT Common Mode EMI Chokes

Coilcraft's CMT toroid style common mode chokes are designed to provide the highest common mode impedance over the widest frequency range. These parts are ideal for any application requiring a high DC current bias and are well suited for use in switch-mode power supplies. These common mode chokes are most effective in filtering supply and return conductors with in-phase signals of equal amplitude. Differential mode inductors are available for filtering out-of-phase or uneven amplitude signals.

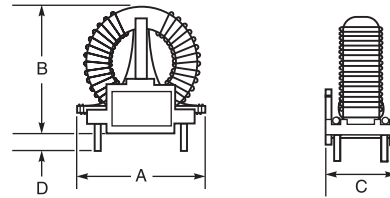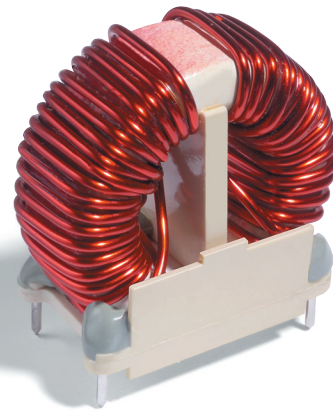

**Dimensions** (inches mm)

Series	A max	B max	C max	D ref
CMT1-5.0-1L	1.210, 30.7	1.100, 27.9	0.625, 15.9	0.150 3.81
CMT1-8.0-1L	1.210, 30.7	1.100, 27.9	0.625, 15.9	0.150 3.81
CMT1-15.0-1L	1.300, 33.0	1.155, 29.4	0.625, 15.9	0.150 3.81
CMT1-2.5-2L	1.210, 30.7	1.100, 27.9	0.625, 15.9	0.150 3.81
CMT1-4.0-2L	1.210, 30.7	1.050, 26.7	0.625, 15.9	0.150 3.81
CMT1-7.5-2L	1.300, 33.0	1.155, 29.4	0.625, 15.9	0.150 3.81
CMT1-1.3-4L	1.210, 30.7	1.100, 27.9	0.625, 15.9	0.150 3.81
CMT1-2.1-4L	1.210, 30.7	1.100, 27.9	0.625, 15.9	0.150 3.81
CMT1-3.7-4L	1.300, 33.0	1.125, 28.6	0.625, 15.9	0.150 3.81
CMT1-1.0-6L	1.210, 30.7	1.100, 27.9	0.625, 15.9	0.150 3.81
CMT1-1.7-6L	1.300, 33.0	1.155, 29.4	0.625, 15.9	0.150 3.81
CMT1-3.0-6L	1.210, 30.7	1.200, 30.5	0.625, 15.9	0.150 3.81
CMT1-6.9-9L	1.210, 30.7	1.200, 30.5	0.625, 15.9	0.150 3.81
CMT1-1.1-9L	1.210, 30.7	1.300, 33.0	0.625, 15.9	0.150 3.81
CMT1-1.9-9L	1.400, 35.6	1.300, 33.0	0.625, 15.9	0.150 3.81
CMT1-5-12L	1.210, 30.7	1.200, 30.5	0.650, 16.5	0.150 3.81
CMT1-8-12L	1.210, 30.7	1.200, 30.5	0.650, 16.5	0.150 3.81
CMT1-1.4-12L	1.210, 30.7	1.300, 33.0	0.650, 16.5	0.150 3.81
CMT1-3-15L	1.210, 30.7	1.300, 33.0	0.625, 15.9	0.150 3.81
CMT1-6-15L	1.210, 30.7	1.250, 31.8	0.650, 16.5	0.150 3.81
CMT1-1.1-15L	1.210, 30.7	1.250, 31.8	0.700, 17.8	0.150 3.81
CMT2-7.5-1L	1.310, 33.3	1.100, 27.9	0.825, 21.0	0.150 3.81
CMT2-13-1L	1.310, 33.3	1.300, 33.0	0.825, 21.0	0.150 3.81
CMT2-3.8-2L	1.310, 33.3	1.100, 27.9	0.825, 21.0	0.150 3.81
CMT2-6.5-2L	1.310, 33.3	1.300, 33.0	0.825, 21.0	0.150 3.81
CMT2-1.9-4L	1.310, 33.3	1.100, 27.9	0.825, 21.0	0.150 3.81
CMT2-3.3-4L	1.310, 33.3	1.300, 33.0	0.825, 21.0	0.150 3.81
CMT2-1.5-6L	1.310, 33.3	1.100, 27.9	0.825, 21.0	0.150 3.81
CMT2-2.6-6L	1.400, 35.6	1.100, 27.9	0.825, 21.0	0.150 3.81
CMT2-9-9L	1.310, 33.3	1.200, 30.5	0.825, 21.0	0.150 3.81
CMT2-1.5-9L	1.250, 31.8	1.250, 31.8	0.825, 21.0	0.150 3.81
CMT2-7-12L	1.250, 31.8	1.200, 30.5	0.825, 21.0	0.150 3.81
CMT2-1.2-12L	1.250, 31.8	1.200, 30.5	0.825, 21.0	0.150 3.81
CMT2-5-15L	1.300, 33.0	1.300, 33.0	0.825, 21.0	0.150 3.81
CMT2-8-15L	1.250, 31.8	1.200, 30.5	0.825, 21.0	0.150 3.81
CMT3-32-1L	1.650, 41.9	1.400, 35.6	0.925, 23.5	0.150 3.81
CMT3-56-1L	1.650, 41.9	1.650, 41.9	0.925, 23.5	0.150 3.81
CMT3-16-2L	1.650, 41.9	1.400, 35.6	0.925, 23.5	0.150 3.81
CMT3-28-2L	1.650, 41.9	1.650, 41.9	0.925, 23.5	0.150 3.81
CMT3-8-4L	1.650, 41.9	1.350, 34.3	0.925, 23.5	0.150 3.81
CMT3-14-4L	1.650, 41.9	1.700, 43.2	0.950, 24.1	0.150 3.81
CMT3-6.6-6L	1.600, 40.6	1.400, 35.6	0.925, 23.5	0.150 3.81
CMT3-11.5-6L	1.650, 41.9	1.700, 43.2	0.925, 23.5	0.150 3.81
CMT3-4-9L	1.450, 36.8	1.400, 35.6	0.925, 23.5	0.150 3.81
CMT3-7-9L	1.760, 44.7	1.760, 44.7	0.975, 24.8	0.150 3.81
CMT3-3-12L	1.700, 43.2	1.700, 43.2	0.950, 24.1	0.150 3.81
CMT3-5.2-12L	1.700, 43.2	1.700, 43.2	1.000, 25.4	0.150 3.81
CMT3-2.5-15L	1.750, 44.5	1.750, 44.5	1.000, 25.4	0.150 3.81
CMT3-4.4-15L	1.700, 43.2	1.700, 43.2	1.000, 25.4	0.150 3.81
CMT4-72-1L	2.100, 53.3	2.100, 53.3	1.130, 28.7	0.150 3.81
CMT4-125-1L	2.150, 54.6	2.200, 55.9	1.130, 28.7	0.150 3.81
CMT4-36-2L	2.150, 54.6	2.215, 56.3	1.130, 28.7	0.150 3.81
CMT4-62-2L	2.150, 54.6	2.200, 55.9	1.130, 28.7	0.150 3.81
CMT4-19-4L	2.180, 55.4	2.200, 55.9	1.130, 28.7	0.150 3.81
CMT4-32-4L	2.180, 55.4	2.200, 55.9	1.130, 28.7	0.150 3.81
CMT4-15-6L	2.180, 55.4	2.200, 55.9	1.130, 28.7	0.150 3.81
CMT4-26-6L	2.180, 55.4	2.225, 56.5	1.130, 28.7	0.150 3.81
CMT4-10-9L	2.180, 55.4	2.200, 55.9	1.130, 28.7	0.150 3.81
CMT4-17-9L	2.250, 57.2	2.280, 57.9	1.150, 29.2	0.150 3.81
CMT4-7.5-12L	2.250, 57.2	2.200, 55.9	1.130, 28.7	0.150 3.81
CMT4-13-12L	2.300, 58.4	2.250, 57.2	1.130, 28.7	0.150 3.81
CMT4-6-15L	2.250, 57.2	2.250, 57.2	1.150, 29.2	0.150 3.81
CMT4-10-15L	2.300, 58.4	2.280, 57.9	1.130, 28.7	0.150 3.81



# Designer's Kits

To simplify your prototyping, we offer low cost Designer's Kits for many of our products. Each has an assortment of standard values along with detailed product specifications. We even offer free refills for the parts you use most often. To purchase, call **800-322-2645** or order your kits on-line at <http://www.coilcraft.com/kits>.



## QUANTITY DISCOUNTS

**10% off** any combination of 3 or more

**20% off** any combination of 5 or more

**30% off** any combination of 7 or more



## SMT Products

### RF Chip Inductors

- 0201AF Series**  
Kit C471 (10% tolerance)
- 0201DS Series**  
Kit C425A & B (5% tolerance)
- 0201HL Series**  
Kit C475 (5% tolerance)
- 026011C Series**  
Kit C473 (5% tolerance)
- 026011F Series**  
Kit C474 (5% tolerance)
- 0302CS Series**  
Kit C370 (5% tolerance)
- 0402AF Series**  
Kit C397 (5% tolerance)
- 0402CS Series**  
Kit C328A & B (5% tolerance)  
Kit C328A-2 & B-2 (2% tolerance)
- 0402DC Series**  
Kit C472 (5% tolerance)  
Kit C472-2 (2% tolerance)
- 0402DF Series**  
Kit C462 (5% tolerance)
- 0402HL High Inductance Series**  
Kit C453 (5% tolerance)
- 0402HP Series**  
Kit C403A & B (5% tolerance)  
Kit C403A-2 & B-2 (2% tolerance)
- 0402PA High Current Series**  
Kit C373 (5% tolerance)
- 0403HQ High Q Series**  
Kit C371 (5% tolerance)
- 0603AF Series**  
Kit C439 (5% tolerance)
- 0603CS Series**  
Kit C324A & B (5% tolerance)  
Kit C324A-2 & B-2 (2% tolerance)
- 0603CT Series**  
Kit C423 (5% tolerance)  
Kit C423-2 (2% tolerance)
- 0603HC Series**  
Kit C339 (5% tolerance)
- 0603HL Series**  
Kit C449 (5% tolerance)
- 0603HP Series**  
Kit C406A & B (5% tolerance)  
Kit C406A-2 & B-2 (2% tolerance)
- 0603LS Series**  
Kit C347 (5% tolerance)
- 0604HQ High Q Series**  
Kit C351 (5% tolerance)
- 0805AF Series**  
Kit C450 (5% tolerance)
- 0805CS Series**  
Kit C303 (5% tolerance)  
Kit C303-2 (2% tolerance)
- 0805HP Series**  
Kit C477 (5% tolerance)  
Kit C477-2 (2% tolerance)
- 0805HQ High Q Series**  
Kit C325 (5% tolerance)
- 0805HT Series**  
Kit C321 (5% tolerance)
- 0805LS Series**  
Kit C354 (5% tolerance)
- 1008AF Series**  
Kit C414 (5% tolerance)
- 1008CS Series**  
Kit C300 (5% tolerance)  
Kit C300-2 (2% tolerance)

- 1008HQ High Q Serie**  
Kit C323 (5% tolerance)  
Kit C323-2 (2% tolerance)
- 1008HT Series**  
Kit C322 (5% tolerance)
- 1008LS Series**  
Kit C336 (5% tolerance)
- 1206CS Series**  
Kit C320 (5% tolerance)
- 1812CS Series**  
Kit C337 (5% tolerance)
- 1812LS Series**  
Kit C314 (5% tolerance)
- HA403x Series**  
Kit C458

### Air Core Inductors

- 0806SQ, 0807SQ, 0908SQ Square Series**  
Kit C424 (5% tolerance)  
Kit C424-2 (2% tolerance)
- 1010/1212/2014VS Series**  
Kit C456 (20% tolerance)
- 1111SQ Square Series**  
Kit C457 (5% tolerance)
- 1515SQ, 2222SQ, 2929SQ Square Series**  
Kit C438 (5% tolerance)  
Kit C438-2 (2% tolerance)
- GA309x High-Current Series**  
Kit C459
- Micro Spring™ Series**  
Kit C308 (5% tolerance)  
Kit C308-2 (2% tolerance)
- Mini Spring™ Series**  
Kit C302 (5% tolerance)  
Kit C302-2 (2% tolerance)
- Midi Spring® Series**  
Kit C318 (5% tolerance)  
Kit C318-2 (2% tolerance)
- Maxi Spring® Series**  
Kit C319 (5% tolerance)  
Kit C319-2 (2% tolerance)
- Low Profile Mini Spring™ Series**  
Kit C394 (5% tolerance)  
Kit C394-2 (2% tolerance)

### RFID Transponder Coils

- 5315TC Series**  
Kit C369
- 4308RV Series**  
Kit C383

### EMI/RFI Filters

- Common Mode Data Line EMI Filters**  
Kit D303
- USB 3.x / 2.0 Common Mode Chokes**  
Kit C470

### RF Transformers

- PWB Series Wideband RF Transformers**  
Kit C404
- WBC Series Wideband RF Transformers**  
Kit C393

### Unshielded Power Wafer® Inductors

- DO1605T Series**  
Kit C353
- DO1606T Series**  
Kit C338

- LPO2506 Series**  
Kit C332 (InBoard®)  
Kit C333 (On-board)
- LPO3010 Series**  
Kit C388
- LPO3310 Series**  
Kit C375
- LPO4812 Series**  
Kit C357
- LPO4815 Series**  
Kit C376
- LPO6013 Series**  
Kit C352
- LPO6610 Series**  
Kit C367

### Unshielded Power Inductors

- DO1607B Backlight Series**  
Kit C335
- DO1608C Series**  
Kit C377
- DO1813H High Current Series**  
Kit C331
- DO2010 Series**  
Kit C399
- DO3308P Series**  
Kit C309
- DO3314 Series**  
Kit C358
- DO3316H High Current Series**  
Kit C326
- DO3316P Series**  
Kit C378
- DO3316T High Temp Series**  
Kit C396
- DO3340P Series**  
Kit C310
- DO5010H High Current Series**  
Kit C355
- DO5022P Series**  
Kit C311

### Shielded Power Wafer® Inductors

- LPS30xx Shielded**  
Kit C392
- LPS3314 Series**  
Kit C330
- LPS40xx Series**  
Kit C401
- LPS4414 Series**  
Kit C340
- LPS30xx/40xx High L Series**  
Kit C402
- LPS5010 Series**  
Kit C407
- LPS5015 Series**  
Kit C350
- LPS5030 Series**  
Kit C420
- LPS6225 Series**  
Kit C349
- LPS6235 Series**  
Kit C345

### Shielded Power Inductors

- Coupled Inductors Essential Values**  
Kit C463
- DS1608B Backlight Series**  
Kit C334

- EPL2010 Series**  
Kit C412
- EPL2014 Series**  
Kit C413
- EPL3010 Series**  
Kit C431
- EPL3012 Series**  
Kit C437
- EPL3015 Series**  
Kit C405
- ME3215 Series**  
Kit C408
- ME3220 Series**  
Kit C386
- MLC Series**  
Kit C387
- MOS6020 Series**  
Kit C359
- MSD1278 Coupled Series**  
Kit C400
- MSS1038 Series**  
Kit C391
- MSS1048 Series**  
Kit C409
- MSS1246 Series**  
Kit C410
- MSS1246T High Temp Series**  
Kit C417
- MSS1260 Series**  
Kit C360
- MSS1260T Series**  
Kit C418
- MSS1278 Series**  
Kit C380
- MSS1278T High Temp Series**  
Kit C419
- MSS4020 Series**  
Kit C381
- MSS5121 Series**  
Kit C411
- MSS5131 Series**  
Kit C362
- MSS6122 Series**  
Kit C363
- MSS6132 Series**  
Kit C364
- MSS7341 Series**  
Kit C385
- PFL1609 & PFL2010 Series**  
Kit C433
- PFL2510 & PFL2512 Series**  
Kit C444
- PFL4514 & PFL4517 Series**  
Kit C451
- SER1052 High Current Series**  
Kit C421
- SER1360 High Current Series**  
Kit C365
- SER1400 High Current Series**  
Kit C427
- SER1590 High Current Series**  
Kit C366
- SER2000 High Current Series**  
Kit C374
- SLC7530 Series**  
Kit C379
- SLC/SLR Essential Values**  
Kit C467
- SRT8045 Series**  
Kit C469
- XAL & XFL (12 series)**  
42 parts: 1.0, 2.2, 3.3 & 4.7 µH  
Kit C454

- XAL1010 & XAL1060 High Current Series**  
Kit C435
- XAL40xx Series**  
Kit C429
- XAL50xx High Current Series**  
Kit C445
- XAL60xx High Current Series**  
Kit C442
- XAL7020 High Current Series**  
Kit C452
- XAL7030 High Current Series**  
Kit C441
- XAL7070 High Current Series**  
Kit C443
- XEL30xx Series**  
Kit C465
- XEL40xx Series**  
Kit C464
- XEL60xx Series**  
Kit C466
- XFL2005 Series**  
Kit C479
- XFL2006 Series**  
Kit C478
- XFL3010 & XFL3012 Series**  
Kit C440 \$125
- XFL4012 & XFL4015 Series**  
Kit C455
- XFL4020 Series**  
Kit C436
- XPL2010 Series**  
Kit C428
- XTL7030 Series**  
Kit C468

## Power Transformers

- CST Current Sensors**  
Kit C389
- PoE300F30 Watt Transformers**  
Kit C398
- PoE EP Transformers**  
Kit C395
- PoE Transformers**  
Kit C372
- Miniature PoE Transformers**  
Kit C382
- Planar Transformer Prototyping Kit**  
Kit C356
- PL140 Planar Transformers**  
Kit C390
- PL160/PL300 Planar Transformers**  
Kit C460

## TH Products

### RF Inductors

- 132, 148 Series Horizontal Mount Inductors**  
Kit M304
- "Slot Seven" 7 mm Tunable Inductors**  
Kit M106
- "Slot Ten" 10 mm Tunable Inductors**  
Kit M100
- "Unicoil" 7/10 mm Tunable Inductors**  
Kit M302
- "Unicoil" 5 mm Tunable Inductors**  
Kit M305

### EMI/RFI Filters

- Common Mode Data Line EMI Filters**  
Kit D303
- Common Mode Line Chokes**  
Kit P402

### Power Inductors


- DC1012 Series**  
Kit P410
- PCV Series Power Filter Chokes**  
Kit P405
- PCH27, 45 Series Axial Lead Power Chokes**  
Kit P409

### Power Magnetics

- Current Sensors**  
Kit P403
- Base/Gate Driver Transformers**  
Kit P404



# Coilcraft®

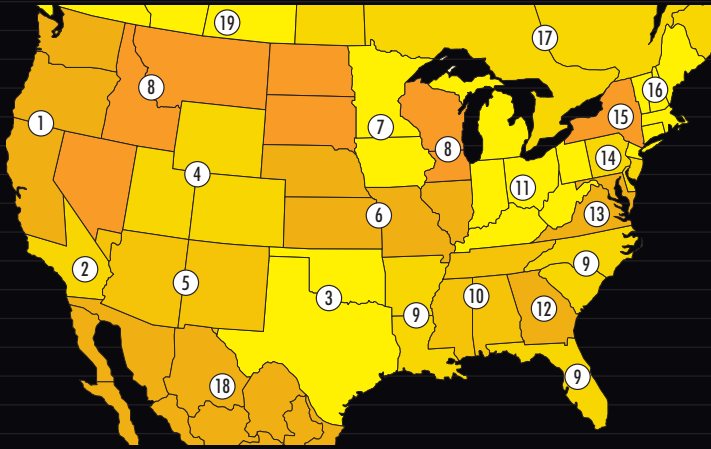

## North America Sales

- 1 Coilcraft 800-318-9491 [dblair@coilcraft.com](mailto:dblair@coilcraft.com)
- 2 Stewart Marketing 949-709-4897 [steve@stewartmarketinginc.com](mailto:steve@stewartmarketinginc.com)
- 3 Coilcraft 847-516-7379 [ndarr@coilcraft.com](mailto:ndarr@coilcraft.com)
- 4 English Damco 303-695-0706 [sales@englishdamco.com](mailto:sales@englishdamco.com)
- 5 O'Donnell Assoc. AZ 602-896-9449 [donna@odonnellsw.com](mailto:donna@odonnellsw.com)  
NM 915-778-2581 [esther@odonnellsw.com](mailto:esther@odonnellsw.com)
- 6 Lorenz Sales 913-469-1312 [dnelson@lorenzsales.com](mailto:dnelson@lorenzsales.com)
- 7 LTM Sales 319-431-5825 [ltmsales1@gmail.com](mailto:ltmsales1@gmail.com)
- 8 Coilcraft 847-516-7424 [jrogers@coilcraft.com](mailto:jrogers@coilcraft.com)
- 9 Coilcraft 336-449-5927 [gmatthews@coilcraft.com](mailto:gmatthews@coilcraft.com)
- 10 Millennium Sales 256-461-8655 [millenn@hiwaay.net](mailto:millenn@hiwaay.net)
- 11 Schillinger Associates 765-457-7241  
[des.schillinger@sai-rep.com](mailto:des.schillinger@sai-rep.com)
- 12 Jettco & Associates 770-534-1009 [jjett@jettco.com](mailto:jjett@jettco.com)
- 13 ATM Mid-Atlantic 301-371-7909 [bobb@atm-ma.com](mailto:bobb@atm-ma.com)
- 14 Parallax South 267-404-2993 [pconlan@parallaxsouth.com](mailto:pconlan@parallaxsouth.com)
- 15 Solutions in Business Marketing 585-398-7025  
[gleonard@sib-marketing.com](mailto:gleonard@sib-marketing.com)
- 16 Coilcraft 847-516-7417 [jneumann@coilcraft.com](mailto:jneumann@coilcraft.com)
- 17 Starvoy Technologies 613-592-8910 [sales@starvoy.com](mailto:sales@starvoy.com)
- 18 OAS de Mexico +52 33 3122 0788 [carlos@odonnellsw.com](mailto:carlos@odonnellsw.com)
- 19 Coilcraft 847-516-7406 [mbrownstein@coilcraft.com](mailto:mbrownstein@coilcraft.com)

## Sales Headquarters

**North America** [info@coilcraft.com](mailto:info@coilcraft.com)  
847-639-6400 Fax 847-639-1469

**Europe** [sales@coilcraft-europe.com](mailto:sales@coilcraft-europe.com)  
+44-1236-730595 Fax +44-1236-730627

**Hong Kong** [ellaleung@coilcraft-hk.com](mailto:ellaleung@coilcraft-hk.com)  
+852-2385-5783 Fax +852-2770-0729

**India** [saras@coilcraft.com.sg](mailto:saras@coilcraft.com.sg)  
+91-44 4230 7308 / +91-44 4230 7306

**Japan** [mshibuya@coilcraft.co.jp](mailto:mshibuya@coilcraft.co.jp)  
+81-427-20-5404 Fax +81-427-20-5405

**Malaysia** [stephen\\_lim@coilcraft.com.sg](mailto:stephen_lim@coilcraft.com.sg)  
+60-4 6586144 Fax +60-4 659 5144

**PRC** [sales@coilcraft.com.cn](mailto:sales@coilcraft.com.cn)  
+86-021-6218 8074 Fax +86-021-6218 9728

**Singapore** [tchoo@coilcraft.com.sg](mailto:tchoo@coilcraft.com.sg)  
+65-6484 8412 Fax +65-6484 8443

**Taiwan** [winson@coilcraft.com.tw](mailto:winson@coilcraft.com.tw)  
+886-2-2264 3646 Fax +886-2-2270 0294

## International Sales

**Australia** Tri Components Pty Ltd

**Brasil** Aplicações Eletrônicas Artimar

**Israel** Elina Electronics

**Japan** Fuji Electronics,  
Global Electronics, Corp.  
M-RF Co., Ltd.  
NEXTY Electronics Corp.  
Sankyo Co., Ltd.  
SISTEC Co., Ltd.

**Korea** Tammy's Trading Corporation

**South Africa** RF Design

## Authorized Distributor





## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Inductor Kits & Accessories](#) category:*

*Click to view products by [Fluke](#) manufacturer:*

Other Similar products are found below :

[CCCM453232-LAB1](#) [3650/0805LABKIT](#) [CM/CMH322522-LAB1](#) [EMINLKIT](#) [CLI-EFD15](#) [WZ 7342](#) [B82498X001](#) [EKDMGN08A-KIT](#)  
[EKDMGN011-KIT](#) [HCTI-HCTC-KIT](#) [EKDMGN010-KIT](#) [EKDMAT02-KIT](#) [EKDMGN09-KIT](#) [C483](#) [C480](#) [DK0051](#) [EKDMAT04-KIT](#)  
[HCTC-KIT](#) [CP-P36/22-2S](#) [CPV-RM12/I-1S-12PD-TZ](#) [TSTH-MM](#) [TSTH-MS](#) [TTH 50-150](#) [31743](#) [WE-1413H](#) [WE-1952V](#) [WE-237](#) [WE-](#)  
[279](#) [WE-2886H](#) [WE-3017V](#) [WE-3671H](#) [WE-3683H](#) [WE-3686](#) [WE-3693](#) [WE-3698H](#) [WE-3759](#) [CPHS-EFD20/7-1S-10P](#) [E-30-K-H-14P-SS-](#)  
[B66232B](#) [E65-54-K-H](#) [EE13-K-H-8P-SW](#) [EE13-K-V-10P-SW](#) [EE25\\_10\\_6-K-V-10P-YW-360](#) [EF12.6-K-H-9P-P1212](#) [EF16-K-H-8P](#) [EF16-](#)  
[K-H-9P-SW](#) [EF20-K-H-8P](#) [EFD12\\_3.5-K-1S-8P-CPHS](#) [EFD15-K-10P-4S](#) [EFD25-K-10P-WZ7855](#) [EFD25-K-12P-P2578](#)