

**AUXILIARY SWITCH NHI-PKZ0**

**Part no.** NHI11-PKZ0

**Article no.** 072896



For motor-protective circuit-breakers

**Delivery programme**

Contacts			
N/O = Normally open			1 N/O
N/C = Normally closed			1 N/C
Contact diagram			
Contact sequence			
Connection technique			Screw terminals
For use with			<p>PKZM01#<a href="http://ecatalog.moeller.net/catalog?pg=Motorschuttschalter&amp;filter=Zubeh%2525C3%2525B6r%253DNormalhilfsschalter%26Sortiment%253DZusatzausr%2525C3%2525BCstung&amp;l=de_DE">http://ecatalog.moeller.net/catalog?pg=Motorschuttschalter&amp;filter=Zubeh%2525C3%2525B6r%253DNormalhilfsschalter%26Sortiment%253DZusatzausr%2525C3%2525BCstung&amp;l=de_DE</a></p> <p>PKZM0#<a href="http://ecatalog.moeller.net/catalog?pg=Motorschuttschalter&amp;filter=Zubeh%2525C3%2525B6r%253DNormalhilfsschalter%26Sortiment%253DZusatzausr%2525C3%2525BCstung&amp;l=de_DE">http://ecatalog.moeller.net/catalog?pg=Motorschuttschalter&amp;filter=Zubeh%2525C3%2525B6r%253DNormalhilfsschalter%26Sortiment%253DZusatzausr%2525C3%2525BCstung&amp;l=de_DE</a></p> <p>PKZM4#<a href="http://ecatalog.moeller.net/catalog?pg=Motorschuttschalter&amp;filter=Zubeh%2525C3%2525B6r%253DNormalhilfsschalter%26Sortiment%253DZusatzausr%2525C3%2525BCstung&amp;l=de_DE">http://ecatalog.moeller.net/catalog?pg=Motorschuttschalter&amp;filter=Zubeh%2525C3%2525B6r%253DNormalhilfsschalter%26Sortiment%253DZusatzausr%2525C3%2525BCstung&amp;l=de_DE</a></p> <p>PKZM0-T#<a href="http://ecatalog.moeller.net/catalog?pg=Motorschuttschalter&amp;filter=Zubeh%2525C3%2525B6r%253DNormalhilfsschalter%26Sortiment%253DZusatzausr%2525C3%2525BCstung&amp;l=de_DE">http://ecatalog.moeller.net/catalog?pg=Motorschuttschalter&amp;filter=Zubeh%2525C3%2525B6r%253DNormalhilfsschalter%26Sortiment%253DZusatzausr%2525C3%2525BCstung&amp;l=de_DE</a></p> <p>PKM0#<a href="http://ecatalog.moeller.net/catalog?pg=Motorschuttschalter&amp;filter=Zubeh%2525C3%2525B6r%253DNormalhilfsschalter%26Sortiment%253DZusatzausr%2525C3%2525BCstung&amp;l=de_DE">http://ecatalog.moeller.net/catalog?pg=Motorschuttschalter&amp;filter=Zubeh%2525C3%2525B6r%253DNormalhilfsschalter%26Sortiment%253DZusatzausr%2525C3%2525BCstung&amp;l=de_DE</a></p> <p>PKZ-Grundgerät#<a href="http://ecatalog.moeller.net/catalog?pg=Motorschuttschalter&amp;filter=Zubeh%2525C3%2525B6r%253DNormalhilfsschalter%26Sortiment%253DZusatzausr%2525C3%2525BCstung&amp;l=de_DE">http://ecatalog.moeller.net/catalog?pg=Motorschuttschalter&amp;filter=Zubeh%2525C3%2525B6r%253DNormalhilfsschalter%26Sortiment%253DZusatzausr%2525C3%2525BCstung&amp;l=de_DE</a></p>


**Notes**

Can be fitted to the right of motor-protective circuit-breakers, transformer-protective circuit-breakers, motor-protective circuit-breakers for starter combinations.

Can be combined with:

AGM, NHI-E-... trip-indicating auxiliary contact

**Notes**




**Accessories**

- 1 Motor-protective circuit-breakers # 072730
- 5 Trip-indicating auxiliary contact # 072898
- Additional accessories # 106132

## Auxiliary contacts

Rated impulse withstand voltage	$U_{imp}$	V AC	6000
Overvoltage category/pollution degree			III/3
Rated operational voltage	$U_e$	V	
	$U_e$	V AC	500
	$U_e$	V DC	250
Safe isolation to VDE 0106 Part 101 and Part 101/A1			
Between auxiliary contacts and main contacts		V AC	690
Rated operational current	$I_e$	A	
AC-15			
220 – 240 V	$I_e$	A	3.5
380 – 415 V	$I_e$	A	2
440 – 500 V	$I_e$	A	1
DC-13 L/R – 100 ms			
24 V	$I_e$	A	2
60 V	$I_e$	A	1.5
110 V	$I_e$	A	1
220 V	$I_e$	A	0.25
Lifespan		S	
Lifespan, mechanical	Operations	$\times 10^6$	$\geq 0.1$
Lifespan, electrical	Operations	$\times 10^6$	0.05
Control circuit reliability (at $U_e = 24$ V DC, $U_{min} = 17$ V, $I_{min} = 5.4$ mA)	Failure rate	#	$\leq 10^{-8}$ ; 1 failure at $1 \times 10^8$ operations
Interlocked opposing contacts to ZH 1/457			Yes
Short-circuit rating without welding			
deltaEK			FAZ-B4/1-HI
Fuse		A gG/gL	10
<b>Terminal capacities</b>			
Solid or flexible conductor with ferrule		mm <sup>2</sup>	0.75 – 2.5
Solid or stranded		AWG	18 – 14

## Dimensions

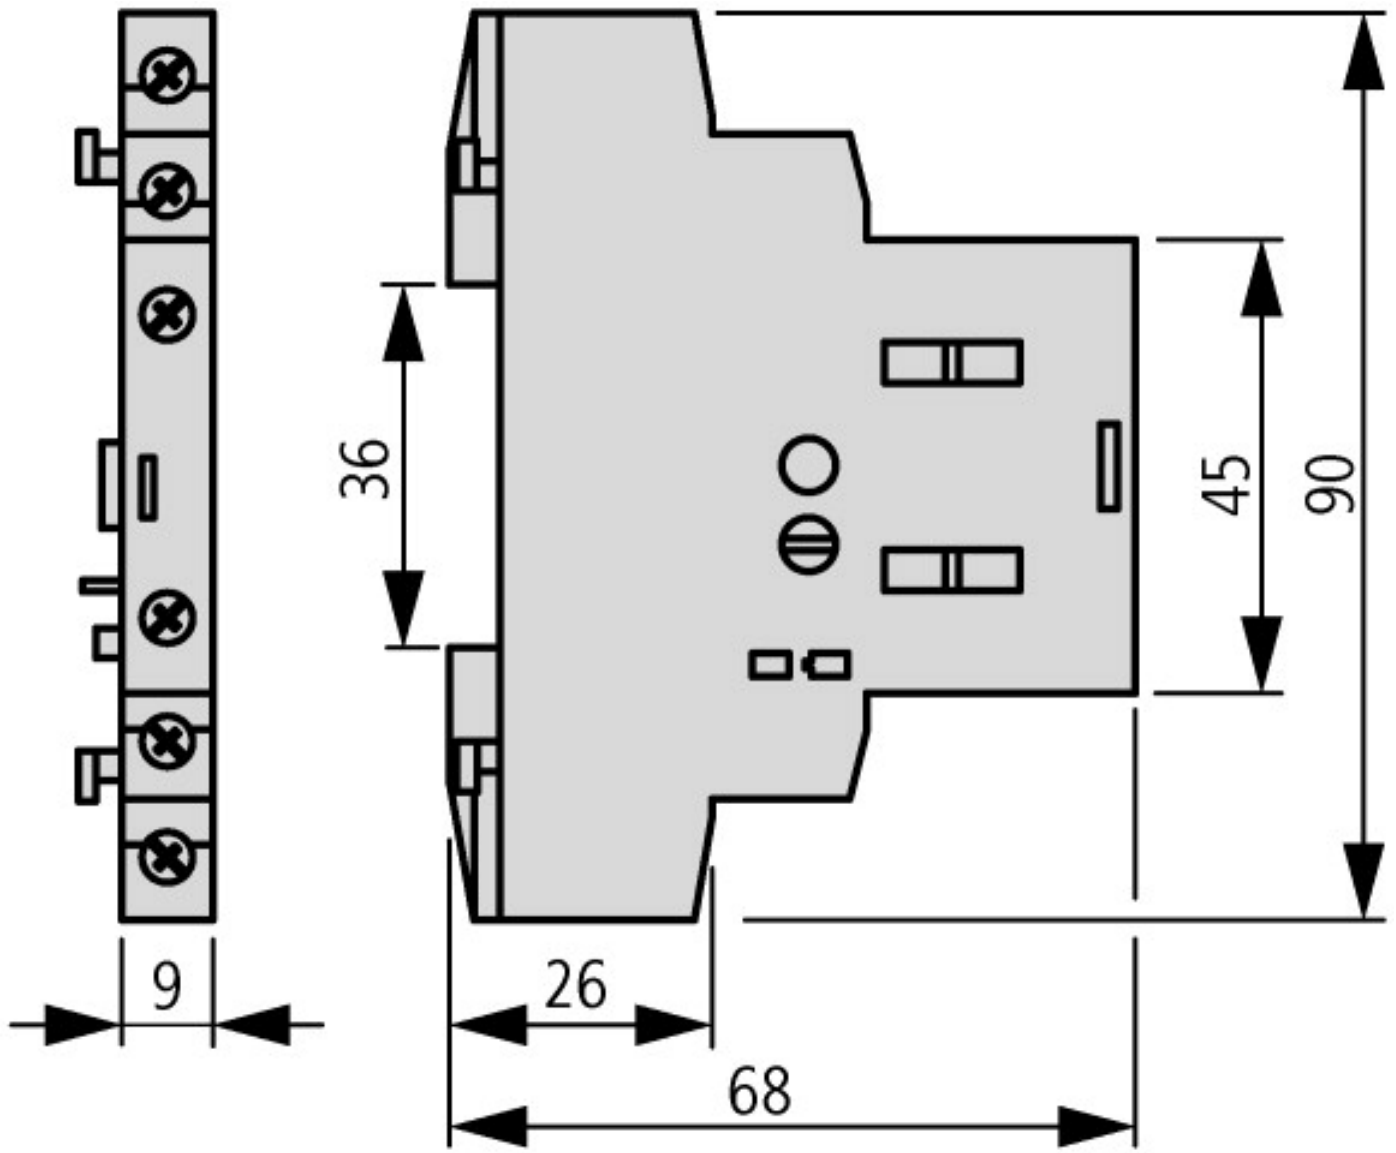

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Switch Hardware](#) category:*

*Click to view products by [Eaton](#) manufacturer:*

Other Similar products are found below :

[893102000](#) [LZZ1A](#) [0098.9234](#) [61-9707.7](#) [61-9771.0](#) [M2PA-5011](#) [635401](#) [6PA104](#) [6PA113](#) [6PA147-E6](#) [6PA148-E6](#) [6PA32](#) [6PA9](#) [700106](#)  
[700109](#) [700201A56](#) [700303A56](#) [700701264](#) [700C1GRY](#) [700C2GRN](#) [704-6001](#) [704.960.4](#) [704.960.9](#) [704.965.1](#) [704.965.2](#) [704.965.6](#)  
[704.966.0](#) [7089-3](#) [71M1048](#) [757200264](#) [778000A56](#) [79215938](#) [MHU35](#) [MHU37](#) [825.003.011](#) [825.005.011](#) [825.053.011](#) [825.055.011](#)  
[826.000.071](#) [827.020.011](#) [827.400.021](#) [835.900.023](#) [MML52C10C](#) [MML52E10C](#) [MML72EEK](#) [MML92HGH](#) [MML93K](#) [84211M02CNNS](#)  
[84211M02LGRS](#) [84211M02LNNX3](#)