



PAC2 POWER CONTROLLER

PAC2
X10461

INTRODUCTION

The PAC module is a high power, full wave AC Phase Angle Controller in a compact package. It is capable of regulating up to 6KW (25A) 230V ac. The PAC2 regulator governs the amount of power supplied to the load, by controlling the phase angle of the AC supply. The low thermal impedance and high electrical isolation provides the equipment designer with a greater flexibility in a wide variety of applications.

APPLICATIONS

Suitable for most power control applications such as infra/red quartz and ceramic heaters and lighting. It can also be used on inductive loads such as transformers and ac motors.


FEATURES

- Solid state reliability.
- S.M.T
- Simple wiring.
- Rugged and compact
- High current capability.
- Internal snubber.


RoHS Compliant
Directive
2002/95/EC



INSTALLATION

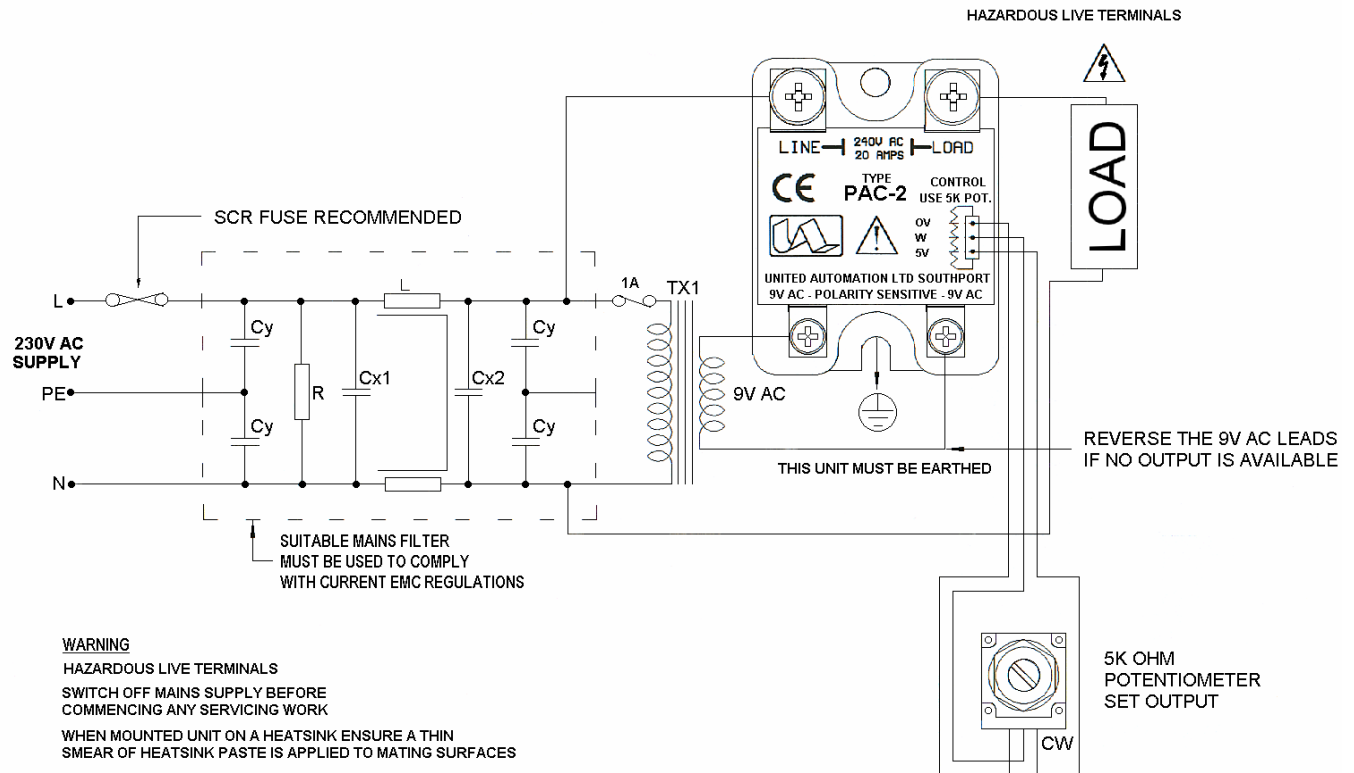

INSTALLATION

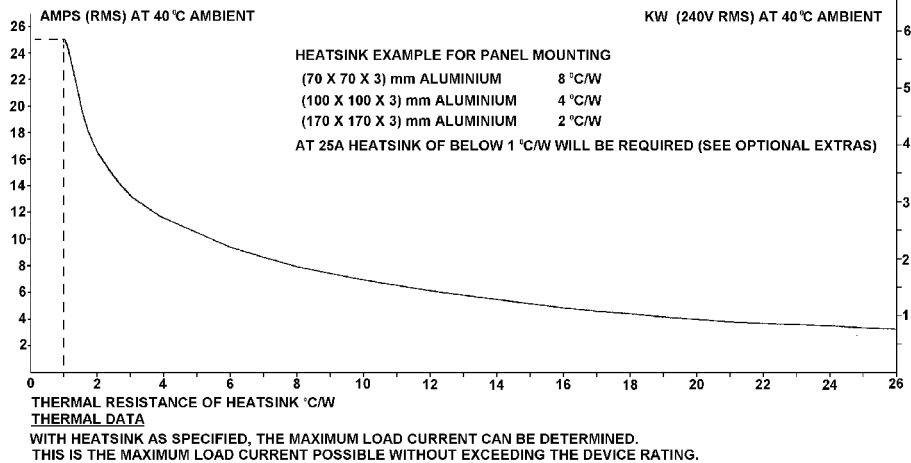

SPECIFICATIONS

AC line voltage	230V +/- 10% @ 50/60 Hz	AC Aux input supply	10V ac @ 50mA
Unit limiting RMS current	25A	I ² t for fusing	250 A ² s
Peak one cycle surge (10ms)	250A	Max peak voltage	600Vac
Minimum operating current	0.05A	Leakage current	5mA
Isolation voltage	3500Vrms	Control Signal	0-5v / 5v Aux O/P
Power terminals	M5 x 10mm	Power consumption	1.2 watts
Recommended Potentiometer	5K 1W	Weight	63g
Storage temperature	-20°C to +85°C	Maximum operating temperature	65°C

FUSING

It is recommended that semiconductor, fast acting type fuses or circuit breakers (Semiconductor - MCB) be used for unit protection and an appropriate safety fuse for unit supply (F1A). On initial operation some loads may need an increased factor of safety (F of S) for unit and/or device protection. See SRA Data/sheet for further information.

CE MARKING

This product family carries a "CE" marking. These phase angle controllers need a suitable remote filter. For information see recommendation section and contact our sales desk. See Declaration of Conformity.

RECOMMENDATIONS

Other documents, which may be appropriate for your application, are available on request:

CODE	IDENTITY	DESCRIPTION
X10229	RFI	Filter recommendations: Addressing the EMC Directive
X10213	ITA	Interaction: Uses for phase angle and for burst fire control.
X10255	SRA (LVD)	Safety requirements: Addressing the Low Voltage Directive including, Thermal data/cooling, Live parts warning, Earth requirements and fusing recommendations.
AP02/4	COS	UAL Conditions of sale.

NOTE: It is recommended that installation and maintenance of this equipment should be carried out by suitably qualified/trained personnel with reference to the current edition of the I.E.E. wiring regulations (BS7671). The regulations contain important requirements regarding the safety of electrical equipment. For International Standards refer to I.E.C. directive IEC 950.

ORDER CODE

State part number:

PAC2

Optional extras include: Potentiometer, Filter, Heatsink paste, and Heatsink assembly



UNITED AUTOMATION LIMITED

1 Southport Business Park
Kew
Southport, PR8 4HQ
ENGLAND

Tel: 0044 (0) 1704 – 516500 Main
Tel: 0044 (0) 1704 – 516516 Sales
Fax: 0044 (0) 1704 – 516501
Enquiry@united-automation.com
www.united-automation.com
Date 03/07/01

Page No. 2 of 2 Issue 2



This document was created with Win2PDF available at <http://www.daneprairie.com>.
The unregistered version of Win2PDF is for evaluation or non-commercial use only.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [united automation manufacturer](#):

Other Similar products are found below :

[F175-25A](#) [QVR-230](#) [SSC-25](#) [QVR-TB-RFI](#) [CSR604A](#) [PAC2](#) [CSR1004A](#) [AFM-11](#) [DCM-24-40](#) [CSR1504A](#) [QVR/S-RFI 17](#) [PSR-25](#)