

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL


FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

5XE18

FORMTEK
 FO-50378-1A
 DRAWN
 RER 3 APR 70
 CHECK DAW 6 APR 70
 EWP 6 APR 70
 CHECK
 ISSUE 45
 X 6
 3
 DRAWING NUMBER
 M
 5XE18
 PAGE 1 OF 1
 PR-4927
 RELEASE NO.
 REPLACES

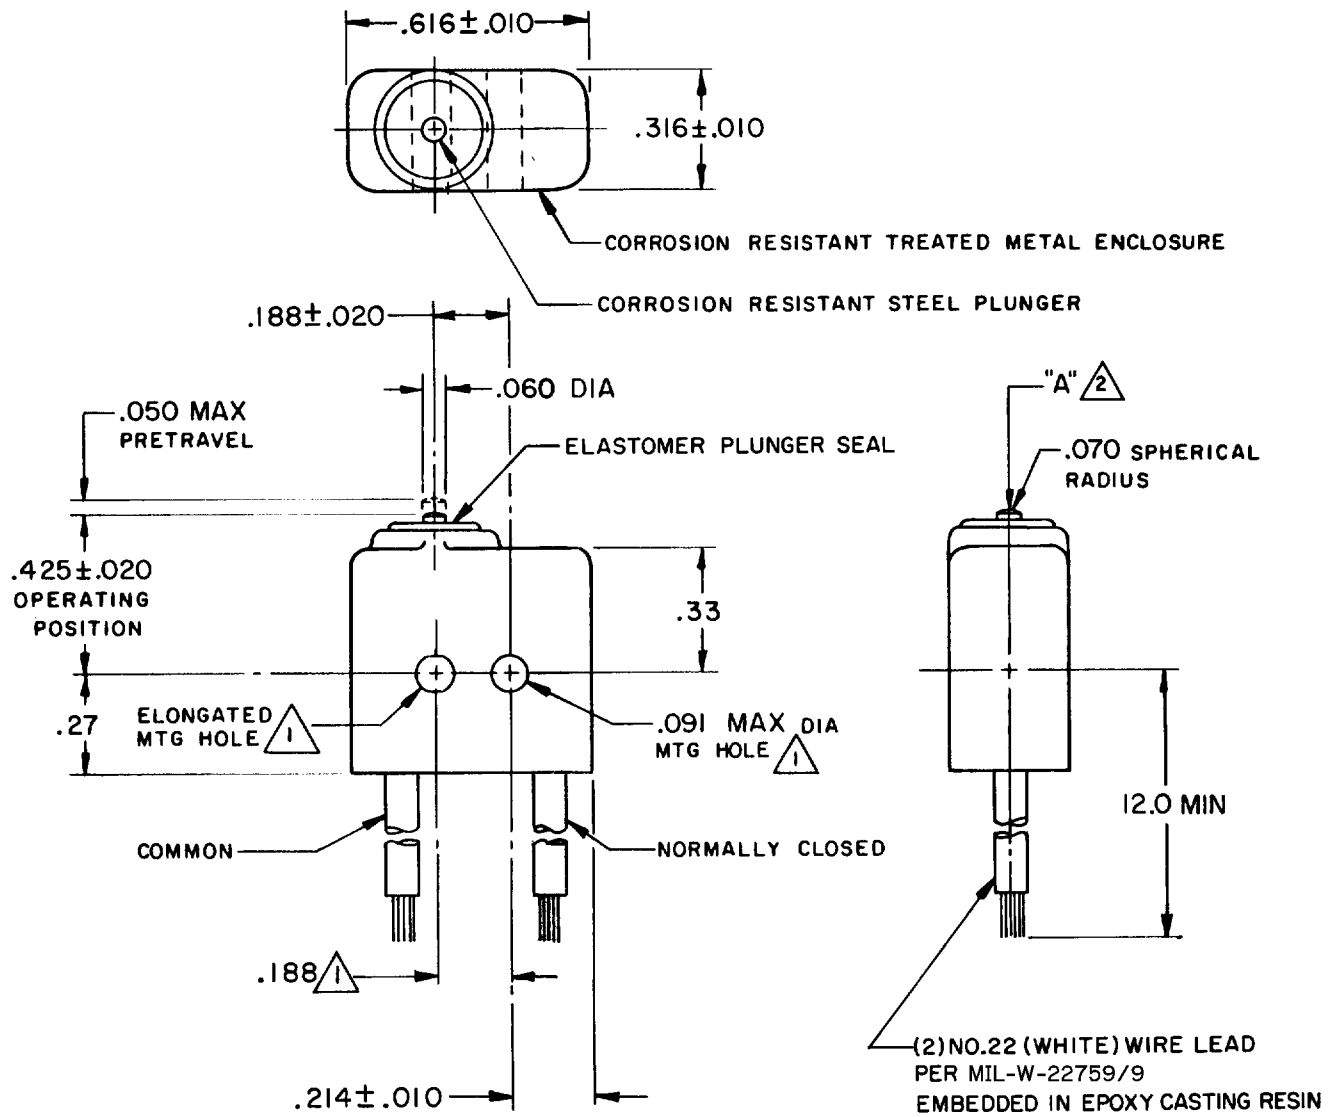

NOTE -

- 1 MOUNTING HOLES WILL ACCEPT .087 MAX DIA PINS OR SCREWS ON .188 ± .002 CENTERS
- 2 ACTUATION IN LINE WITH ARROW "A" IS RECOMMENDED
- 3 WEIGHT OF SWITCH ONLY IS .16 OZ MAX. WEIGHT OF SWITCH WITH WIRE LEADS IS .55 OZ MAX

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

| CHARACTERISTICS | |
|---------------------|----------|
| OPERATING FORCE | 5-17 OZ |
| RELEASE FORCE | 4 OZ MIN |
| RELEASE TRAVEL | .004 MIN |
| DIFFERENTIAL TRAVEL | .005 MAX |
| OVERTRAVEL | .004 MIN |

| ELECTRICAL DATA | |
|--------------------------------|--|
| CONTACT ARRANGEMENT S P N C | |
| 28 VOLTS DC RATING | |
| INDUCTIVE | SEA LEVEL -- 4 AMP 50,000 FT -- 2.5 AMP |
| RESISTIVE | SEA LEVEL -- 7 AMP 50,000 FT -- 7 AMP |
| MAXIMUM INRUSH | 24 AMP |

| SCALE 2 TO 1 | |
|--|-------|
| DO NOT SCALE PRINT | |
| UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES | |
| TOLERANCES ARE: | |
| ONE PLACE (.0) | ±.030 |
| TWO PLACE (.00) | ±.015 |
| THREE PLACE (.000) | ±.005 |
| ANGLES | ± |
| WEIGHT | 3 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Basic / Snap Action Switches](#) category:

Click to view products by [Honeywell](#) manufacturer:

Other Similar products are found below :

[83228001](#) [01.098.1358.1](#) [602EN1-6B](#) [602EN532](#) [602EN535-RB](#) [602HE5-RB1](#) [604HE162](#) [604HE223-6B](#) [624HE17-RB](#) [6HM89](#) [6PA78-JM](#)
[6SE1](#) [6SX1-H58](#) [70500840](#) [MBD5B1](#) [MBH2731](#) [73-316-0012](#) [79211759](#) [79211923](#) [79218589](#) [7AS12](#) [ML-1155](#) [ML-1376](#) [831010C3.0](#)
[831060C3.TL](#) [831090C2.EL](#) [83131904](#) [84212012](#) [8AS239](#) [8HM73-3](#) [903VB1-PG](#) [914CE1-6G](#) [PL-100](#) [11SM1077-H4](#) [11SM1077-H58](#)
[11SM1-TN107](#) [11SM405](#) [11SM703-T](#) [11SM8423-H2](#) [11SX37-T](#) [11SX48-H58](#) [11SX55-H58](#) [11SM2442-T](#) [11SM76-T](#) [11SM77-H58](#)
[11SM77-T](#) [11SM863-T](#) [11SM866](#) [11SX47-H58](#) [A7CN-1M-1-LEFT](#)