



# System and Handling Push-Wire Connectors for Junction Boxes, Series 773

## Stripped length

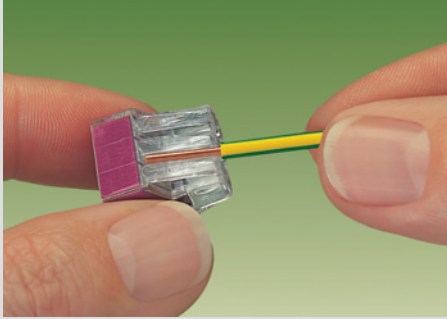


Strip solid conductor to 12 mm / 0.47 in


## Push-wire connection

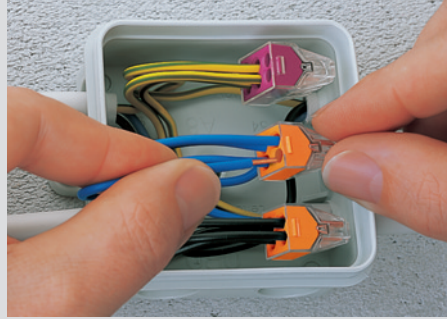


Connection: Insert stripped solid conductor FULLY

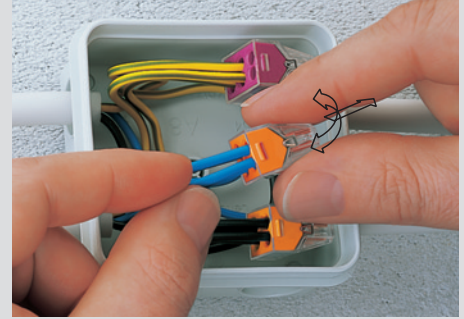

Removal: Hold wire to be removed and twist alternately left and right while pulling the connector

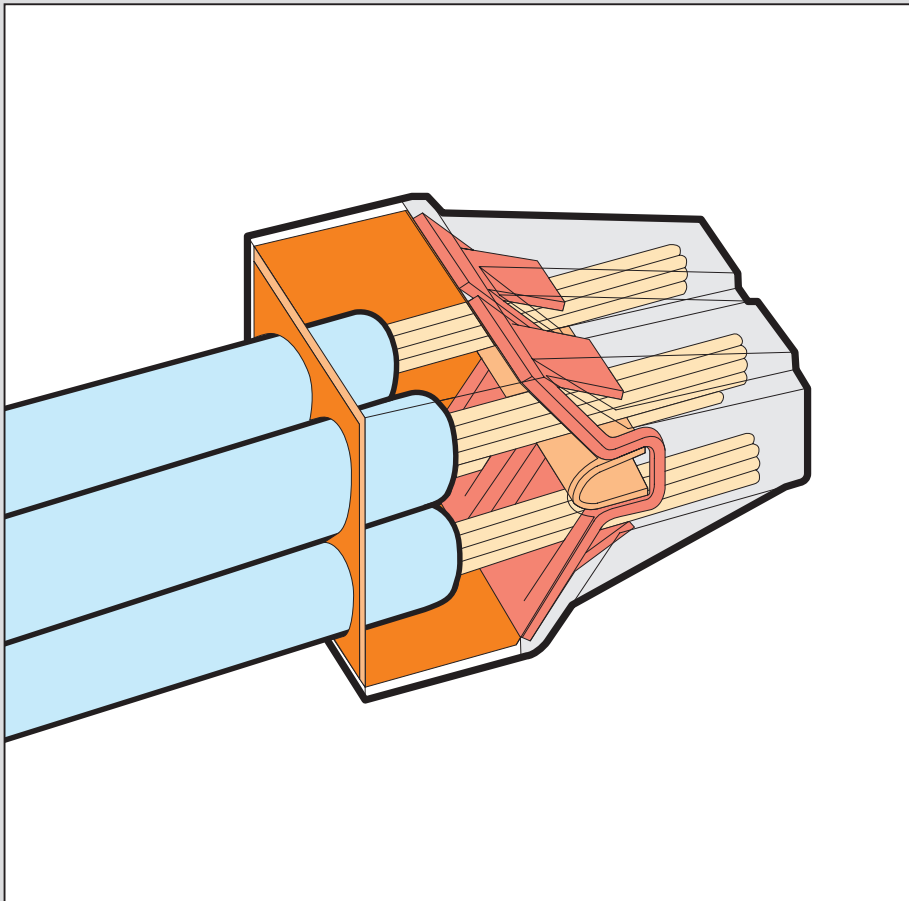

## Stranded conductors

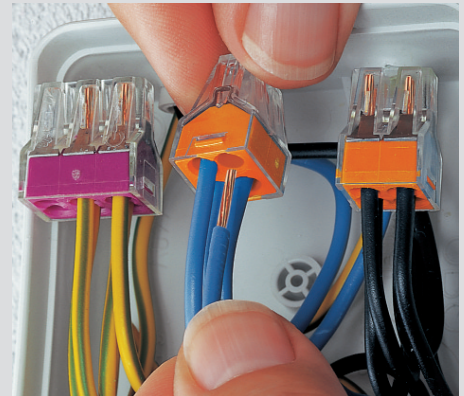


Connection: Insert stripped stranded conductor FULLY

## Testing



Testing


## Applications

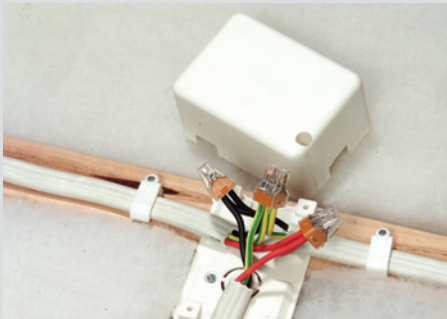

Push-wire connectors used in a junction box. (Australia)



Push-wire connectors used in a junction box. (Japan)

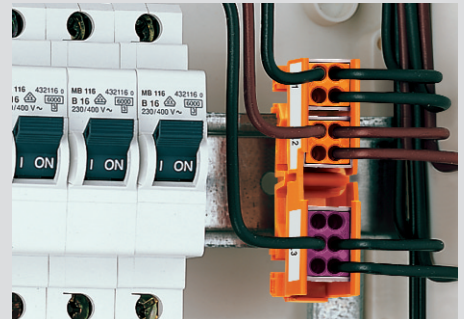


Fixing carrier

The push-wire connection clamps the following copper wires:




solid





stranded

# Push-Wire Connectors for Junction Boxes Series 773





8  
3

<p>2 x 0.75 – 2.5 mm<sup>2</sup><sub>s</sub><sup>st</sup> 2 x 1.5 – 2.5 mm<sup>2</sup><sub>s</sub><sup>st</sup> 400 V / 4 kV / 2** 24 A</p> <p>12 mm / 0.47 in</p> <p>* </p>	<p>2 x AWG 18 – 12 "sol." 2 x AWG 16 – 12 "str." 600 V, 20 A </p>	<p>4 x 0.75 – 2.5 mm<sup>2</sup><sub>s</sub><sup>st</sup> 4 x 1.5 – 2.5 mm<sup>2</sup><sub>s</sub><sup>st</sup> 400 V / 4 kV / 2** 24 A</p> <p>12 mm / 0.47 in</p> <p>* </p>	<p>4 x AWG 18 – 12 "sol." 4 x AWG 16 – 12 "str." 600 V, 20 A </p>	<p>Carrier for push-wire connectors</p> <p>Carrier width 18 mm / 0.71 in</p>
--	---	--	---	--






Colour	Item No.	Pack.-unit pcs	Colour	Item No.	Pack.-unit pcs	Colour	Item No.	Pack. unit pcs
Push-wire connectors for junction boxes ①, 2-conductor connectors, colour of housing transparent, colour of cover yellow			Push-wire connectors for junction boxes ①, 4-conductor connectors, colour of housing transparent, colour of cover orange			Fixing carrier for 4 push-wire connectors orange		
	773-102	1000 (10x100)		773-104	1000 (10x100)		773-332	50 (5 x 10)
						Marker strip, plain		
							243-110	1

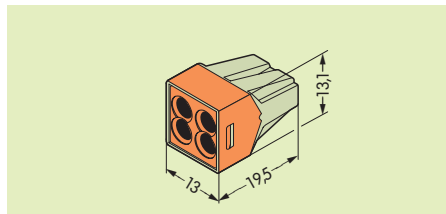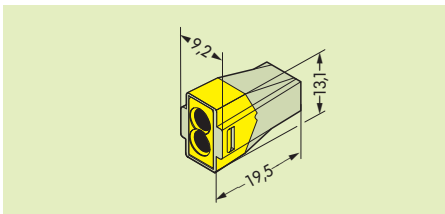

<p>6 x 0.75 – 2.5 mm<sup>2</sup><sub>s</sub><sup>st</sup> 6 x 1.5 – 2.5 mm<sup>2</sup><sub>s</sub><sup>st</sup> 400 V / 4 kV / 2** 24 A</p> <p>12 mm / 0.47 in</p> <p>* </p>	<p>6 x AWG 18 – 12 "sol." 6 x AWG 16 – 12 "str." 600 V, 20 A </p>	<p>8 x 0.75 – 2.5 mm<sup>2</sup><sub>s</sub><sup>st</sup> 8 x 1.5 – 2.5 mm<sup>2</sup><sub>s</sub><sup>st</sup> 400 V / 4 kV / 2** 24 A</p> <p>12 mm / 0.47 in</p> <p>* </p>	<p>8 x AWG 18 – 12 "sol." 8 x AWG 16 – 12 "str." 600 V, 20 A </p>	<p>3 x 2.5 – 6 mm<sup>2</sup><sub>s</sub> + st<sup>st</sup> 400 V / 4 kV / 2** 41 A</p> <p>12 – 13 mm / 0.53 in</p> <p>* </p>	<p>3 x AWG 14 – 10 "sol." + "str." 600 V, 30 A </p>
--	---	--	---	---	---



Colour	Item No.	Pack.-unit pcs	Colour	Item No.	Pack.-unit pcs	Colour	Item No.	Pack.-unit pcs
Push-wire connectors for junction boxes ①, 6-conductor connectors, colour of housing transparent, colour of cover violet			Push-wire connectors for junction boxes ①, 8-conductor connectors, colour of housing transparent, colour of cover dark grey			Push-wire connectors for junction boxes, 3-conductor connectors, colour of housing transparent, colour of cover red		
	773-106	500 (10 x 50)		773-108	500 (10 x 50)		773-173	500 (10 x 50)

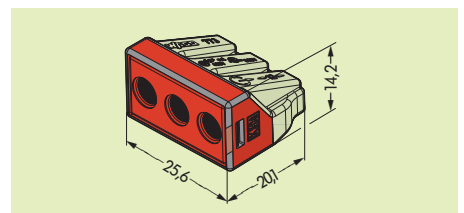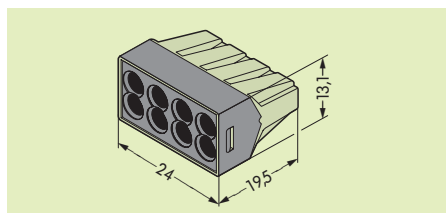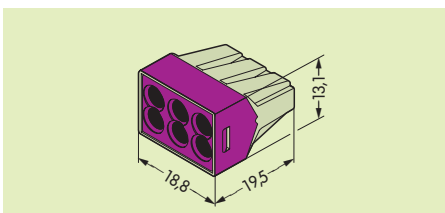

\* You can find approvals on the Internet at [www.wago.com](http://www.wago.com). \*\* In grounded (earthed) supply system  
 ① Also available for increased continuous service temperature of 120 °C Technical explanations and abbreviations see page 10.2.

8

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [wago manufacturer](#):*

Other Similar products are found below :

[750-460](#) [231-118/026-000](#) [231-303/026-000](#) [231-620/019-000](#) [257-403](#) [280-438](#) [280-831](#) [284-624](#) [210-111](#) [231-303/037-000](#) [231-446/001-000\\_NR](#) [232-216/026-000](#) [234-510](#) [264-726](#) [280-339](#) [0283-0671](#) [830-800/000-305](#) [750-512](#) [750-455](#) [51251782](#) [286-312](#) [713-1428/107-000](#) [731-138/048-000](#) [750-459](#) [750-517](#) [793-3505](#) [826-172](#) [859-304](#) [280-335](#) [231-535/001-000](#) [2604-1106](#) [2604-1504](#) [2606-1103/020-000](#) [2624-1103](#) [2626-3103/020-000](#) [713-1107](#) [852-1411](#) [2106-1307](#) [2116-5307](#) [832-1205](#) [832-3604](#) [2009-110](#) [281-512/281-501](#) [286-336](#) [750-421](#) [750-838](#) [753-559](#) [750-1505](#) [787-732](#) [753-437](#)