



ELECTRONICS, INC.
 44 FARRAND STREET
 BLOOMFIELD, NJ 07003
 (973) 748-5089

NTE261 (NPN) & NTE262 (PNP) Silicon Complementary Transistors Darlington Power Amplifier

Description:

The NTE261 (NPN) and NTE262 (PNP) are complementary silicon Darlington power transistors in a TO220 type package designed for general purpose amplifier and low-speed switching applications.

Features:

- High DC Current Gain: $h_{FE} = 2500$ Typ @ $I_C = 4A$
- Collector-Emitter Sustaining Voltage: $V_{CEO(sus)} = 100V$ Min @ 100mA
- Low Collector-Emitter Saturation Voltage:
 - $V_{CE(sat)} = 2V$ Max @ $I_C = 3A$
 - $= 4V$ Max @ $I_C = 5A$
- Monolithic Construction with Built-In Base-Emitter Shunt Resistor

Absolute Maximum Ratings:


Collector-Emitter Voltage, V_{CEO}	100V
Collector-Base Voltage, V_{CB}	100V
Emitter-Base Voltage, V_{EB}	5V
Collector Current, I_C	
Continuous	5A
Peak	8A
Base Current, I_B	120mA
Total Power Dissipation ($T_C = +25^\circ C$), P_D	65W
Derate Above $25^\circ C$	0.52W/ $^\circ C$
Total Power Dissipation ($T_A = +25^\circ C$), P_D	2W
Derate Above $25^\circ C$	0.016W/ $^\circ C$
Unclamped Inductive Load Energy (Note 1), E	50mJ
Operating Junction Temperature range, T_J	-65° to $+150^\circ C$
Storage Temperature Range, T_{stg}	-65° to $+150^\circ C$
Thermal Resistance, Junction-to-Case, R_{thJC}	1.92 $^\circ C/W$
Thermal Resistance, Junction-to-Ambient, R_{thJA}	62.5 $^\circ C/W$

Note 1. $I_C = 1A$, $L = 100mH$, P.R.F. = 10Hz, $V_{CC} = 20V$, $R_{BE} = 100\Omega$.

Electrical Characteristics: ($T_C = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
OFF Characteristics						
Collector–Emitter Sustaining Voltage	$V_{CEO(sus)}$	$I_C = 100\text{mA}$, $I_B = 0$, Note 2	100	–	–	V
Collector Cutoff Current	I_{CEO}	$V_{CE} = 50\text{V}$, $I_B = 0$	–	–	0.5	mA
	I_{CBO}	$V_{CB} = 100\text{V}$, $I_E = 0$	–	–	0.2	mA
Emitter Cutoff Current	I_{EBO}	$V_{BE} = 5\text{V}$, $I_C = 0$	–	–	2.0	mA
ON Characteristics (Note 2)						
DC Current Gain	h_{FE}	$I_C = 0.5\text{A}$, $V_{CE} = 3\text{V}$	1000	–	–	
		$I_C = 3\text{A}$, $V_{CE} = 3\text{V}$	1000	–	–	
Collector–Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 3\text{A}$, $I_B = 12\text{mA}$	–	–	2.0	V
		$I_C = 5\text{A}$, $I_B = 20\text{mA}$	–	–	4.0	V
Base–Emitter ON Voltage	$V_{BE(on)}$	$I_C = 3\text{A}$, $V_{CE} = 3\text{V}$	–	–	2.5	V
Dynamic Characteristics						
Small–Signal Current Gain	$ h_{fe} $	$I_C = 3\text{A}$, $V_{CE} = 4\text{V}$, $f = 1\text{MHz}$	4.0	–	–	
Output Capacitance NTE261	C_{ob}	$V_{CB} = 10\text{V}$, $I_E = 0$, $f = 0.1\text{MHz}$	–	–	300	pF
			NTE262	–	–	200

Note 2. Pulse Test: Pulse Width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$.

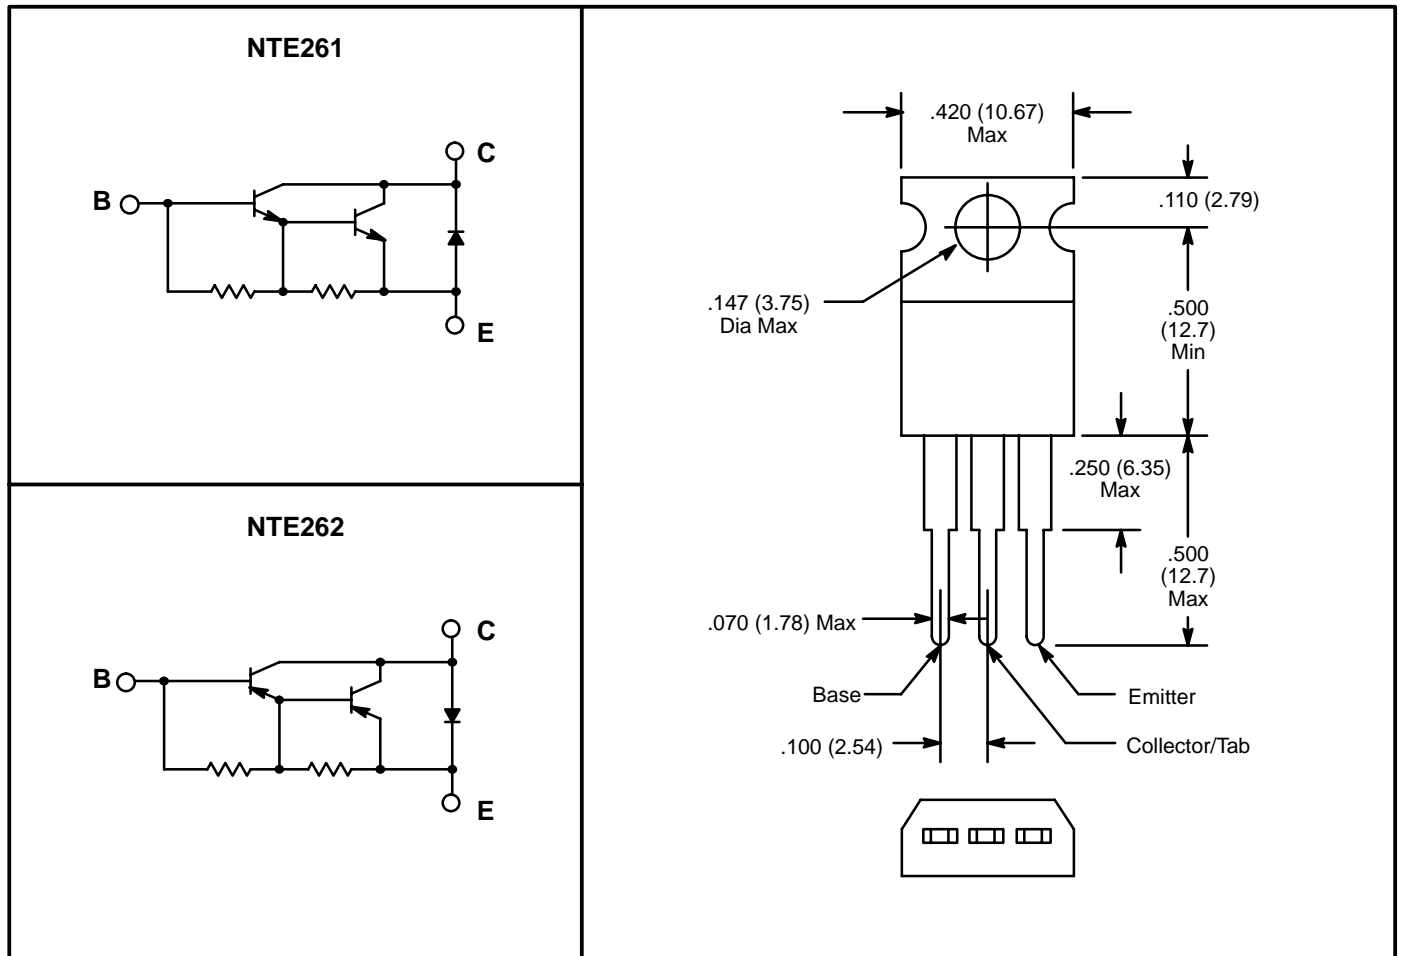

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Darlington Transistors](#) category:

Click to view products by [NTE manufacturer](#):

Other Similar products are found below :

[281287X](#) [SMMBT6427LT1G](#) [2N7371](#) [BDV64B](#) [JANTXV2N6287](#) [028710A](#) [SMMBTA64LT1G](#) [2N6350](#) [2SB1214-TL-E](#)
[SMMBTA14LT1G](#) [SBSP52T1G](#) [NJVMJD117T4G](#) [Jantx2N6058](#) [2N6353](#) [LB1205-L-E](#) [500-00005](#) [2N6053](#) [NJVMJD112G](#) [Jan2N6350](#)
[Jantx2N6352](#) [Jantx2N6350](#) [BULN2803LVS](#) [ULN2001N](#) [2SB1383](#) [2SB1560](#) [2SB852KT146B](#) [TIP112TU](#) [TIP122TU](#) [BCV27](#) [MMBTA13-](#)
[TP](#) [MMBTA14-TP](#) [MMSTA28T146](#) [BSP50H6327XTSA1](#) [KSH122TF](#) [NTE2557](#) [NJVNJD35N04T4G](#) [TIP115](#) [MPSA29-D26Z](#) [MJD127T4](#)
[FJB102TM](#) [BCV26E6327HTSA1](#) [BCV46E6327HTSA1](#) [BCV47E6327HTSA1](#) [BSP61H6327XTSA1](#) [BU941ZPFI](#) [2SB1316TL](#) [2SD1980TL](#)
[NTE2350](#) [NTE245](#) [NTE246](#)