



ELECTRONICS, INC.

44 FARRAND STREET
BLOOMFIELD, NJ 07003
(973) 748-5089

<http://www.nteinc.com>


NTE5309 thru NTE5311 Single Phase Bridge Rectifier 4 Amp

Features:

- Diffused Junction
- Low Forward Voltage Drop
- High Current Capability
- High Reliability
- High Surge Current Capability
- Ideal For Printed Circuit Boards

Maximum Ratings and Electrical Characteristics: ($T_A = +25^\circ\text{C}$ unless otherwise specified. Single Phase, Half Wave, 60Hz, Resistive or Inductive Load. For Capacitive Load, Derate Current by 20%)

Peak Repetitive Reverse Voltage, V_{RRM}	
NTE5309	200V
NTE5310	600V
NTE5311	1000V
Working Peak Reverse Voltage, V_{RWM}	
NTE5309	200V
NTE5310	600V
NTE5311	1000V
DC Blocking Voltage, V_R	
NTE5309	200V
NTE5310	600V
NTE5311	1000V
RMS Reverse Voltage, $V_{R(RMS)}$	
NTE5309	140V
NTE5310	420V
NTE5311	700V
Average Rectified Output Current ($T_C = +75^\circ\text{C}$), I_O	4A
Non-Repetitive Peak Forward Surge Current, I_{FSM}	
(8.3ms Single Half Sine-Wave Superimposed on Rated Load)	150A
Forward Voltage Drop (Per Bridge Element, $I_F = 2A$), V_{FM}	1.1V
Peak Reverse Current (at Rated DC Blocking Voltage per Element), I_R	
$T_C = +25^\circ\text{C}$	10 μ A
$T_C = +100^\circ\text{C}$	1mA
Rating fo Fusing ($t < 8.3\text{ms}$, Note 1), I^2t	166A ² s
Typical Thermal Resistance, Junction-to-Case (Note 2), R_{thJC}	19K/W
Operating Junction Temperature Range, T_J	-65° to +125°C
Storage Temperature Range, T_{stg}	-65° to +125°C

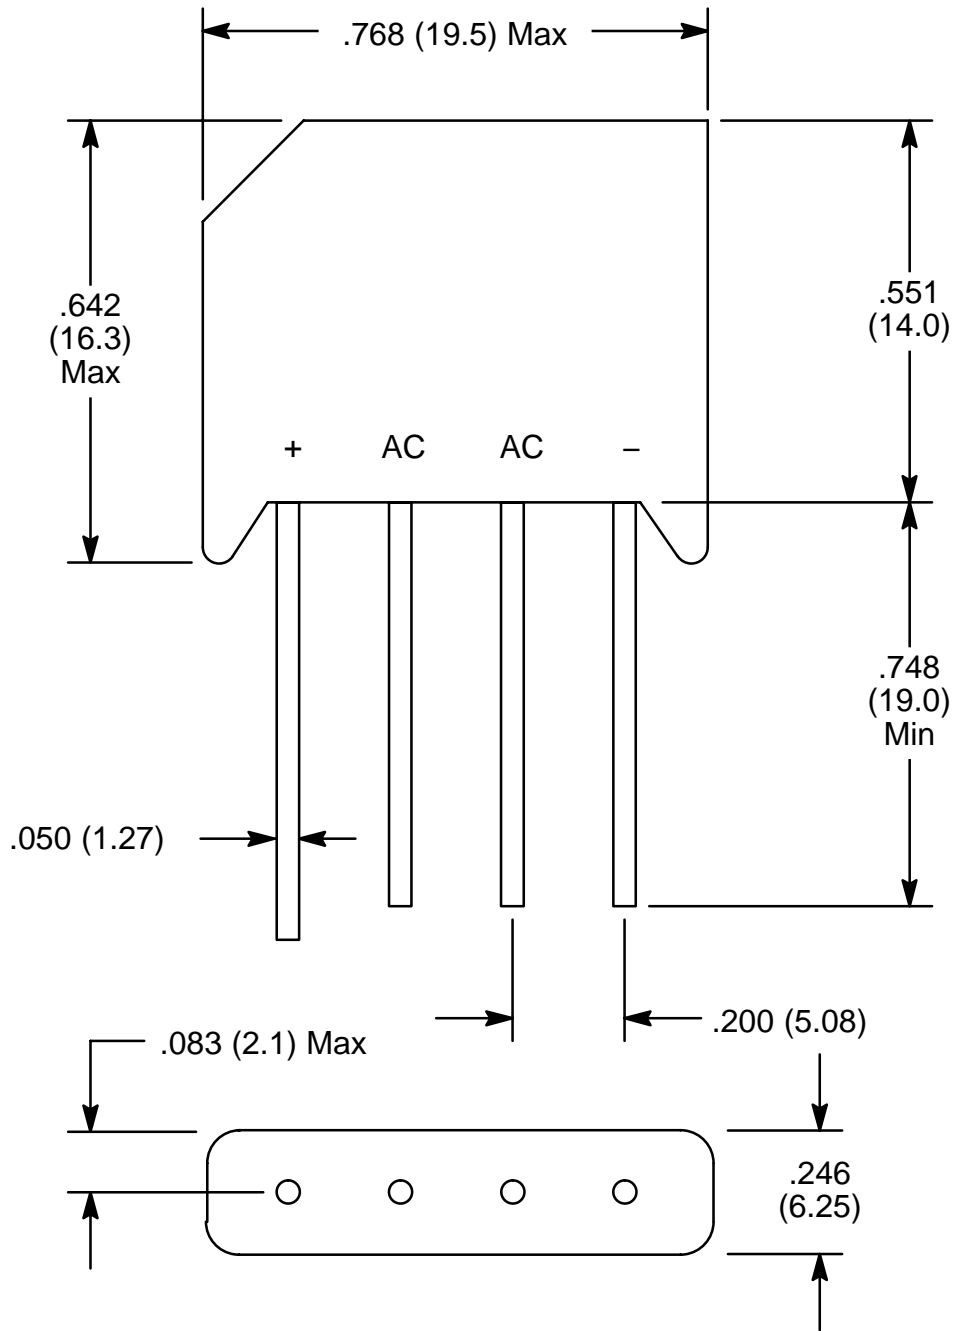

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bridge Rectifiers](#) category:

Click to view products by [NTE manufacturer](#):

Other Similar products are found below :

[G3SBA60-E351](#) [GBJ1504-BP](#) [GBU10B-BP](#) [GBU15J-BP](#) [GBU15K-BP](#) [GBU4A-BP](#) [GBU4D-BP](#) [GBU6B-E3/45](#) [GSIB680-E3/45](#) [DB101-BP](#) [DF10SA-E345](#) [RMB2S](#) [RCG](#) [APT30DF100HJ](#) [APT60DF20HJ](#) [B2S-E3/80](#) [BU1506-E351](#) [BU15085S-E345](#) [BU1508-E3/45](#) [BU1510-E3/45](#) [RS404GL-BP](#) [RS405GL-BP](#) [G3SBA20-E3/51](#) [G5SBA20-E3/51](#) [G5SBA60-E3/51](#) [GBJ1502-BP](#) [GBL02-E351](#) [GBL10-E3/45](#) [GBU10J-BP](#) [GBU4J-BP](#) [GBU4K-BP](#) [GBU8B-E3/45](#) [GBU8D-BP](#) [GBU8J-BP](#) [GSIB1520-E3/45](#) [MB1510](#) [MB352W](#) [MB6M-G](#) [B2M-E345](#) [B40C7000A](#) [B500C7000A](#) [MP5010W-BP](#) [MP501W-BP](#) [MP502-BP](#) [BR1005-BP](#) [BR101-BP](#) [BU1006-E345](#) [BU12065S-E3/45](#) [BU1508-E3/51](#) [BU2006-E3/45](#) [BU2008-E345](#)