



ELECTRONICS, INC.

44 FARRAND STREET  
 BLOOMFIELD, NJ 07003  
 (973) 748-5089  
<http://www.nteinc.com>

## NTE569 Silicon Rectifier Fast Switching, Soft Recovery

**Features:**


- Fast Recovery
- Diffused Junction
- High Surge Capability

**Absolute Maximum Ratings:**

Peak Recurrent and Non-Recurrent Reverse Voltage, $V_{RRM}$ .....	600V
Forward Current (R Load, $T_A = +50^\circ\text{C}$ ), $I_{F(AV)}$ .....	3A
Recurrent Peak Forward Current, $I_{FRM}$ .....	15A
Peak Forward Surge Current (10ms, $T_A = +25^\circ\text{C}$ ), $I_{FSM}$ .....	100A
Maximum Reverse Recovery Time ( $I_F = 0.5\text{A}$ to $I_R = 1\text{A}$ with $I_{rr} = 0.25\text{A}$ ), $t_{rr}$ .....	250ns
Maximum Operating Junction Temperature $T_J$ .....	+150°C
Storage Temperature Range, $T_{stg}$ .....	-65° to +150°C
Lead Temperature (During Soldering, 4mm from case, 3.5sec), $T_L$ .....	+350°C
Maximum Thermal Resistance, Junction-to-Case, $R_{thJC}$ .....	30°C/W

**Electrical Characteristics:** ( $T_A = +25^\circ\text{C}$  unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Maximum Forward Voltage Drop	$V_F$	$I_F = 3\text{A}$	-	-	1.3	V
Maximum Reverse Current	$I_R$	$V_{RRM} = 600\text{V}$	-	-	10	$\mu\text{A}$

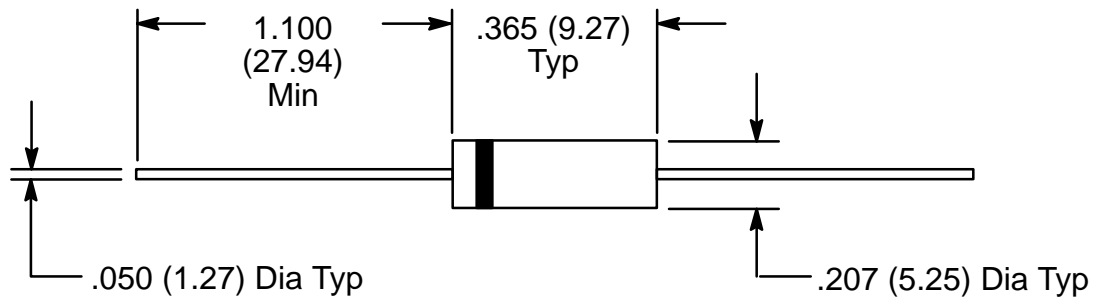

Color Band Denotes Cathode

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [nte manufacturer](#):*

Other Similar products are found below :

[747](#) [797](#) [868](#) [1724](#) [NEH680M50FE](#) [NEHH1.0M450CB](#) [NTE48](#) [NTE526A](#) [228A](#) [231](#) [954](#) [2023](#) [510](#) [R04-11A30-120](#) [04-SLPE3750A](#)  
[5615](#) [591](#) [7056](#) [NTE5710](#) [7448](#) [NEH.10M50AA](#) [NEH2.2M63AA](#) [NEH330M35DD](#) [NEH33M10AA](#) [NEV.22M100AA](#) [TP0006-100](#)  
[NTE182](#) [NTE528](#) [NTE542](#) [NTE74154](#) [WH20-02-25](#) [04-SCBW25L-BK](#) [04-SCBW32L-BK](#) [04-SCW10C-BK](#) [04-SCBW19L-GR](#) [04-](#)  
[SCW19L-WH](#) [04-SCW19L-OR](#) [04-SCW38L-WH](#) [04-SCBW50L-OR](#) [04-SCBW50L-GR](#) [04-SCW10C-GR](#) [04-SCW10C-OR](#) [04-SCBW32L-](#)  
[GR](#) [04-SCBW32L-WH](#) [04-SCBW32L-OR](#) [04-SCBW6C-WH](#) [04-SCBW6C-GR](#) [04-SCBW6C-OR](#) [04-SCBW25L-GR](#) [04-SCBW25L-WH](#)