



ELECTRONICS, INC.
 44 FARRAND STREET
 BLOOMFIELD, NJ 07003
 (973) 748-5089
<http://www.nteinc.com>

NTE6248 Silicon Fast Rectifier

Features:

- High Reliability
- Low Forward Voltage Drop
- High Current Capability
- High Surge Current Capability


Maximum Ratings and Electrical Characteristics:

($T_A = +25^\circ\text{C}$ unless otherwise specified. Resistive or inductive load.)

Maximum Recurrent Peak Reverse Voltage, V_{RRM}	600V
Maximum Average Rectified Forward Current (.375 (9.5) Lead Length, $T_C = +100^\circ\text{C}$), $I_{F(AV)}$.	16A
Non-Repetitive Peak Forward Surge Current (8.3ms Single Half Sine-Wave), I_{FSM}	250A
Power Dissipation, P_D	7.81W
Maximum Instantaneous Forward Voltage ($I_F = 16\text{A}$), V_F	1.5V
Maximum DC Reverse Current (Rated DC Blocking Voltage), I_R	
$T_A = +25^\circ\text{C}$	10 μA
$T_A = +100^\circ\text{C}$	500 μA
Maximum Reverse Recovery Time (Note 1), t_{rr}	50ns
Total Capacitance (Note 2), C_T	145pF
Thermal Resistance, Junction-to-Ambient, R_{thJA}	16 $^\circ\text{C}/\text{W}$
Thermal Resistance, Junction-to-Lead, R_{thJL}	1.2 $^\circ\text{C}/\text{W}$
Operating Junction Temperature Range, T_J	-65 $^\circ$ to +150 $^\circ\text{C}$
Storage Temperature Range, T_{stg}	-65 $^\circ$ to +150 $^\circ\text{C}$

Note 1. Reverse Recovery Test Conditions: $I_F = 500\text{mA}$, $I_R = 1\text{A}$, $I_{RR} = 250\text{mA}$.

Note 2. Measured at 1MHz and applied reverse voltage of 4V.

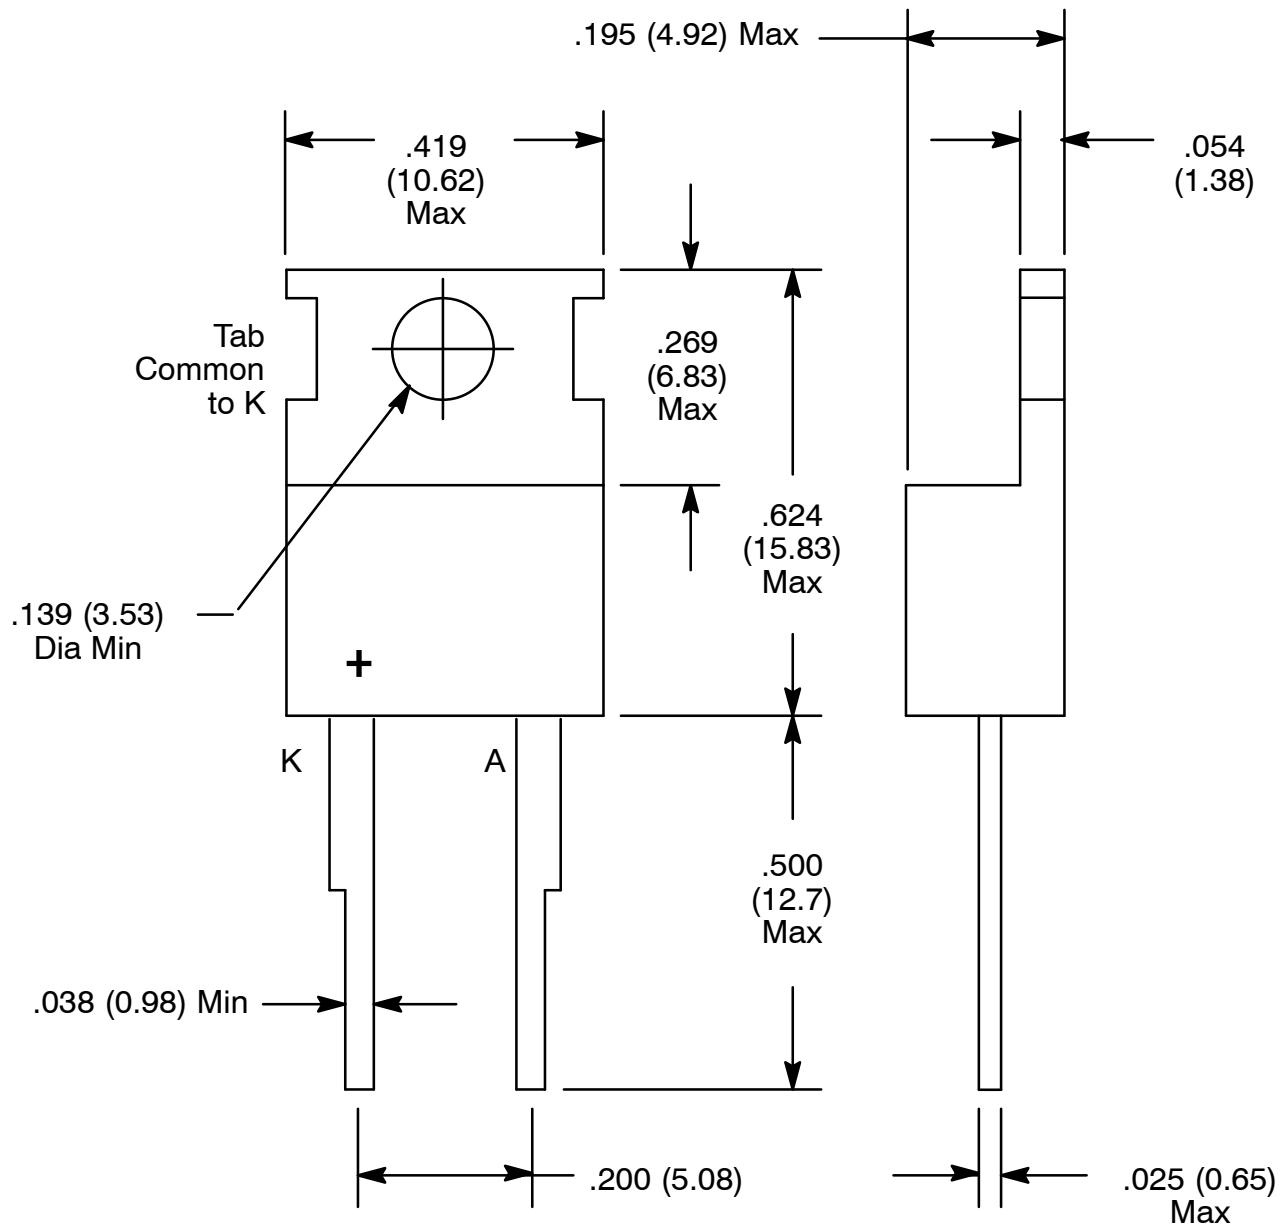

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [nte manufacturer](#):

Other Similar products are found below :

[747](#) [797](#) [868](#) [1724](#) [NEH680M50FE](#) [NEHH1.0M450CB](#) [NTE48](#) [NTE526A](#) [228A](#) [231](#) [954](#) [2023](#) [510](#) [R04-11A30-120](#) [04-SLPE3750A](#)
[5615](#) [591](#) [7056](#) [NTE5710](#) [7448](#) [NEH.10M50AA](#) [NEH2.2M63AA](#) [NEH330M35DD](#) [NEH33M10AA](#) [NEV.22M100AA](#) [TP0006-100](#)
[NTE182](#) [NTE528](#) [NTE542](#) [NTE74154](#) [WH20-02-25](#) [04-SCBW25L-BK](#) [04-SCBW32L-BK](#) [04-SCW10C-BK](#) [04-SCBW19L-GR](#) [04-](#)
[SCW19L-WH](#) [04-SCW19L-OR](#) [04-SCW38L-WH](#) [04-SCBW50L-OR](#) [04-SCBW50L-GR](#) [04-SCW10C-GR](#) [04-SCW10C-OR](#) [04-SCBW32L-](#)
[GR](#) [04-SCBW32L-WH](#) [04-SCBW32L-OR](#) [04-SCBW6C-WH](#) [04-SCBW6C-GR](#) [04-SCBW6C-OR](#) [04-SCBW25L-GR](#) [04-SCBW25L-WH](#)