


DOL Starters P1M



- Up to 7.5kW
- IP65 enclosure
- Start-Stop pushbuttons
- Hand-Off-Auto selector
- Wired to accept overload
- Indicator
- Anti-condensation heater



Options and ordering codes

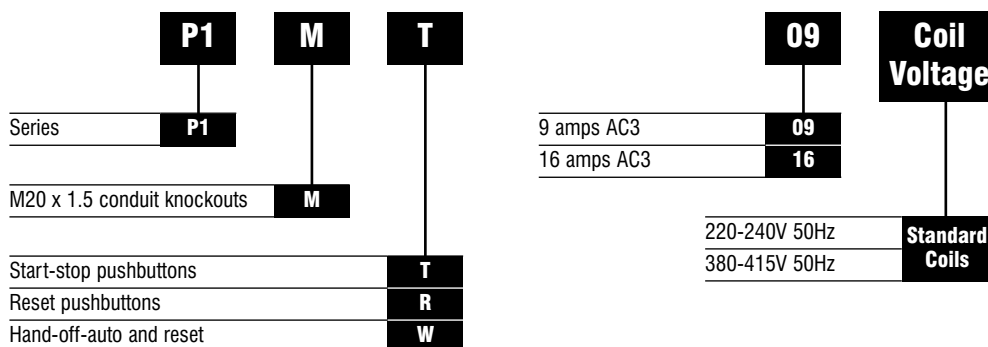

Specification

		P1M_09	P1M_16
Contactor		K2-09A10	K2-16A10
Overload (sold separately)		U1216E	U1216E
Max. frequency of operation		15/hour	
Max. temperature		40 °C	
Ratings AC3 at 400V	Amps	9	16
	kW	4	7.5
	HP	6	11
Enclosure protection	'T' x 'R' 'W'	IP 65 IP 65	
Coil	Inrush VA Hold VA Voltage Range	35 – 45 7 – 10 0.85 – 1.1	
Cable cross section			
Line	Solid or stranded mm ² Flexible mm ² Flexible with multicore cable end mm ² Cables per clamp	0.75 – 4 0.75 – 2.5 0.5 – 2.5 2	
Motor	Solid or stranded mm ² Flexible mm ² Flexible with multicore cable end mm ² Cables per clamp	0.75 – 6 + 0.75 – 2.5 0.75 – 4 + 0.5 – 2.5 0.5 – 2.5 + 0.5 – 1.5 1 + 1	

Selection and product ordering codes

Starter

AC3 Rating at 400V			Description	Product
Amps	kW	HP		
9	4	6	Start-Stop P/B	P1MT09
16	7.5	11.5	Start-Stop P/B	P1MT16
9	4	6	Reset P/B	P1MR09
16	7.5	11.5	Reset P/B	P1MR16
9	4	6	H-O-A	P1MW09
16	7.5	11.5	H-O-A	P1MW16

Starters are wired to accept overload. Overloads supplied as separate item. Specify coil voltage.

Overload

Range Amps	Product	Range Amps	Product
0.12-0.18	U1216E0.18	2.7-4	U1216E4
0.18-0.27	U1216E0.27	4-6	U1216E6
0.27-0.4	U1216E0.4	6-9	U1216E9
0.4-0.6	U1216E0.6	8-11	U1216E11
0.6-0.9	U1216E0.9	10-14	U1216E14
0.8-1.2	U1216E1.2	13-18	U1216E18
1.2-1.8	U1216E1.8	17-23	U1216E23
1.8-2.7	U1216E2.7	23-30	U1216E30


Accessories

Description	Product
Normally open auxiliary – Max 3	MCA10
Normally closed auxiliary – Max 3	MCA01
Anti-condensation heater – 415V 1.5W	K2HR
Lens cap	LG9743


Description	Product
Green indicator (Current)	K2-ING
Red indicator (Current)	K2-INR
Neutral terminal	LG9744

Circuit diagrams

Wiring 3 Phase Motors




Single Phase Motors

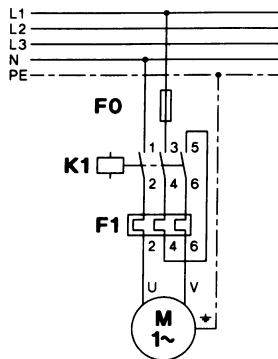


Control circuit

P1M T09 P1M T16 P1M W09 P1M W16

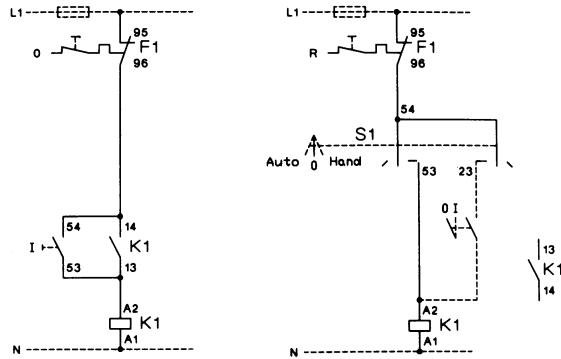


Dimensions (mm)


P1M T09

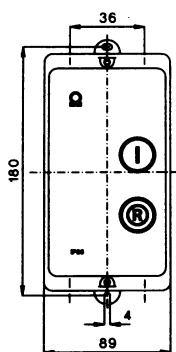



P1M T16

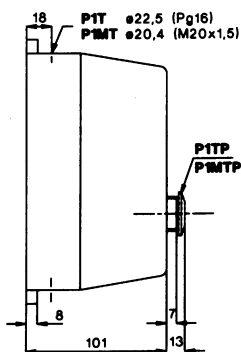

P1M W09

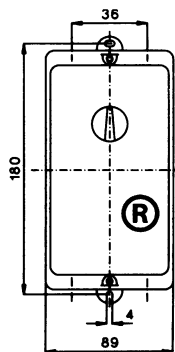

P1M W16

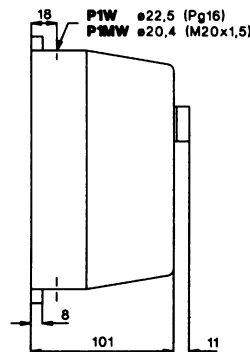

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for imo manufacturer:

Other Similar products are found below :

[20.155MV/12-E](#) [MC14N-S-10110AC](#) [MB09-S-10=24](#) [DPS-1-030-24](#) [SRF-1C-SL-12VDC](#) [MB09-S-1024](#) [LDC18RRS](#) [SFSYE0111](#)
[21.1500M/6-E](#) [20.3304M/2-E](#) [21.910M/5-E](#) [20.95MA/2-E](#) [21.95MHF/2-E](#) [PE69-4032](#) [DPS-1-060-24](#) [CS20A-A2](#) [CS20A-U1](#) [VFC02](#)
[MSSTC11DA06](#) [20.95MHF/3-E](#) [B3T10](#) [XKL-040-21](#) [20.3304M/4-E](#) [SRDH-1A-SL-24VDC](#) [20.2500M/5-E](#) [21.155MH/12](#) [SRRHN-2CN-](#)
[SL-12VDC](#) [QYE21XXF24DC](#) [20.920M/5-E](#) [MC10N-S-10110AC](#) [21.1550MF/8-E](#) [20.910M/6-E](#) [20.95MH/3-E](#) [21.95MV/3](#) [MA05-S-](#)
[01230AC](#) [SRRHN-2CN-SL-5VDC](#) [LB69-4040](#) [20.3001M/6](#) [21.1500M/3-E](#) [21.95MHF/6-E](#) [20.95MV/2-E](#) [20.155MV/4-E](#) [20.950M/2-E](#)
[MT5 1-50-FAR](#) [BS3P3REDO](#) [MB12-S-10=24](#) [MA05-S-1024DC](#) [20.155MVF/8-E](#) [20.3302M/4-E](#) [20.910M/3-E](#)