


Features


- Clear See-Thru Cover
- Flange Mount
- .250" (6.35mm) Quick Connect Terminals also Suitable for Soldering
- Heavy Duty Contacts



SPDT, 1 Form "C"

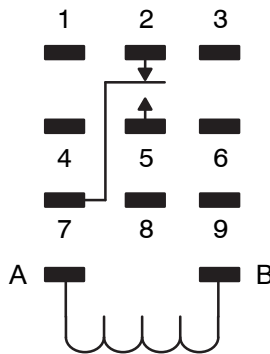

DPDT, 2 Form "C"

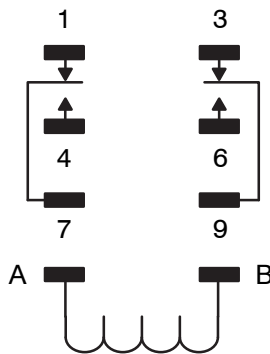


R55 Series



General Purpose, 25 Amp, SPDT & DPDT, AC & DC Relays for Alarm Controls, Vending Machines.

D26

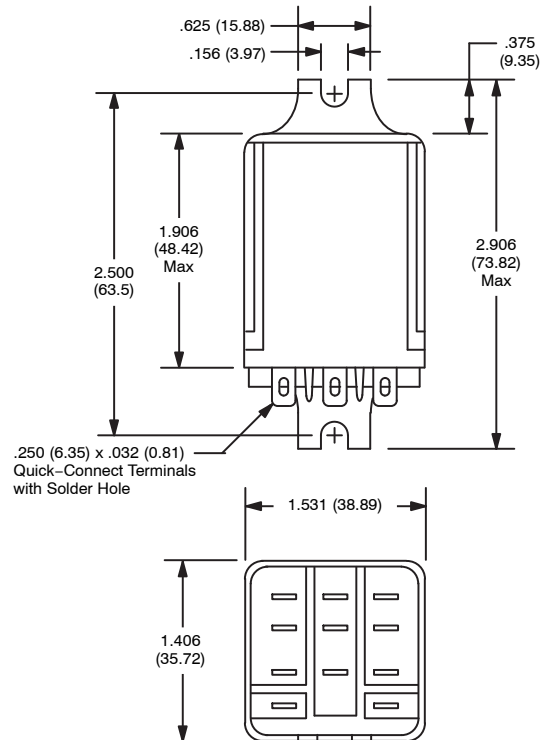

Electrical Specifications

Contact

Rating: 25 Amps, 1 HP @ 120 VAC, 13A @ 28 VDC resistive, 20A @ 15 VDC resistive, 25A @ 300 VAC resistive, 5A @ 600 VAC resistive

Material: Silver cadmium oxide gold flashed 1/4"

Coil

Coil Voltages: See Chart

Insulation Characteristics

Dielectric Strength

Across Open Contacts: 1000 VRMS
Pole To Adjacent Pole: 2200 VRMS
Contacts/Coil To Frame: 1600 VRMS

Environmental Characteristics

Operating: -30°C to +50°C (AC), -30°C to +60°C (DC)

Storage: -30°C to +100°C

Weight

Std: 3.3 oz (94 grams) approx

AC OPERATED						
NTE Type No.	Nom. Volt.	Contact Arr.	Coil Res. Ohms (Typ)	Nom. Power	Max. Contact Cur. @ 28VDC or 300VAC	Diag No.
R55-5A20-24F	24VAC	SPDT	—	3.0VA	25A	D26
R55-5A20-120F	120VAC	SPDT	—	3.0VA	25A	D26
R55-11A20-24F	24VAC	DPDT	—	2.75VA	25A	D26
R55-11A20-120F	120VAC	DPDT	—	2.75VA	25A	D26
R55-11A20-240F	240VAC	DPDT	—	2.75VA	25A	D26
DC OPERATED						
R55-5D20-12F	12VDC	SPDT	120	1.2W	25A	D26
R55-5D20-24F	24VDC	SPDT	472	1.2W	25A	D26
R55-11D20-12F	12VDC	DPDT	100	1.5W	25A	D26
R55-11D20-24F	24VDC	DPDT	400	1.5W	25A	D26

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [General Purpose Relays](#) category:

Click to view products by [NTE manufacturer](#):

Other Similar products are found below :

[APF30318](#) [JVN1AF-4.5V-F](#) [PCN-105D3MHZ](#) [5JO-10000S-SIL](#) [5JO-1000CD-SIL](#) [5JO-400CD-SIL](#) [LY2S-AC220/240](#) [LYQ20DC12](#)
[6031007G](#) [6131406HQ](#) [6-1393099-3](#) [6-1393099-8](#) [6-1393122-4](#) [6-1393123-2](#) [6-1393767-1](#) [6-1393843-7](#) [6-1415012-1](#) [6-1419102-2](#) [6-](#)
[1423698-4](#) [6-1608051-6](#) [6-1608067-0](#) [6-1616170-6](#) [6-1616248-2](#) [6-1616282-3](#) [6-1616348-2](#) [6-1616350-1](#) [6-1616350-8](#) [6-1616358-7](#) [6-](#)
[1616359-9](#) [6-1616360-9](#) [6-1616931-6](#) [6-1617039-1](#) [6-1617052-1](#) [6-1617090-2](#) [6-1617090-5](#) [6-1617347-5](#) [6-1617353-3](#) [6-1617801-8](#) [6-](#)
[1617802-2](#) [6-1618107-9](#) [6-1618248-4](#) [M83536/1-027M](#) [CX-4014](#) [MAHC-5494](#) [MAVCD-5419-6](#) [703XCX-120A](#) [7-1393100-5](#) [7-1393111-7](#)
[7-1393144-5](#) [7-1393767-8](#)