



# Visual Signals **XENON** **BEACONS**

## Industrial Xenon Beacons > X80 Series



### Product overview

The X80 is a flashing mode type of beacon (single stage alarm) suitable for a wide range of 'local' signalling applications where a low cost and energy efficient solution is required.

Xenon beacons (sometimes called strobes) are controlled via a PCB and put out a very brief but bright flash of white light by ionizing and

then discharging a large current through the xenon gas.

The unit comes fully assembled and ready for installation and has two mounting options, stud mount or surface mount using a two piece fixing plate supplied. One plate is fixed to the appropriate surface the other to the beacon, the two plates then 'snap fit' together.

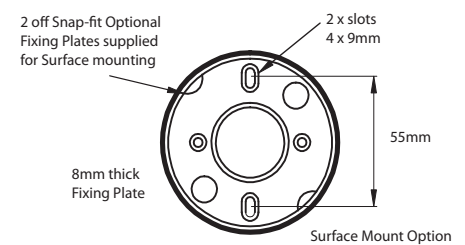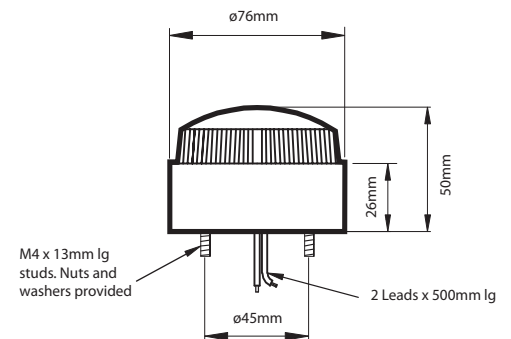

## X80 Series > Ordering Information

Code No:	Voltage:	Light Source:	Current:
X80-01	18-30v Dc ---	Xenon 1.0 J	40 mA •
X80-02	10-100v Dc --- 20-72v Ac ~	Xenon 2.0 J	110 mA •
X80-04	115-230v Ac ~	Xenon 2.0 J	100 / 50 mA

- Average running current at 24v Dc over a 60 second cycle

ADD THE FOLLOWING LENS CODES TO THE PRODUCT WHEN ORDERING



### Features

- Continuously rated
- Wide operating voltage
- 120° prime light output from vertical axis
- Dustproof and submersible in water

### Material

UV Stable Polycarbonate Lens  
UV Stable Polycarbonate Base

**Kg** 0.13

**°C** -20+55

**IP** 67

**FPM** 60/65

**INDUSTRIAL**

**FIRE**

APPROVALS and  
CONFORMITIES



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LED Panel Mount Indicators](#) category:*

*Click to view products by [Moflash Signalling](#) manufacturer:*

Other Similar products are found below :

[607-1312-310F](#) [607-3232-140F](#) [6091M1-24V](#) [6091M5-24V](#) [6091M7-24V](#) [821-0331-503](#) [FL2870C8R](#) [FL2950WL7B](#) [FL589WL8R](#)  
[Q6P3BXXB12E](#) [H8630FBBA3](#) [MPC5ADW6.0](#) [DX1091GN](#) [NL177WL3G](#) [NL276C3G](#) [NL2950BWL3G](#) [NL2950CWL2R](#) [NL589WL2R](#)  
[NL67C3G](#) [NL67C3R](#) [2191L1-12V](#) [PB22SIOL0RG](#) [PB22SPPM41R](#) [PB22SPPM61R](#) [LE177C5B](#) [LH1048BSWL3702](#) [LH1048BWL3702](#)  
[LH382A](#) [LHM62B](#) [SSI-LXH387USBD-150](#) [SSI-LXH9ZIC40587](#) [SSP-LXS110818BA](#) [FL2950BWL7R](#) [FL2950WL7R](#) [FL2951WL8G](#)  
[FL2951WL8R](#) [FL589C7R](#) [FL67C7R](#) [FL67WL8G](#) [2191QU7-24V](#) [2191U1-12V](#) [2191U5-12V](#) [2191U5-6V](#) [2191U7-12V](#) [249-4167-3734-504F](#) [Q6P5BXXG02E](#) [3990A7](#) [5110F3-12V](#) [MPC5BCW18.0](#) [556-1237-801F](#)