

## Product Specification

### General

Batteries, in all their aspects, should be in accordance with IEC 60086-1 and IEC 60086-2

1. Model no. **PRO-ELEC** Alkaline LR6

2. Nominal voltage 1.5Volt

Open circuit voltage 1.5Volt+0.15/-0

3. Nominal capacity 2600mAh

(Test condition:43Ω Load, continuous discharge, and end voltage 0.9V)

4. Average weight 24±1g

5.Shelf life 60Month

6. Performance

Battery service life should meet the values as stated in Table I

Table I

<b>Discharges</b>					
<b>Test condition</b>			<b>Average duration<sup>1)</sup> at 20°C</b>		
Load	Daily period	End voltage	Initial	After 12 months storage <sup>2)</sup>	After 36 months storage <sup>2)</sup>
43Ω	4 h/d	0.9V	80.0 h	73.6 h	68.0 h
10Ω	1 h/d	0.9V	18.0 h	16.6 h	15.3 h
10Ω	continuous	0.9V	18.2h	16.7h	15.5 h
3.9Ω	1 h/d	0.9V	6.5 h	6.0 h	5.5 h
1.8Ω	15 sec/min	0.9V	550 pulses	506 pulses	468pulses

1)Average service life will be calculated without the highest and the lowest of 9 samples

2)Storage conditions: temperature  $20\pm 2^{\circ}\text{C}$  and the Relative Humidity shall be  $65\pm 20\%$

7. Heavy metal content: Mercury(Hg) content should be less than 1PPM

Cadmium (Cd) content should be less than 5 PPM

Lead (Pb) content should be less than 15 PPM

## 8. QUALITY ASSURANCE

DESCRIPTION	AQL
Battery dimensions	0.65%
Appearance	1.00%
Off load voltage	0.65%
On load voltage	1.00%
Service Output	Note 1
Leakage 6.1	0.65% ( Note 2 )
6.2	Note 3
6.3	Note 4

Note 1 : Acceptance/rejection in accordance with IEC publication  
( 1993 ) 86-1

Sub-clause 8.8.

Note 2 : Leakage on arrival at warehouse is within two months after shipping.

Note 3 : Sample size :  $n = 20$   
Judgement :  $Ac = 1, Re = 2$

Note 4 : Sample size :  $n = 20$   
Judgement :  $Ac = 0, Re = 2$

## 9. PACKAGING

Packaging shall be a form agreed by both parties.


## PRECAUTION & HANDLING

- (1) Do not disassemble or short-circuit batteries.
- (2) Do not recharge batteries.
- (3) Do not dispose of batteries in fire.
- (4) Do not allow metal objects to contact the battery terminals.
- (5) Do not mix with used or other battery type (such as alkaline with carbon zinc).
- (6) Do not solder the batteries directly. If soldering or welding connection to the battery is required, consult our engineer for proper methods.
- (7) Do not over-discharge batteries. Force discharging batteries by external power source in a series may cause explosion.
- (8) To install or remove batteries, follow the equipment manufacturer's instructions.
- (9) Keep battery away from small children. If swallowed, consult a physician at once.
- (10) Remove batteries from device when it is not in use.

## STORAGE

- (1) Store in cool, dry place before use.
- (2) Do not keep batteries at temperature of 45 or above.
- (3) Do not keep batteries at relative humidity of 75% or above.

**Drawing 1: Dimensions of Battery (LR6/AA Size)**

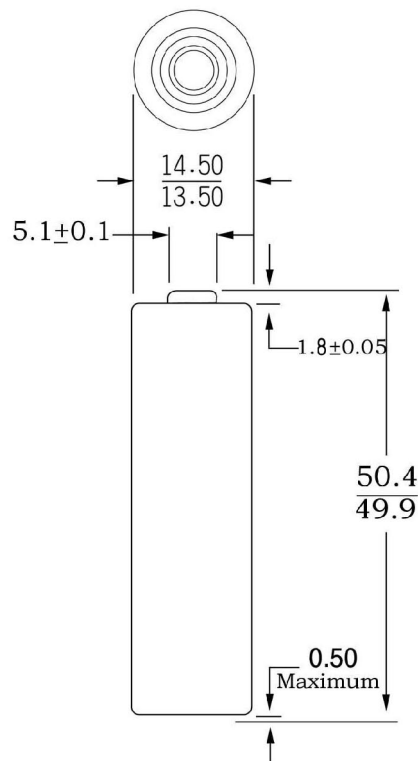

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [pro elec manufacturer](#):*

Other Similar products are found below :

[PE01004](#) [LMP-G60BCW07-02B](#) [PSG91116](#) [PEL00582](#) [PEL00418](#) [PEL00217](#) [PEL00156](#) [PEL00170](#) [PEL00175](#) [PEL00251](#) [PE01003](#)  
[PEL00581](#) [PEL00346](#) [PEL00350](#) [PEL00291](#) [PEL00153](#) [PEL00061](#) [PEL00199](#) [PEL00371](#) [PE01005](#) [PEL00414](#) [JR60431](#) [PEL00417](#)  
[PEL00091](#) [PEL00075](#) [PEL00222](#) [PEL00144](#) [PEL00227](#) [PEL00151](#) [PEL00154](#) [PEL00281](#) [LMP-G60E27W07-02B](#) [PSG91112](#) [2213U 2.4A](#)  
[PEL00093](#) [PEL00223](#) [PEL00165](#) [PEL00051](#) [HS-5626](#) [1518C WHT](#) [PEL00067](#) [PEL00221](#) [PEL00225](#) [PEL00157](#) [PEL00162](#) [PEL00163](#)  
[PEL00231](#) [PE000031](#) [PC2213U](#) [PEL00347](#)