

The PSU 30205 is a very compact, single rail 240V mains power supply unit designed primarily for the supply of digital panel meters. The linear regulator IC used features over-current and over-temperature protection and offers a 100mA @ +5V d.c. regulated output.

- 100mA @ +5V d.c. Regulated Output
- Very Compact Design
- Simple Screw-Terminal Connection
- Encapsulated Mains Transformer
- Use with Lascar Panel Meters




Standard Unit	Stock Number PSU 30205			
Specification	Min.	Typ.	Max.	Unit
Load regulation			1	%
Line regulation			1	%
Ripple			0.5	mV
Operating temperature	0		70	°C
Output Voltage		5		V d.c.
Output Current		100		mA
Input (50-60Hz)	220	240	250	V a.c.

**SAFETY**

For safe operation, the unit must be installed in an enclosure which prevents accidental contact with hazardous voltages, by providing appropriate insulation or guarding. If the enclosure is made of a conducting material or the internal surfaces have a conductive coating, ensure that no part of the power supply will come into contact with it, and maintain an air gap clearance of minimum 10mm (0.39"). The mains lead to the unit must be fused with a 100mA fuse. In general, it is the responsibility of the user to ensure that the incorporation of the power supply unit into the OEM equipment conforms to the relevant sections of EN 60742, in accordance with the Low Voltage Directive (LVD 93/68/EEC).  
IF IN DOUBT CONTACT A LASCAR APPLICATIONS ENGINEER.


**CONNECTIONS**

The unit is supplied for operation with a 240V / 50Hz mains input. Follow the wiring diagram when using this power supply unit. Incorrect connection may damage the power supply unit.

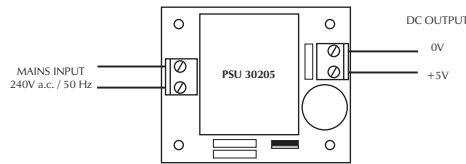

IF IN DOUBT CONTACT A LASCAR APPLICATIONS ENGINEER.

**DIMENSIONS** All dimensions in mm (inches)

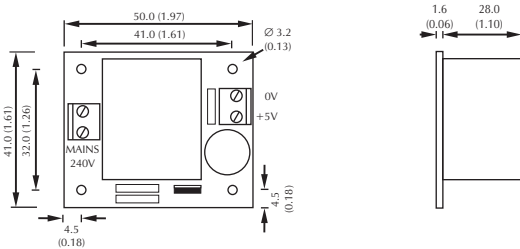

Specifications liable to change without prior warning PSU 30205 Issue 2 August/2002 M.C. Applies to PSU 30105/1

LASCAR ELECTRONICS LTD.  
MODULE HOUSE, WHITEPARISH,  
WILTSHIRE SP5 2SJ UK  
TEL: +44 (0)1794 884567 FAX: +44 (0)1794 884616  
E-mail: sales@lascar.co.uk

LASCAR ELECTRONICS INC.  
3750 West 26th Street,  
Erie, PA 16506 USA  
TEL: +1 (814) 835 0621 FAX: +1 (814) 838 8141  
E-mail: us-sales@lascarelectronics.com

LASCAR ELECTRONICS (HK) LIMITED  
FLAT C, 5/FL., LUCKY FTY. bldg., 63-65 HUNG TO ROAD  
KWUN TONG, KOWLOON, HONG KONG  
TEL: +852 2797 3219 FAX: +1 (814) 838 8147  
E-mail: b4lascar@samsongroup.com.hk

The PSU 30205 is a very compact, single rail 240V mains power supply unit designed primarily for the supply of digital panel meters. The linear regulator IC used features over-current and over-temperature protection and offers a 100mA @ +5V d.c. regulated output.

- 100mA @ +5V d.c. Regulated Output
- Very Compact Design
- Simple Screw-Terminal Connection
- Encapsulated Mains Transformer
- Use with Lascar Panel Meters




Standard Unit	Stock Number PSU 30205			
Specification	Min.	Typ.	Max.	Unit
Load regulation			1	%
Line regulation			1	%
Ripple			0.5	mV
Operating temperature	0		70	°C
Output Voltage		5		V d.c.
Output Current		100		mA
Input (50-60Hz)	220	240	250	V a.c.

**SAFETY**

For safe operation, the unit must be installed in an enclosure which prevents accidental contact with hazardous voltages, by providing appropriate insulation or guarding. If the enclosure is made of a conducting material or the internal surfaces have a conductive coating, ensure that no part of the power supply will come into contact with it, and maintain an air gap clearance of minimum 10mm (0.39"). The mains lead to the unit must be fused with a 100mA fuse. In general, it is the responsibility of the user to ensure that the incorporation of the power supply unit into the OEM equipment conforms to the relevant sections of EN 60742, in accordance with the Low Voltage Directive (LVD 93/68/EEC).  
IF IN DOUBT CONTACT A LASCAR APPLICATIONS ENGINEER.


**CONNECTIONS**

The unit is supplied for operation with a 240V / 50Hz mains input. Follow the wiring diagram when using this power supply unit. Incorrect connection may damage the power supply unit.

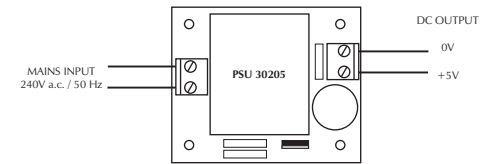

IF IN DOUBT CONTACT A LASCAR APPLICATIONS ENGINEER.

**DIMENSIONS** All dimensions in mm (inches)

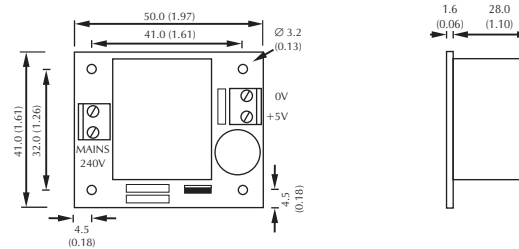

Specifications liable to change without prior warning PSU 30205 Issue 2 August/2002 M.C. Applies to PSU 30105/1

LASCAR ELECTRONICS LTD.  
MODULE HOUSE, WHITEPARISH,  
WILTSHIRE SP5 2SJ UK  
TEL: +44 (0)1794 884567 FAX: +44 (0)1794 884616  
E-mail: sales@lascar.co.uk

LASCAR ELECTRONICS INC.  
3750 West 26th Street,  
Erie, PA 16506 USA  
TEL: +1 (814) 835 0621 FAX: +1 (814) 838 8141  
E-mail: us-sales@lascarelectronics.com

LASCAR ELECTRONICS (HK) LIMITED  
FLAT C, 5/FL., LUCKY FTY. bldg., 63-65 HUNG TO ROAD  
KWUN TONG, KOWLOON, HONG KONG  
TEL: +852 2797 3219 FAX: +852 2343 6187  
E-mail: b4lascar@samsongroup.com.hk

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [lascar](#) manufacturer:*

Other Similar products are found below :

[EL-USB-1-PRO](#) [EL-USB-5](#) [EL-USB-4](#) [SP400-BLUE](#) [SGD21-B](#) [EL-WIFI-TP+-PROBE-G](#) [EL-CC-1-001 PK10](#) [S43-RS485](#) [EL-MOTE-WALL-BRACKET](#) [EL-MOTE-T-PLUS](#) [SGD24-M-IP](#) [EL-GFX-1](#) [EM32-1B-LED](#) [EMV1200](#) [DPM3AS-BL](#) [EL-GFX-DTC](#) [EL-USB-RT](#) [EL-WIFI-ALERT](#) [DTM 995B](#) [DPM125-BL](#) [DPM942-FPSI](#) [EL-CC-2-001 PK10](#) [EL-CC-2-005 PK10](#) [S70-TP](#) [EL-SIE-1](#) [EL-SIE-1+](#) [EL-SIE-2+](#) [EL-SIE-6+](#) [SGD24-M-IP420](#) [WIRELESS ALERT TP](#) [EL-SGD43-ATP](#) [EL-GFX-2](#) [EM32-1B](#) [EL-USB-ACT](#) [EL-CC-2-002 PK10](#) [EL-MOTE-TH](#) [EL-USB-CO](#) [EMT1900](#) [EL-ENVIROPAD-TC](#) [DPM702S](#) [SGD 43-A DK+](#) [EL-USB-2-LCD+](#) [EL-WIFI-21CFR-TP+](#) [EL-GFX-DTP+](#) [EL-CC-2-004 PK10](#) [EL-USB-5+](#) [EL-USB-TP-LCD-PROBE-G](#) [EL-CC-1-003 PK10](#) [SGD 24-M-IP420](#) [DPM125](#)