

CT132TRAN CURRENT SENSOR/ CURRENT TRANSDUCER

DESCRIPTION

A range of current sensors / current transducers available with 0-5V / 0-10V DC self powered output or 4-20mA loop powered output.

APPLICATION

For transforming low currents of 10A-150A AC into standard DC output signals.



FEATURES

- Built in seakable terminal covers
- Base or DIN rail mounting
- Customers selectable 0.5V / 10V DC output
- Small size
- High accuracy 0.5 all models

TECHNICAL SPECIFICATION


Accuracy: Class 0.5, EN 60688
 Response Time: 200msec
 Output: 5V/10V DC (self powered)
 (1m ohm load)
 4-20mA DC (15-30V DC loop powered)
 (max load 600ohms @ 24V DC)
 Temperature Range: -15°C to +50°C
 Isolation: 4kV 50Hz (1 sec)
 Operating Range: 0-120% nominated FS
 Frequency Range: 45/65Hz

RANGE

INPUT	OUTPUT	
	5/10V DC	4/20mA DC
10A	CT132TRAN10A-5/10V	CT132TRAN10A-4/20mA
20A	CT132TRAN20A-5/10V	CT132TRAN20A-4/20mA
50A	CT132TRAN50A-5/10V	CT132TRAN50A-4/20mA
100A	CT132TRAN100A-5/10V	CT132TRAN100A-4/20mA
150A	CT132TRAN150A-5/10V	CT132TRAN150A-4/20mA

Order Example: A CT132TRAN with 50A input and 5/10V DC output is part number CT132TRAN50A-5/10V

DIMENSIONS (mm)

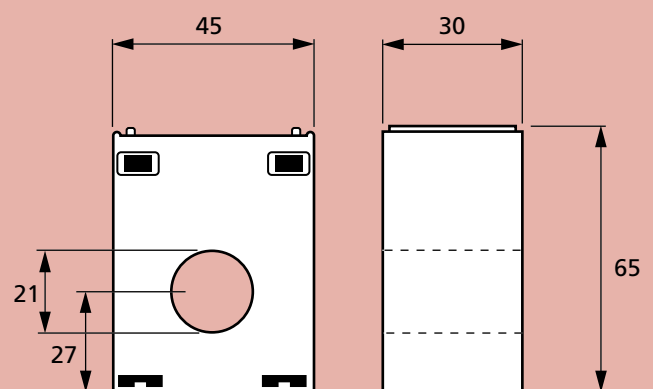

Our policy is one of continuous development and therefore specifications may change without notice.

HOWARD BUTLER LTD

CROWN WORKS, LINCOLN ROAD
WALSALL WS1 2EB ENGLAND

Tel: 01922 640003 Fax: 01922 723626
 International Tel: +44 1922 640003 E-mail: sales@hobut.co.uk
<http://www.hobut.co.uk>

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [hobut](#) manufacturer:

Other Similar products are found below :

[PD72MIS500V/2/938-658](#) [M850-LTHN-RS-PO](#) [D48A25](#) [SHB60A60-CLASS 1](#) [CT132TRAN10A-5/10V](#) [CT105F-150/5-2.5/1](#) [D72M50](#)
[CT105F-100/5-2.5/1](#) [CT160-5-H7](#) [F3PAM602-15V](#) [CT132TRAN20A-4/20MA](#) [D72D60ADC](#) [F3PAM602-10A](#) [F3PAM602-20A](#)
[F3PAM602-5A](#)