

$V_{DRM}$  = 4200 V  
 $I_{T(AV)M}$  = 470 A  
 $I_{T(RMS)}$  = 740 A  
 $I_{TSM}$  =  $7.1 \cdot 10^3$  A  
 $V_{TO}$  = 1 V  
 $r_T$  = 1.5 mΩ

# Phase Control Thyristor


## 5STP 04D4200

Doc. No. 5SYA1025-07 Nov. 13

- Patented free-floating silicon technology
- Low on-state and switching losses
- Designed for traction, energy and industrial applications
- Optimum power handling capability
- Interdigitated amplifying gate

### Blocking

*Maximum rated values<sup>1)</sup>*

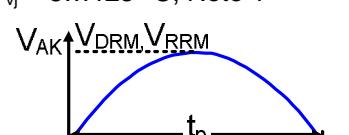Parameter	Symbol	Conditions	5STP 04D4200	Unit
Max repetitive peak forward and reverse blocking voltage	$V_{DRM}$ , $V_{RRM}$	$f = 50$ Hz, $t_p = 10$ ms, $T_{vj} = 5 \dots 125$ °C, Note 1 	4200	V
Critical rate of rise of commutating voltage	$dv/dt_{crit}$	Exp. to $0.67 \cdot V_{DRM}$ , $T_{vj} = 125$ °C	1000	V/μs

*Characteristic values*

Parameter	Symbol	Conditions	min	typ	max	Unit
Forward leakage current	$I_{DRM}$	$V_{DRM}$ , $T_{vj} = 125$ °C			100	mA
Reverse leakage current	$I_{RRM}$	$V_{RRM}$ , $T_{vj} = 125$ °C			100	mA

Note 1: Voltage de-rating factor of 0.11% per °C is applicable for  $T_{vj}$  below +5 °C.

### Mechanical data

*Maximum rated values<sup>1)</sup>*

Parameter	Symbol	Conditions	min	typ	max	Unit
Mounting force	$F_M$		8	10	12	kN
Acceleration	a	Device unclamped			50	m/s <sup>2</sup>
Acceleration	a	Device clamped			100	m/s <sup>2</sup>

*Characteristic values*

Parameter	Symbol	Conditions	min	typ	max	Unit
Weight	m				0.3	kg
Housing thickness	H	$F_M = 10$ kN, $T_a = 25$ °C	26		26.6	mm
Surface creepage distance	$D_s$		25			mm
Air strike distance	$D_a$		14			mm

1) Maximum rated values indicate limits beyond which damage to the device may occur

ABB Switzerland Ltd, Semiconductors reserves the right to change specifications without notice.



**On-state***Maximum rated values<sup>1)</sup>*

Parameter	Symbol	Conditions	min	typ	max	Unit
Average on-state current	$I_{T(AV)M}$	Half sine wave, $T_c = 70^\circ C$			470	A
RMS on-state current	$I_{T(RMS)}$				740	A
Peak non-repetitive surge current	$I_{TSM}$	$t_p = 10 \text{ ms}, T_{vj} = 125^\circ C$ , sine half wave, $V_D = V_R = 0 \text{ V}$ , after surge			$7.1 \cdot 10^3$	A
Limiting load integral	$I^2t$				$252 \cdot 10^3$	$\text{A}^2\text{s}$
Peak non-repetitive surge current	$I_{TSM}$	$t_p = 10 \text{ ms}, T_{vj} = 125^\circ C$ , sine half wave, $V_R = 0.6 \cdot V_{RRM}$ , after surge			$5.9 \cdot 10^3$	A
Limiting load integral	$I^2t$				$174 \cdot 10^3$	$\text{A}^2\text{s}$

*Characteristic values*

Parameter	Symbol	Conditions	min	typ	max	Unit
On-state voltage	$V_T$	$I_T = 500 \text{ A}, T_{vj} = 125^\circ C$			1.78	V
Threshold voltage	$V_{(T0)}$				1	V
Slope resistance	$r_T$	$I_T = 300 \text{ A} - 1000 \text{ A}, T_{vj} = 125^\circ C$			1.5	$\text{m}\Omega$
Holding current	$I_H$	$T_{vj} = 25^\circ C$			75	mA
		$T_{vj} = 125^\circ C$			60	mA
Latching current	$I_L$	$T_{vj} = 25^\circ C$			500	mA
		$T_{vj} = 125^\circ C$			200	mA

**Switching***Maximum rated values<sup>1)</sup>*

Parameter	Symbol	Conditions	min	typ	max	Unit
Critical rate of rise of on-state current	$di/dt_{crit}$	$T_{vj} = 125^\circ C, I_{TRM} = 1500 \text{ A}, V_D \leq 0.67 \cdot V_{DRM}, I_{FG} = 2 \text{ A}, t_r = 0.5 \mu\text{s}$	Cont. $f = 50 \text{ Hz}$		100	$\text{A}/\mu\text{s}$
			Cont. $f = 1 \text{ Hz}$		1000	$\text{A}/\mu\text{s}$
Circuit-commutated turn-off time	$t_q$	$T_{vj} = 125^\circ C, I_{TRM} = 2000 \text{ A}, V_R = 200 \text{ V}, di_T/dt = -1.5 \text{ A}/\mu\text{s}, V_D \leq 0.67 \cdot V_{DRM}, dv_D/dt = 20 \text{ V}/\mu\text{s}$			600	$\mu\text{s}$

*Characteristic values*

Parameter	Symbol	Conditions	min	typ	max	Unit
Reverse recovery charge	$Q_{rr}$	$T_{vj} = 125^\circ C, I_{TRM} = 2000 \text{ A}, V_R = 200 \text{ V}, di_T/dt = -1.5 \text{ A}/\mu\text{s}$	450		1400	$\mu\text{As}$
Reverse recovery current	$I_{RM}$		25		40	A
Gate turn-on delay time	$t_{gd}$	$T_{vj} = 25^\circ C, V_D = 0.4 \cdot V_{RM}, I_{FG} = 2 \text{ A}, t_r = 0.5 \mu\text{s}$			3	$\mu\text{s}$

## Triggering

*Maximum rated values<sup>1)</sup>*

Parameter	Symbol	Conditions	min	typ	max	Unit
Peak forward gate voltage	V <sub>FGM</sub>				12	V
Peak forward gate current	I <sub>FGM</sub>				10	A
Peak reverse gate voltage	V <sub>RGM</sub>				10	V
Average gate power loss	P <sub>G(AV)</sub>		see Fig. 7			W

*Characteristic values*

Parameter	Symbol	Conditions	min	typ	max	Unit
Gate-trigger voltage	V <sub>GT</sub>	T <sub>vj</sub> = 25 °C			2.6	V
Gate-trigger current	I <sub>GT</sub>	T <sub>vj</sub> = 25 °C			400	mA
Gate non-trigger voltage	V <sub>GD</sub>	V <sub>D</sub> = 0.4 · V <sub>DRM</sub> , T <sub>vjmax</sub> = 125 °C			0.3	V
Gate non-trigger current	I <sub>GD</sub>	V <sub>D</sub> = 0.4 · V <sub>DRM</sub> , T <sub>vjmax</sub> = 125 °C			10	mA

## Thermal

*Maximum rated values<sup>1)</sup>*

Parameter	Symbol	Conditions	min	typ	max	Unit
Operating junction temperature range	T <sub>vj</sub>				125	°C
Storage temperature range	T <sub>stg</sub>		-40		140	°C


*Characteristic values*

Parameter	Symbol	Conditions	min	typ	max	Unit
Thermal resistance junction to case,	R <sub>th(j-c)</sub>	Double-side cooled F <sub>m</sub> = 8... 12 kN			36	K/kW
	R <sub>th(j-c)A</sub>	Anode-side cooled F <sub>m</sub> = 8... 12 kN			70	K/kW
	R <sub>th(j-c)C</sub>	Cathode-side cooled F <sub>m</sub> = 8... 12 kN			74	K/kW
Thermal resistance case to heatsink,	R <sub>th(c-h)</sub>	Double-side cooled F <sub>m</sub> = 8... 12 kN			7.5	K/kW
	R <sub>th(c-h)</sub>	Single-side cooled F <sub>m</sub> = 8... 12 kN			15	K/kW

**Analytical function for transient thermal impedance:**

$$Z_{th(j-c)}(t) = \sum_{i=1}^n R_i (1 - e^{-t/\tau_i})$$

i	1	2	3	4
R <sub>i</sub> (K/kW)	19.18	9.820	5.450	1.440
τ <sub>i</sub> (s)	0.3862	0.0561	0.0058	0.0024

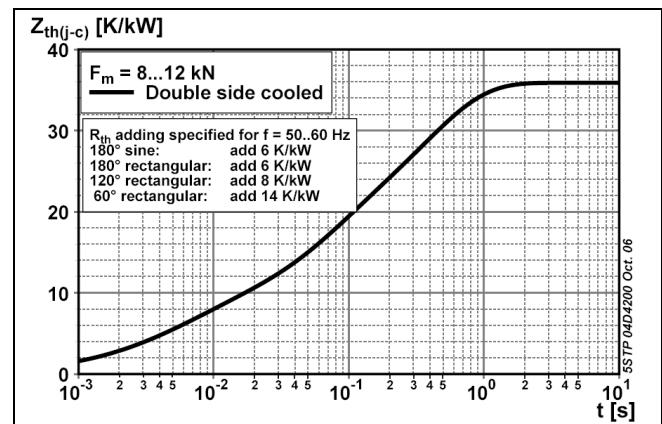

**Fig. 1** Transient thermal impedance (junction-to-case) vs. time

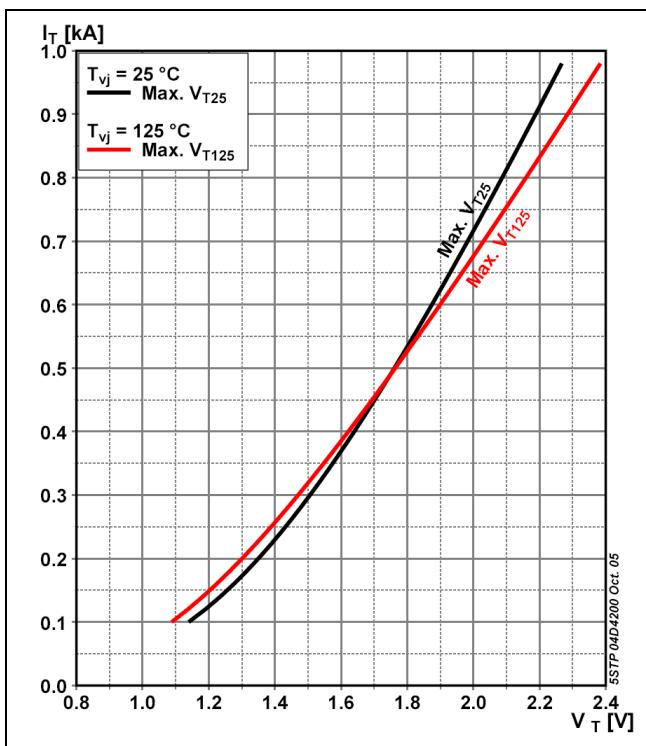


Fig. 2 On-state voltage characteristics

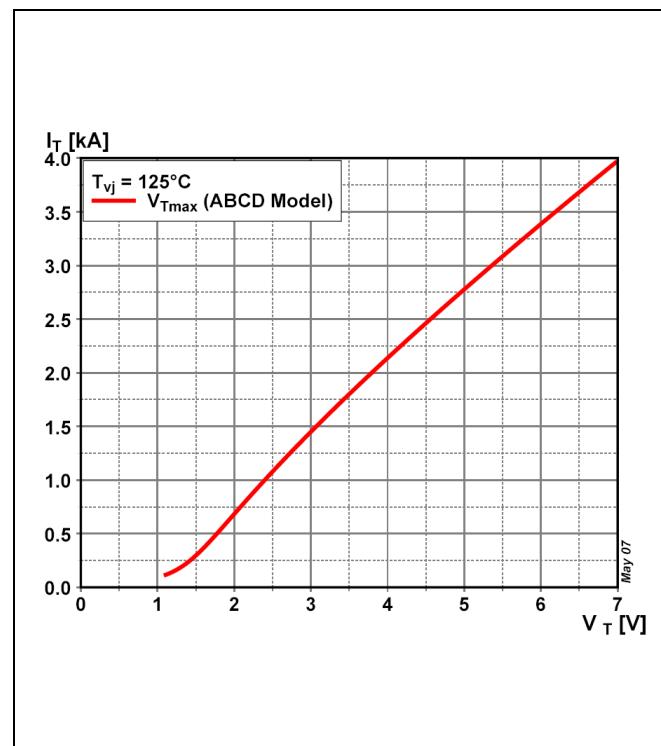
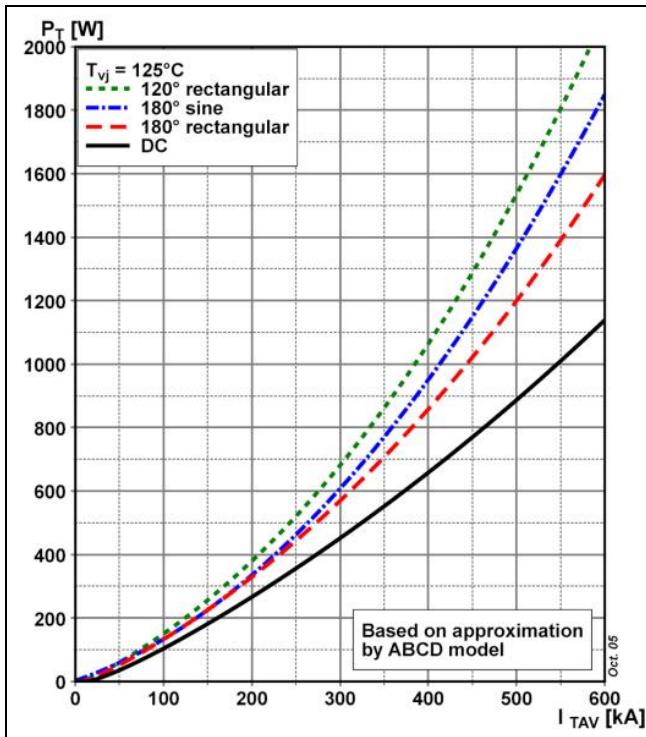
Fig. 3 On-state voltage characteristics  
10 ms sine half wave

Fig. 4 On-state power dissipation vs. mean on-state current, turn-on losses excluded

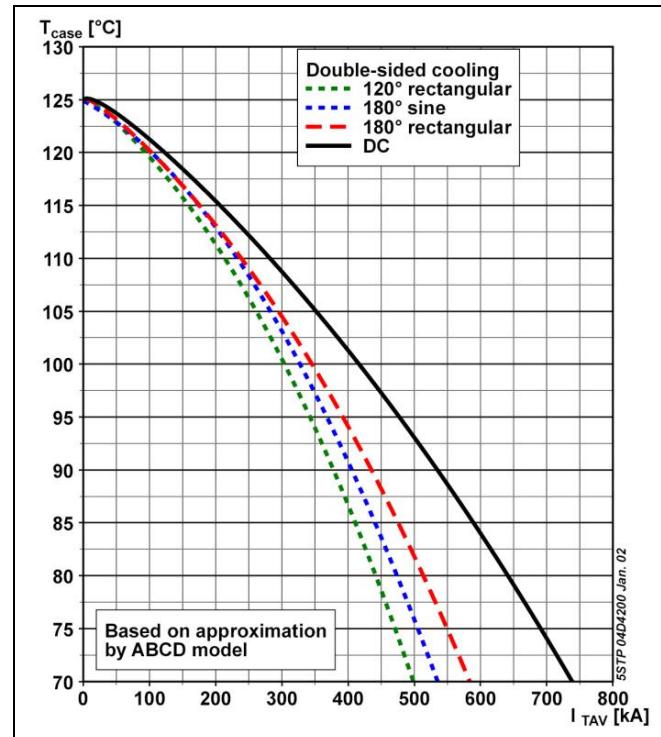


Fig. 5 Max. permissible case temperature vs. mean on-state current, switching losses ignored

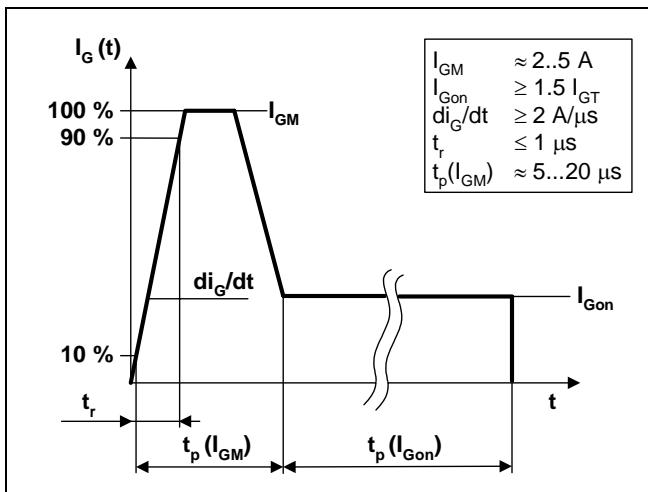


Fig. 6 Recommended gate current waveform

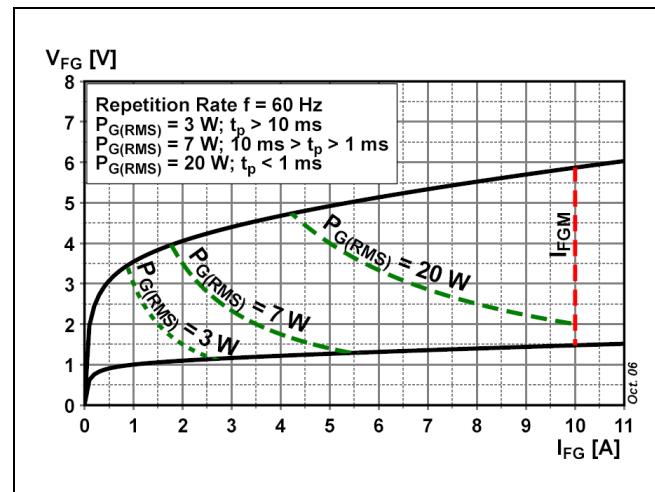


Fig. 7 Max. peak gate power loss

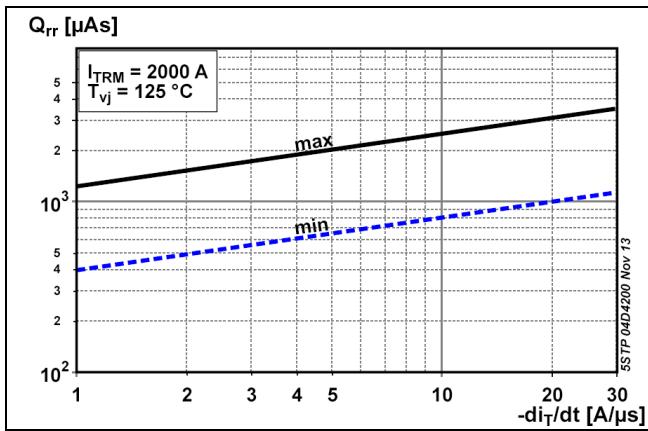


Fig. 8 Reverse recovery charge vs. decay rate of on-state current

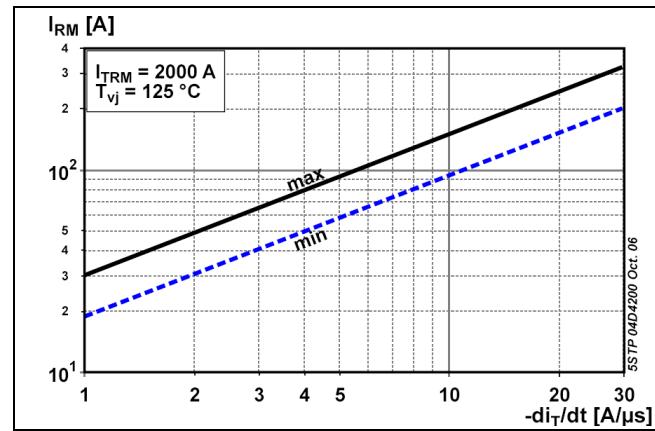


Fig. 9 Peak reverse recovery current vs. decay rate of on-state current

## Turn-on and Turn-off losses

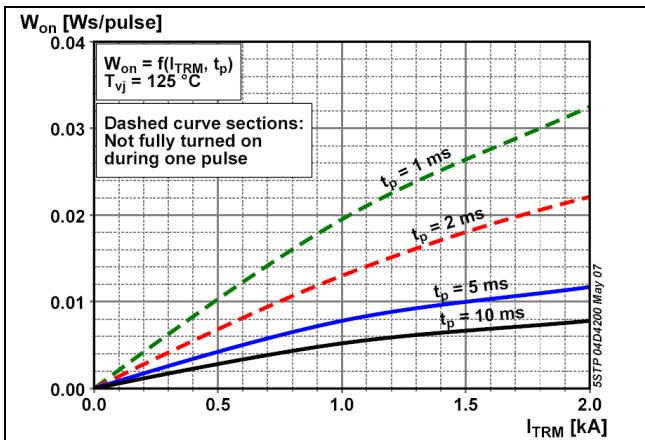


Fig. 10 Turn-on energy, half sinusoidal waves

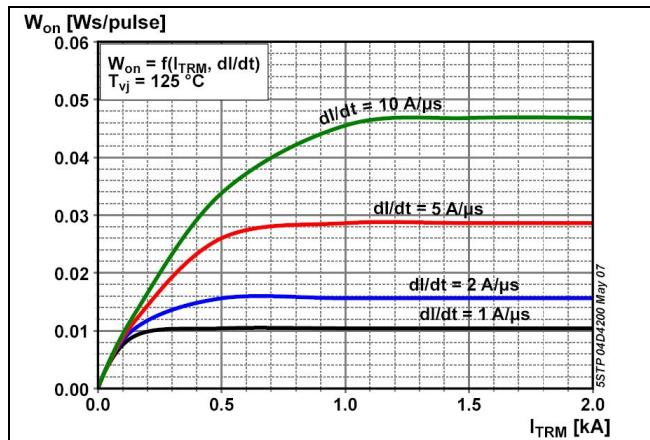


Fig. 11 Turn-on energy, rectangular waves

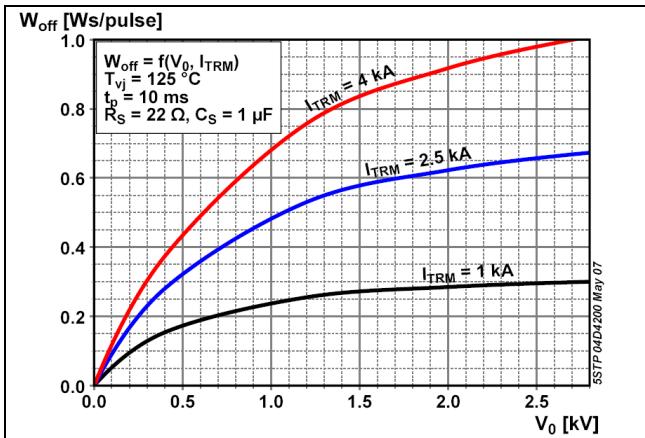


Fig. 12 Turn-off energy, half sinusoidal waves

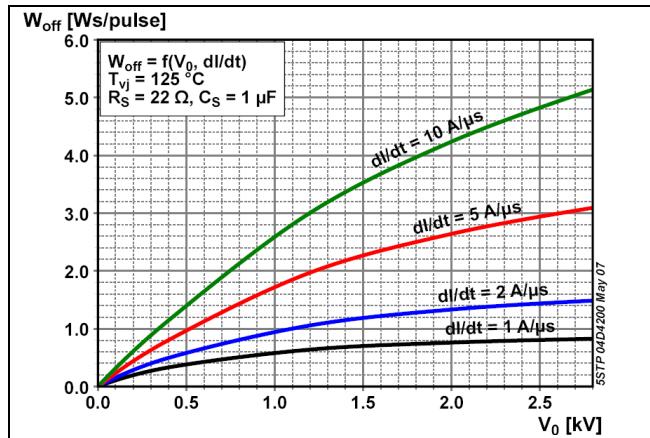


Fig. 13 Turn-off energy, rectangular waves

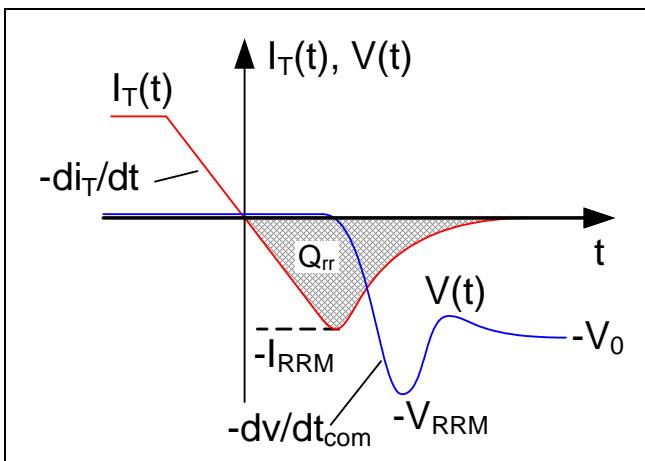


Fig. 14 Current and voltage waveforms at turn-off


### Total power loss for repetitive waveforms:

$$P_{TOT} = P_T + W_{on} \cdot f + W_{off} \cdot f$$

where

$$P_T = \frac{1}{T} \int_0^T I_T \cdot V_T(I_T) dt$$

Fig. 15 Relationships for power loss

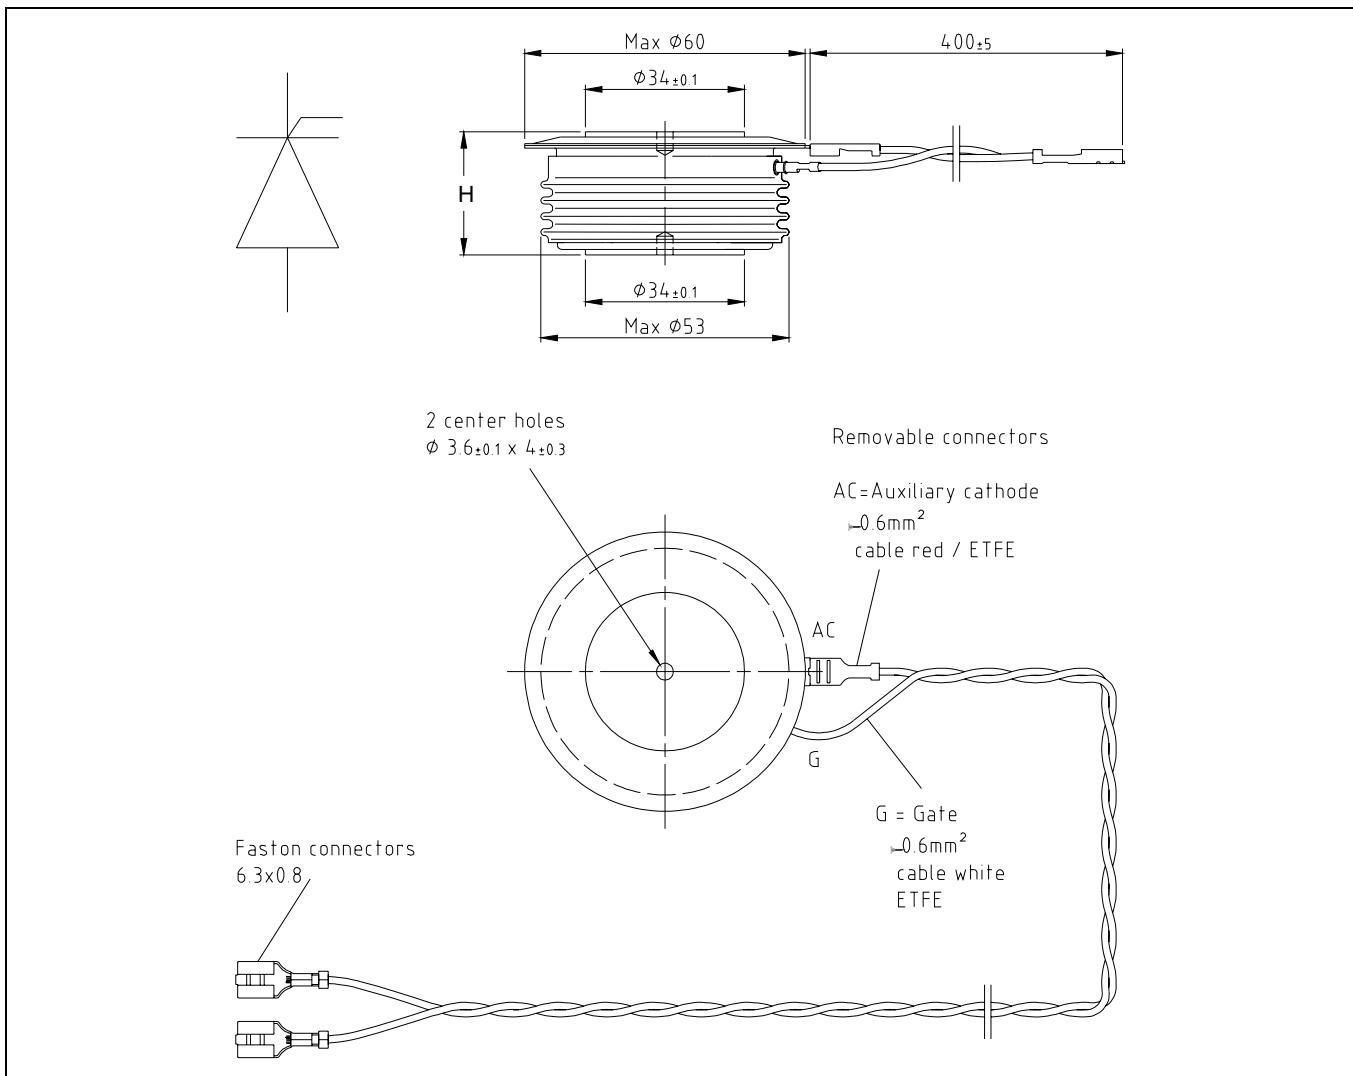

**Fig. 16** Device Outline Drawing

### Related documents:

- 5SYA 2020 Design of RC-Snubber for Phase Control Applications
- 5SYA 2049 Voltage definitions for phase control thyristors and diodes
- 5SYA 2051 Voltage ratings of high power semiconductors
- 5SYA 2034 Gate-Drive Recommendations for PCT's
- 5SYA 2036 Recommendations regarding mechanical clamping of Press Pack High Power Semiconductors
- 5SZK 9104 Specification of environmental class for pressure contact diodes, PCTs and GTO, STORAGE available on request, please contact factory
- 5SZK 9105 Specification of environmental class for pressure contact diodes, PCTs and GTO, TRANSPORTATION available on request, please contact factory

Please refer to <http://www.abb.com/semiconductors> for current version of documents.

**ABB Switzerland Ltd, Semiconductors reserves the right to change specifications without notice.**



**ABB Switzerland Ltd**  
**Semiconductors**  
Fabrikstrasse 3  
CH-5600 Lenzburg, Switzerland

Doc. No. 5SYA1025-07 Nov. 13

Telephone +41 (0)58 586 1419  
Fax +41 (0)58 586 1306  
Email abbsem@ch.abb.com  
Internet [www.abb.com/semiconductors](http://www.abb.com/semiconductors)

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [SCRs](#) category:*

*Click to view products by [ABB manufacturer](#):*

Other Similar products are found below :

[NTE5428](#) [NTE5448](#) [NTE5457](#) [NTE5511](#) [T1500N16TOF VT](#) [T720N18TOF](#) [T880N14TOF](#) [T880N16TOF](#) [TS110-7UF](#) [TT104N12KOF-A](#)  
[TT104N12KOF-K](#) [TT162N16KOF-A](#) [TT162N16KOF-K](#) [TT330N16AOF](#) [VS-16RIA100](#) [VS-22RIA20](#) [VS-2N5206](#) [VS-2N685](#) [VS-40TPS08A-M3](#) [VS-ST230S12P1VPBF](#) [057219R](#) [CLB30I1200HB](#) [T1190N16TOF VT](#) [T1220N22TOF VT](#) [T201N70TOH](#) [T830N18TOF](#)  
[TD92N16KOF-A](#) [TT250N12KOF-K](#) [VS-2N692](#) [VS-2N689](#) [VS-25RIA40](#) [VS-16RIA120](#) [VS-10RIA120](#) [VS-30TPS08PBF](#) [NTE5427](#)  
[NTE5442](#) [VS-2N690](#) [VS-ST300S20P0PBF](#) [TT251N16KOF-K](#) [VS-22RIA100](#) [VS-16RIA40](#) [CR02AM-8#F00](#) [VS-ST110S12P0VPBF](#)  
[TD250N16KOF-A](#) [VS-ST110S16P0](#) [VS-10RIA10](#) [VS-16TTS08-M3](#) [TS110-7A1-AP](#) [T930N36TOF VT](#) [T2160N24TOF VT](#)