

QUINT-UPS/ 24DC/ 24DC/10

Order No.: 2320225




<http://eshop.phoenixcontact.co.uk/phoenix/treeViewClick.do?UID=2320225>

Uninterruptible power supply with IQ technology 24 V/10 A. Provides information regarding the charging state, remaining runtime, and service life of your rechargeable battery module at all times and thereby increases system availability.



Commercial data

EAN	 4 046356 554206
Pack	1
Customs tariff	85044082
Country of Origin	CN
Catalog page information	Page 615 (IF-2011)

Product notes

WEEE/RoHS-compliant since:
31/08/2010



Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation at <http://www.download.phoenixcontact.com>. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Input data

Nominal input voltage	24 V DC
DC input voltage range	18 V DC ... 30 V DC

Current consumption	19 A (Maximum, mains operation)
	62 mA (No load, mains operation)
	4 A (Charging, mains operation)
Current consumption (maximum)	19 A (Maximum, mains operation)
Current consumption (idle)	62 mA (No load, mains operation)
Current consumption (charging process)	4 A (Charging, mains operation)
Buffer period	3 h (with 38 AH)

Output data

Nominal output voltage	24 V DC
Output voltage range	18 V DC ... 30 V DC
Output current	10 A (-25 °C ... +50 °C)
Derating	60 °C ... 70 °C (2.5%/K)
Connection in parallel	Yes, up to 2 modules with redundancy module
Connection in series	No

General data

Width	35 mm
Height	130 mm
Depth	125 mm
Width with alternative assembly	122 mm
Height with alternative assembly	130 mm
	38 mm
Net weight	0.5 kg
Efficiency	> 98.4 %
Degree of protection	IP20
Protection class	III
MTBF (IEC 61709, SN 29500)	> 500000 h
Ambient temperature (operation)	-25 °C ... 70 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Max. permissible relative humidity (operation)	≤ 95 % (25°C, no condensation)
Mounting position	horizontal DIN rail NS 35, EN 60715
Assembly instructions	Can be aligned: horizontal 5 mm, vertical 50 mm
Electromagnetic compatibility	Conformance with EMC Directive 2004/108/EC
Noise immunity	EN 61000-6-2:2005

Standard - Electrical safety	EN 60950-1/VDE 0805 (SELV)
	EN 61558-2-17
Standard – Electronic equipment for use in electrical power installations and their assembly into electrical power installations	EN 50178/VDE 0160 (PELV)
UL approvals	UL/C-UL Recognized UL 60950
	UL Listed UL 508

Connection data, input

Connection method	Pluggable screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	16
Conductor cross section AWG/kcmil max	12
Stripping length	7 mm
Screw thread	M4

Connection data, output

Connection method	Pluggable screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	16
Conductor cross section AWG/kcmil max	12
Stripping length	7 mm

Signaling

Signalization designation	Power In OK
Status display	LED
Note on status display	Static to
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24

Conductor cross section AWG/kcmil max	12
Tightening torque, min	0.5 Nm
Tightening torque max	0.6 Nm
Screw thread	M4
Signalization designation	Alarm
Output name	Switching output
Output description	Relay
Maximum switching voltage	≤ 30 V AC/DC
Continuous load current	≤ 100 mA
Status display	LED
Note on status display	Static to
Signalization designation	Battery charge
Output name	Switching output
Output description	Relay
Maximum switching voltage	≤ 30 V AC/DC
Output voltage	24 V
Continuous load current	≤ 100 mA
Status display	LED bar graph
Note on status display	dynamic
Signalization designation	Battery mode
Output name	Switching output
Output description	Relay
Type of signaling	Battery mode
Maximum switching voltage	≤ 30 V AC/DC
Output voltage	24 V
Continuous load current	≤ 100 mA
Status display	LED
Note on status display	Static to

Certificates



Certification CUL, CUL Listed, UL, UL Listed


Certifications applied for: UL-EX LIS / CUL-EX LIS

Accessories

Item	Designation	Description
General		
2986122	IFS-CONFSTICK	Multi-functional memory block for the INTERFACE system for easy storage and backup of the configuration.
2320500	IFS-USB-DATACABLE	Used for communication between the UPS CONF configuration software and the QUINT UPS IQ and TRIO UPS uninterruptible power supply units.
2938196	QUINT-PS-ADAPTERS7/1	Assembly adapter for QUINT-PS... power supply on S7-300 rail
2320351	UPS-BAT/LI-ION/24DC/60WH	Rechargeable battery module, LI-ION technology, 24 V DC, 60 Wh, for ambient temperatures of -20°C ... +60°C, automatic detection and communication with QUINT UPS-IQ
2320296	UPS-BAT/VRLA/24DC/ 1.3AH	Rechargeable battery module, lead AGM, VRLA technology, 24 V DC, 1.3 Ah, tool-free battery replacement, automatic detection and communication with QUINT UPS-IQ
2320306	UPS-BAT/VRLA/24DC/ 3.4AH	Rechargeable battery module, lead AGM, VRLA technology, 24 V DC, 3.4 Ah, tool-free battery replacement, automatic detection and communication with QUINT UPS-IQ
2320319	UPS-BAT/VRLA/24DC/ 7.2AH	Rechargeable battery module, lead AGM, VRLA technology, 24 V DC, 7.2 Ah, tool-free battery replacement, automatic detection and communication with QUINT UPS-IQ
2320322	UPS-BAT/VRLA/24DC/12AH	Rechargeable battery module, lead AGM, VRLA technology, 24 V DC, 12 Ah, tool-free battery replacement, automatic detection and communication with QUINT UPS-IQ
2320335	UPS-BAT/VRLA/24DC/38AH	Rechargeable battery module, lead AGM, VRLA technology, 24 V DC, 38 Ah, automatic detection and communication with the QUINT UPS-IQ
2320089	UTA 107/30	Universal DIN rail adapter
2938235	UWA 182/52	Universal wall adapter

Drawings

Block diagram

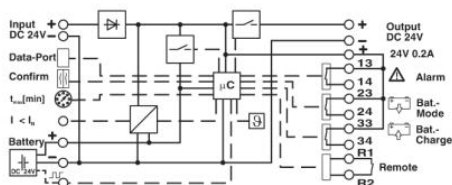

Address

PHOENIX CONTACT Ltd
Halesfield 13
Telford / Shropshire / TF7 4PG,England
Phone 01952 681 700
Fax 01952 681 799
<http://www.phoenixcontact.co.uk>



Phoenix Contact Ltd.
Technical modifications reserved;

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [phoenix contact manufacturer](#):

Other Similar products are found below :

[1203259](#) [3240366](#) [1893300](#) [1212619](#) [1927221](#) [1936102](#) [1730573](#) [3240367](#) [1014246](#) [1014236](#) [1014240](#) [1014290](#) [1014293](#) [1806193](#)
[1823655](#) [1912825](#) [1842254](#) [1768260](#) [1716373](#) [1648030](#) [1579051](#) [1014235](#) [1014239](#) [1014229](#) [1212378](#) [2800744](#) [2867076](#) [3006564](#)
[2800741](#) [5146480](#) [1582539](#) [1623633](#) [1507793](#) [3025587](#) [3069708](#) [1431461](#) [1586976](#) [0311647](#) [1460160](#) [1771338](#) [3048387](#) [2814605](#)
[0309086](#) [1513716](#) [3035684](#) [5451417](#) [0202219](#) [1647747](#) [1730667](#) [1709267](#)