

374 and 375 True-rms AC/DC Clamp Meters

Work horse clamps with increased performance and flexibility

The new Fluke 374 and 375 clamp meters offer improved performance perfect for many current measurement situations. With true-rms ac voltage and current measurements, the Fluke 374 and 375 can read up to 600 V and 600 A in both ac and dc modes. Additionally, both are compatible with the new iFlex™ flexible current probe (sold separately) which expands the measurement range to 2500 A ac and provides increased display flexibility, ability to measure around awkward sized conductors and improved wire access.



New

1000 V CAT III
600 V CAT II

**True
RMS**



Technical Data

Measurement capability

- 600 A ac and dc current measurement with fixed jaw
- 2500 A ac current measurement with iFlex™ flexible current probe (sold separately)
- 600 V ac and dc voltage measurement
- True-rms ac voltage and current for accurate measurements on non-linear signals
- Frequency measurement to 500 Hz with both jaw and iFlex™ (Fluke 375 only)
- Resistance measurement to 60 kΩ (Fluke 375) or 6000 Ω (Fluke 374) with continuity detection
- Min, max, average and inrush recording to capture variations automatically
- 500 mV dc measurement range to interface with other accessories (Fluke 375 only)
- 1000 μF capacitance measurement

Features

- iFlex™ flexible current probe expands the measurement range to 2500 A ac while providing increased display flexibility, ability to measure awkward sized conductors and improved wire access
- CAT IV 600V, CAT III 1000 V safety rating
- Integrated low pass filter (Fluke 375 only) and state of the art signal processing allows for use in noisy electrical environments while providing stable readings

- Proprietary inrush measurement technology to filter out noise and capture motor starting current exactly as the circuit protection sees it
- Ergonomic design fits in your hand and can be used while wearing personal protective equipment
- Large, easy to read, backlight display automatically sets the correct measurement range so you do not need to change switch positions while taking a measurement
- Three-year warranty
- Soft carrying case

Specifications

Fluke 374 and 375	Range	Max Resolution	Accuracy
AC current via jaw	600 A	0.1 A	2 % ± 5 digits
AC current via iFlex™ (optional)	2500 A	0.1 A	3 % ± 5 digits
DC current	600 A	0.1 A	2 % ± 5 digits
AC voltage	600 V	0.1 V	1.5 % ± 5 digits
DC voltage	600 V	0.1 mV (375) 0.1 V (374)	1 % ± 5 digits
Resistance	60,000 Ω (375) 6000 Ω (374)	0.1 Ω	1 % ± 5 digits
Frequency (375 only)	500 Hz	0.1 Hz	0.5 % ± 5 digits
Capacitance	1 µF to 1000 µF	1 µF	1 % ± 4 digits
True-rms		•	
Continuity		•	
Hold		•	
Backlight		•	
Min/Max		•	
Inrush		•	
Low pass filter		Fluke 375 only	
18 in iFlex™ Flexible Current Probe		Optional accessory	
10 in iFlex™ Flexible Current Probe		Optional accessory	
Wire capacity		750 MCM or 2-500 MCM	
Safety rating		CAT III 1000 V, CAT IV 600 V	


Models	Feature Changes
Old model: Fluke 337	
New model: Fluke 376	Includes all 337 features plus: • CAT IV 600 V, CAT III 1000 V • iFlex™ 2500 A ac • 1000 V ac/dc • mV dc • 60 kΩ • 1000 µF
Old model: Fluke 336	
New model: Fluke 375	Includes all 336 features plus: • CAT IV 600 V, CAT III 1000 V • Optional iFlex™ 2500 A ac • mV dc • 60 kΩ • 1000 µF • Min/Max/Avg
New model: Fluke 374	Includes all 336 features (except low pass filter) plus: • CAT IV 600 V, CAT III 1000 V • Optional iFlex™ 2500 A ac • 1000 µF • Min/Max/Avg
Old model: Fluke 335	
New model: Fluke 374	Includes all 335 features plus: • CAT IV 600 V, CAT III 1000 V • Optional iFlex™ 2500 A ac • 600 A ac/dc • 1000 µF • Min/Max/Avg
New model: Fluke 373	Includes all 335 features (except inrush) plus: • CAT IV 300 V, CAT III 600 V • 1000 µF
Old model: Fluke 334	
New model: Fluke 374	Includes all 334 features plus: • CAT IV 600 V, CAT III 1000 V • Optional iFlex™ 2500 A ac • True-rms • 600 A ac/dc • 1000 µF • Min/Max/Avg
New model: Fluke 373	Includes all 334 features (except inrush) plus: • CAT IV 300 V, CAT III 600 V • True-rms • 1000 µF
Old model: Fluke 333	
New model: Fluke 373	Includes all 333 features plus: • CAT IV 300 V, CAT III 600 V • True-rms • 600 A ac • 6000 Ω • 1000 µF

Ordering information

374 True-rms AC/DC Clamp Meter
375 True-rms AC/DC Clamp Meter

Optional accessories

i2500-10 iFlex™ Flexible Current Probe, 10 inches
i2500-18 iFlex™ Flexible Current Probe, 18 inches

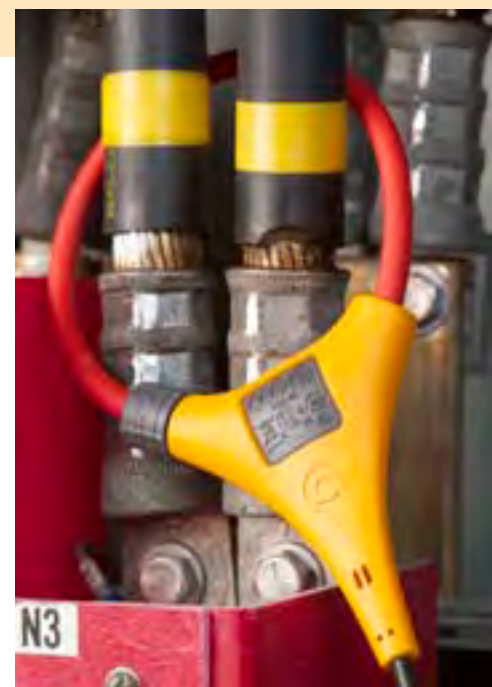

Fluke. *Keeping your world up and running.®*

Fluke Corporation
 PO Box 9090, Everett, WA 98206 U.S.A.

Fluke Europe B.V.
 PO Box 1186, 5602 BD
 Eindhoven, The Netherlands

For more information call:
 In the U.S.A. (800) 443-5853 or
 Fax (425) 446-5116
 In Europe/M-East/Africa +31 (0) 40 2675 200 or
 Fax +31 (0) 40 2675 222
 In Canada (800)-36-FLUKE or
 Fax (905) 890-6866
 From other countries +1 (425) 446-5500 or
 Fax +1 (425) 446-5116
 Web access: <http://www.fluke.com>

©2010 Fluke Corporation.
 Specifications subject to change without notice.
 Printed in U.S.A. 7/2010 3801511B D-EN-N

Modification of this document is not permitted without written permission from Fluke Corporation.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Clamp Multimeters & Accessories](#) category:

Click to view products by [Fluke](#) manufacturer:

Other Similar products are found below :

[FLUKE 1630-2](#) [ZAPDUMOD-03](#) [ZARKMS-01-99](#) [UT233](#) [TESTO 770-3](#) [0590 7703](#) [AX-3550](#) [AX-M266C](#) [BM079](#) [BM089](#) [BM157](#)
[BM162](#) [BM197](#) [KEW2210R](#) [FLUKE 80I-110S](#) [FLUKE A3002FC](#) [FLUKE I200](#) [FLUKE I200S](#) [FLUKE I3000FLEX-24](#) [FLUKE I310S](#)
[CIE600](#) [TESTO 770-2](#) [0590 7702](#) [34194A](#) [KEW2433R](#) [KEW8112](#) [FLUKE 772](#) [380976-K](#) [MA3110](#) [MA440](#) [MA443](#) [MA445](#) [FLUKE-374](#)
[FC](#) [TA74](#) [AMP-320](#) [CM55](#) [CM46](#) [I200](#) [ACD-6 PRO](#) [FLUKE-1630-2FC](#) [CM44](#) [CM42](#) [FLK-A3000 FC](#) [FLUKE-376 FC](#) [MA610](#) [EA30-](#)
[NIST](#) [F201](#) [F205](#) [MA193 \(250 MM\)](#) [DIGIFLEX 4000A 350MM](#) [DIGIFLEX 400A 170MM](#) [DIGIFLEX 400A 250MM](#)