





# *The OHAUS SD Series Shipping Scale – Portability, Durability, OHAUS Quality and Value*

The SD Series is a robust portable bench scale designed specifically with affordability, utility and everyday usage in mind. Ideal for home office, mail room, shipping and receiving, and general commercial and industrial weighing applications, the SD Series features durable painted steel treaded and nontreaded platforms, a remote indicator with two tactile function keys, battery operation and flexible mounting capabilities. The SD Series is your efficient solution to a variety of weighing needs, when you need it, where you need it.

#### Standard Features Include:

- 3 popular capacity models: Standard 35kg, 75kg and Large (L) 200kg
- 2 platform sizes: 316 x 280 mm and 520 x 400 mm
- Maximum displayed resolutions from 1:1750 to 1:2200
- ABS plastic indicator housing with reinforced ribs
- Universal table/wall mounting brackets included
- Flexible coiled cable, extendable
- Painted steel base S models with smooth platform, L models with raised, embossed tread
- Rubber feet (adjustable on L models)
- LCD with fast weight display in kg or lb
- Simple 2 function raised tactile keys
- AC adapter or 360 hour battery operation with Auto-shut off feature
- Calibration in kg or lb
- Carry-handle on carton (non-L models) for ease of portability


## **SD Series** Shipping Scale

Model	SD35	SD75	SD200	SD75L	SD200L
Capacity x Readability	35kg x 0.02kg	75kg x 0.05kg	200kg x 0.1kg	75kg x 0.05kg	200kg x 0.1kg
Maximum Displayed Resolution	1:1750	1:1650	1:2200	1:1650	1:2200
Calibration Weights (fixed)	25kg	50kg	100kg	50kg	100kg
Base Size	316L x 280W x 45H mm			520L x 400W x 75H mm	
Construction	ABS plastic indicator housing and mounting brackets Painted steel base - L models with smooth platform, S models with raised, embossed tread Rubber feet (adjustable on L models)				
Weighing Units	kg, lb				
Application Modes	Weigh, dynamic weighing / display hold				
Linearity / Repeatability	± 1d / 1d (std. dev.)				
Display	1-window, LCD, 20mm high, 4-digit, 7-segment				
Keyboard	2 function raised tactile mechanical switches: [ON/OFF Zero] / [UNITS Cal]				
Stabilization Time	≤ 3 seconds				
Cable Length	Extendable 1.8m / 72" to 2.7m / 108" (full extension)				
Operating Temperature	5° to 40°C / 10%-80% relative humidity, non-condensing				
Power	AC Adapter 9V DC / 100mA or 3 "C" alkaline batteries				
Battery Operating Time	360 hours				
Auto-Shut off	4 minutes with no activity (battery operation only)				
Safe Overload Capacity	150% of capacity				
Indicator Size	210L x 91W x 39H mm				
Shipping Dimensions	380L x 100W x 465H mm			600L x 480V	/ x 230H mm
Net Weight	2.6kg	3	.3kg	14	łkg
Shipping Weight	3.7kg	4	.3kg	16	ikg
Other Features	Calibrate in kg or lb, Calibration lock via internal switch				

### Approvals

- Electrical/Emissions: Meets requirements of approval agencies: UL/CSA (adapter), FCC, CE Safety EN60950, EMC EN61326
- Quality: OHAUS quality management system registered to ISO 9001:2008

#### **Outline Dimensional Drawings**

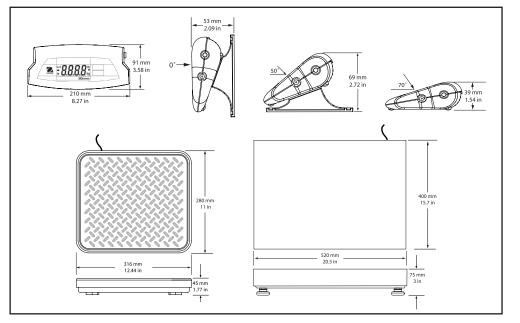

**OHAUS Europe GmbH** Im Langacher 44 8606 Greifensee Switzerland

e-mail: ssc@ohause.com Tel: 0041 22 567 53 19 e-mail: tsc@ohaus.com Tel: 0041 22 567 53 20

**www.ohaus.com** With oces throughout Europe, Asia, and Latin America

**ISO 9001:2008** Registered Quality Management System

80774231\_C © Copyright Ohaus Corporation



### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Tool Kits & Cases category:

Click to view products by Ohaus manufacturer:

Other Similar products are found below :

 AM3310HLX23GXS
 229668-1
 217434-1
 QB-78K0RKE3L-TB
 4263
 1055420-1
 11-18-3023
 63860-8170
 856600-2
 11-40-3247
 63883 

 2870
 63866-1070
 63865-5170
 63863-5070
 63892-7370
 11-18-3209
 63860-4070
 63881-0970
 A0403641
 11-18-3040
 63865-2070
 63910 

 1470
 11-11-0387
 63850-7470
 11-18-3201
 63910-7570
 FM 0501
 146
 63883-0670
 63830-0070
 63901-2670
 11-18-3147
 11-18-3079
 63883 

 2670
 63900-1770
 11-18-3190
 63851-1070
 63912-4770
 63911-5270
 63895-1070
 63860-1470
 63850-6070
 1-69411-3
 63852-9270
 63802 

 6270
 11-18-3202
 63852-9170
 63830-0170
 11-18-3016
 63910-2870
 11-18-3010
 63850-1070
 63830-0170
 11-18-3016
 63910-2870