



BUS Cables

DeviceNet™ high flexible thick + thin

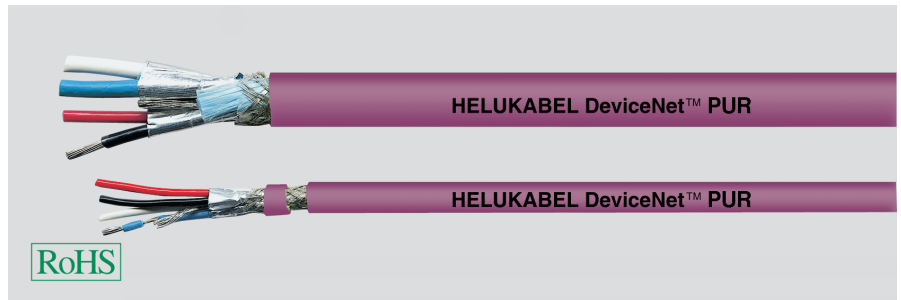

PUR, high flexible



Type Cable structure

Inner conductor diameter 1:
Inner conductor diameter 2:
Core insulation 1:
Core insulation 2:
Core colours 1:
Core colours 2:
Stranding element 1:
Separator:
Shielding 1:
Total shielding:
Drain wire:
Outer sheath material:
Cable external diameter:
Outer sheath colour:

Drag Chain applications 1x2xAWG18 + 1x2xAWG15

Copper, tinned (AWG 18/40)
Copper, tinned (AWG 15/84)
Cell PE
PE
light bu, wh
rd, bk
Double core
-
Al-Foil
Cu braid, tinned
yes
PUR
app. 12,2 mm ± 0,3 mm
Violet similar to RAL 4001

Drag Chain applications 1x2xAWG24 + 1x2xAWG22

Copper, tinned (AWG 24/19)
Copper, tinned (AWG 22/19)
Cell PE
PE
light bu, wh
rd, bk
Double core
-
Al-Foil
Cu braid, tinned
yes
PUR
app. 6,9 mm ± 0,3 mm
Violet similar to RAL 4001

Electrical data

Characteristic impedance:
Conductor resistance, max.:
Insulation resistance, min.:
Loop resistance:
Mutual capacitance:
Test voltage:
Attenuation:

120 Ohm ± 10 %
22,6 Ohm/km
0,2 GOhm x km
45 Ohm/km max.
39,8 nF/km nom.
2 kV
125 kHz < 4.1 dB/km
500 kHz < 8.2 dB/km

120 Ohm ± 10 %
90 Ohm/km
0,2 GOhm x km
45 Ohm/km max.
39,8 nF/km nom.
2 kV
125 kHz < 9.5 dB/km
500 kHz < 16.4 dB/km

Technical data

Weight:
bending radius, repeated:
Operating temperature range min.:
Operating temperature range max.:
Caloric load, approx. value:
Copper weight:

app. 185 kg/km
61 mm
-40°C
+80°C
2,54 MJ/m
90,00 kg/km

app. 68 kg/km
70 mm
-40°C
+80°C
0,76 MJ/m
35,00 kg/km

Norms

Applicable standards:

ODVA DeviceNet
Halogen-free acc. to 60754-2
Flame-retardant acc. to EN 50265-2-1
CMX 75°C CL2X

ODVA DeviceNet
Halogen-free acc. to 60754-2
Flame-retardant acc. to EN 50265-2-1
CMX 75°C CL2X

Application

HELUKABEL® DeviceNet™ PUR highly flexible for use in cable carriers with outstanding resistance to common coolants/lubricants. The special aspect of this bus system is that a data pair and a power supply pair are **always** integrated in one cable. The small cross-section is used for short distances or as a point-to-point connection; the large cross-section as main conductor for long distances and frequently in combination with the thin conductor as drain wire.

Part no.

81909, DeviceNet PUR

81910, DeviceNet PUR

Dimensions and specifications may be changed without prior notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Multi-Paired Cables](#) category:

Click to view products by [Helukabel](#) manufacturer:

Other Similar products are found below :

[7-21000-9](#) [9805 060100](#) [1213 009U1000](#) [1416402/M12MS/IP20/10](#) [9804 060100](#) [9808 060100](#) [9843 060100](#) [9873 060100](#) [190-038045-00](#)
[44A0121-12-996CS2275](#) [44A0121-20-09-MX](#) [55PC0211-14-9](#) [55PC0216-24-9](#) [55PC0221-22-2/6CS2756](#) [55PC0811-16-9](#) [55PC0811-24-9](#)
[55PC1131-20-029-9](#) [Y60912](#) [CW1922-000](#) [RI55D](#) [9157 060100](#) [2020D0309-0](#) [9774 060100](#) [8334 060100](#) [1350SB 0101000](#) [2412 0061000](#)
[8342 060100](#) [8740 060U1000](#) [9505 060U1000](#) [3613 003A1000](#) [44A0121-22-0/9-MX](#) [2412 009U1000](#) [82777 8771000](#) [9406 T35100](#) [2413](#)
[002A1000](#) [3613 D151000](#) [1533R 0101000](#) [1533P 0101000](#) [9272 006U1000](#) [2413F D15A500](#) [9681 0601000](#) [1533R 0061000](#) [RIT1000](#)
[1533R 006A1000](#) [9812 060100](#) [2221 B59U1000](#) [10GX13 D151000](#) [1874A 004A1000](#) [8340 060100](#) [8333 0601000](#)