




(1,00 mm) .0394"

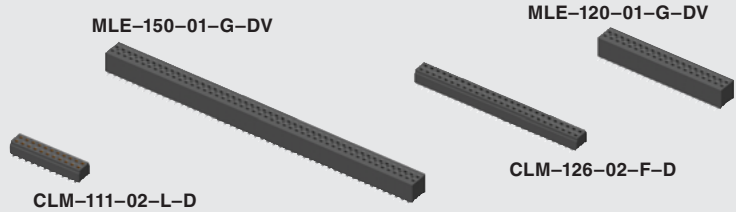

CLM, MLE SERIES

RUGGED RELIABLE MICRO SOCKETS

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?CLM or www.samtec.com?MLE

Insulator Material:

Black LCP

Contact Material:

CLM: Phosphor Bronze
MLE: BeCu

Plating:

CLM: Au or Sn over 50µ" (1,27 µm) Ni
MLE: Au over 10µ" (0,25 µm) Ni

Current Rating (CLM/FTM):

2.8 A per pin (1 pin powered per row)

Current Rating (MLE/FTM):

2.9 A per pin (1 pin powered per row)

Operating Temp Range:

-55°C to +125°C

Contact Resistance:

CLM: 15 mΩ

Max Cycles:

CLM: 100 with 10µ" (0,25 µm) Au

Voltage Rating:

MLE: 310 VAC

Insertion Depth:

CLM: Top Entry = (1,40 mm)

.055" min., Bottom Entry = (2,41 mm) .095" min.

(Add board thickness for correct post OAL)

MLE: (1,63 mm) .064" to (3,18 mm) .125" with (0,38 mm) .015" wiper, pass-through, or (2,44 mm) .096" minimum for bottom entry

Insertion Force:

CLM: 1.5 oz (0,42 N) average

MLE: 2.70 oz (0,75 N) average

Normal Force:

CLM: 40 grams (0,39 N) average

Withdrawal Force: CLM: .75 oz (0,21 N) average

MLE: 0.50 oz (0,14 N) average

RoHS Compliant: Yes

Lead-Free Solderable: Yes

SMT Lead Coplanarity:

(0,10 mm) .004" max (02-25)

(0,15 mm) .006" max (26-50)

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality




Note: Some lengths, styles and options are non-standard, non-returnable.



Mates with: FTM, FTMH, MW

02 thru 50

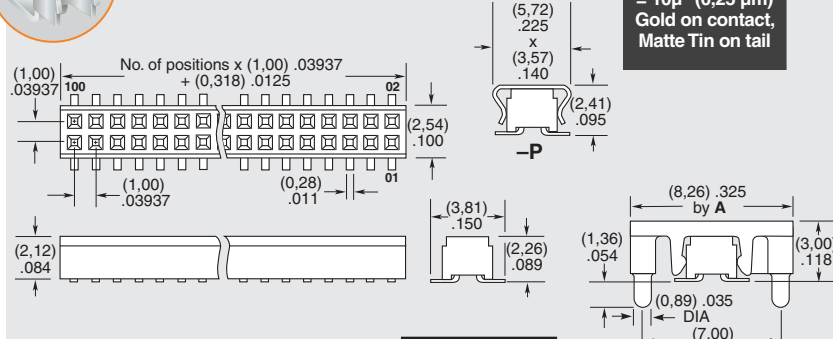

-F
= Gold flash on contact, Matte Tin on tail

-L
= 10µ" (0,25 µm) Gold on contact, Matte Tin on tail


-BE
= Bottom Entry (Required for bottom entry)

-K
= (3,50 mm) .138" DIA Polyimide film Pick & Place Pad (7 positions minimum)

-P
= Pick & Place Pad (7 positions minimum)

-PA
= Pick & Place Pad with integral Alignment Pin

-TR
= Tape & Reel Packaging



PIN/ROW	A
04-15	(3,56) .140
16-50	(7,11) .280


ALSO AVAILABLE (MOQ Required)

- Alignment pin
 - Other Gold plating options
- Contact Samtec.



Mates with: FTM, FTMH, MW

02 thru 50

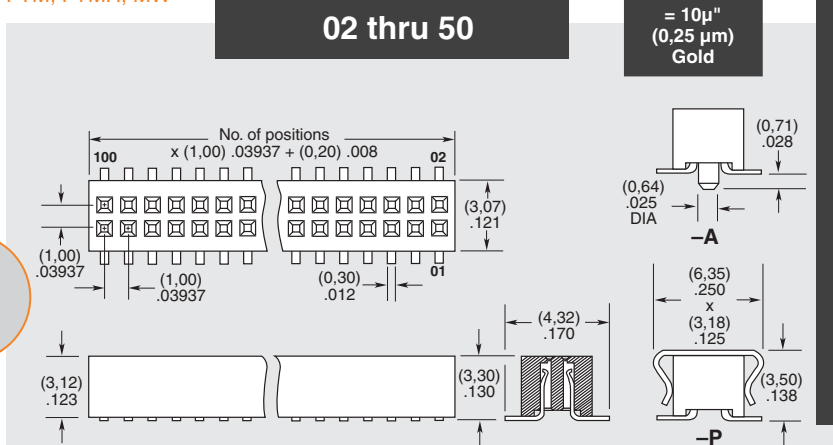

-G
= 10µ" (0,25 µm) Gold

-A
= Alignment Pin (3 positions minimum) Metal or plastic at Samtec discretion.

-K
= (4,00 mm) .1575" DIA Polyimide film Pick & Place Pad (5 positions minimum)

-P
= Metal Pick & Place Pad (5 positions minimum)

-TR
= Tape & Reel Packaging

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [000-34000](#) [0009482033](#) [0009507031](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [647662-1](#) [65039-019ELF](#) [65781-047](#) [65817-002LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67016-026LF](#) [67046-001LF](#) [67095-007LF](#)