


Product availability: Stock - Normally stocked in distribution facility

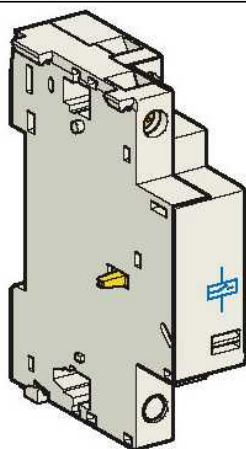

### Main

Commercial Status	Commercialised
Range of product	TeSys GV2 TeSys GV3
Device short name	GVAS
Product or component type	Shunt trip
Product compatibility	GV2L GV2LE GV2ME GV2P GV3L GV3P

### Complementary

Control circuit voltage	110...115 V AC 60 Hz
Control circuit voltage limits	0.7...1.1 Un
[Ui] rated insulation voltage	600 V AC CSA C22.2 No 14 690 V AC IEC 60947-1 600 V AC UL 508
Threshold tripping voltage	0.75...0.2 Un
Inrush power in VA	14 VA AC
Inrush power in W	10.5 W DC
Hold-in power consumption in VA	5 VA AC
Hold-in power consumption in W	1.6 W DC
Operating time	10...15 ms IEC 60947-1
On-load factor	100 %
Connections - terminals	Screw clamp terminals 2 0...0 in <sup>2</sup> (0.75...1.5 mm <sup>2</sup> ) flexible with Screw clamp terminals 1 0...0 in <sup>2</sup> (0.75...1.5 mm <sup>2</sup> ) flexible with Screw clamp terminals 2 0...0 in <sup>2</sup> (0.75...2.5 mm <sup>2</sup> ) flexible without Screw clamp terminals 1 0...0 in <sup>2</sup> (1...2.5 mm <sup>2</sup> ) solid Screw clamp terminals 1 0...0 in <sup>2</sup> (0.75...2.5 mm <sup>2</sup> ) flexible without
Tightening torque	<= 12.39 lbf.in (1.4 N.m) screw clamp terminals
Mechanical durability	30000 cycles with GV2ME and GV2P 10000 cycles with GV3P and GV3L
Quantity per set	Set of 10
Product weight	0.23 lb(US) (0.105 kg)

### Ordering and shipping details

Category	22367 - MANUAL STR PROTECTOR - GV2
Discount Schedule	I11
GTIN	00785901343691
Nbr. of units in pkg.	1
Package weight(Lbs)	0.28
Product availability	Stock - Normally stocked in distribution facility
Returnability	Y
Country of origin	CZ

### Contractual warranty

Period	18 months
--------	-----------

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Circuit Breaker Accessories](#) category:*

*Click to view products by [Schneider](#) manufacturer:*

Other Similar products are found below :

[CSC-403PS](#) [8T1-D-11A](#) [B151-7184-L](#) [NEB10](#) [8C1-C-721](#) [8T1-E-115](#) [8T1-E-275](#) [8T1-E-278](#) [4-1393247-8](#) [4-1393247-9](#) [506-11315-001](#)  
[3803221](#) [3803231](#) [NEB6](#) [X10506BF](#) [NES](#) [9-1393249-0](#) [802-ESB50UL489](#) [3RV2011-1CA15](#) [607.5689.127](#) [30.329](#) [CA707/TS/01](#)  
[11-32-2733](#) [X10508BF](#) [X22261102](#) [975090700](#) [CX2.5/4/O](#) [975090701](#) [PS-2P](#) [Y30019003](#) [C-TEC1225 P](#) [PS-1006](#) [618.6335.069](#)  
[975455700](#) [BAC03](#) [930727103](#) [934097101](#) [ZG20-1](#) [934097100](#) [JX2.5/4](#) [KEM380CUL](#) [CC848756916](#) [JX2.5/6](#) [JX2.5/5](#) [HSP6/10U](#)  
[DMRBU BLACK BOX](#) [DB16/BU](#) [DB16/BL](#) [CM2.5S2](#) [973604100](#)