



ELECTRONICS, INC.
 44 FARRAND STREET
 BLOOMFIELD, NJ 07003
 (973) 748-5089

NTE2554 (NPN) & NTE2555 (PNP) Silicon Complementary Transistors Darlington Driver

Applications:

- Industrial Equipment
- Printers
- Typewriters
- Sewing Machines
- Recorders
- Computers
- Igniters
- Car Coolers
- Projectors
- Players
- Stereos
- Home Appliances
- Audio Equipment
- ECRs


Absolute Maximum Ratings: ($T_A = +25^\circ\text{C}$ unless otherwise specified)

Collector–Base Voltage, V_{CBO}	70V
Collector–Emitter Voltage, V_{CEO}	60V
Emitter–Base Voltage, V_{EBO}	6V
Collector Current, I_C	7A
Collector Power Dissipation ($T_C = +25^\circ\text{C}$), P_C	35W
Operating Junction Temperature, T_J	+150°C
Storage Temperature Range, T_{stg}	–55° to +150°C




Electrical Characteristics: ($T_A = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
DC Current Gain	h_{FE}	$V_{CE} = 2V, I_C = 3.5A$	2000	–	–	
Collector–Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 3.5A, I_B = 7mA$	–	–	1.5	V
Transition Frequency	f_T		–	20	–	MHz

**NTE2554
(NPN)**

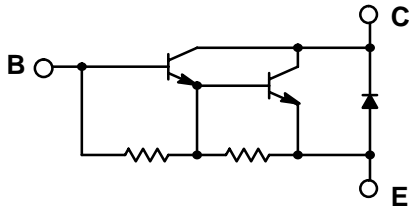

**NTE2555
(PNP)**

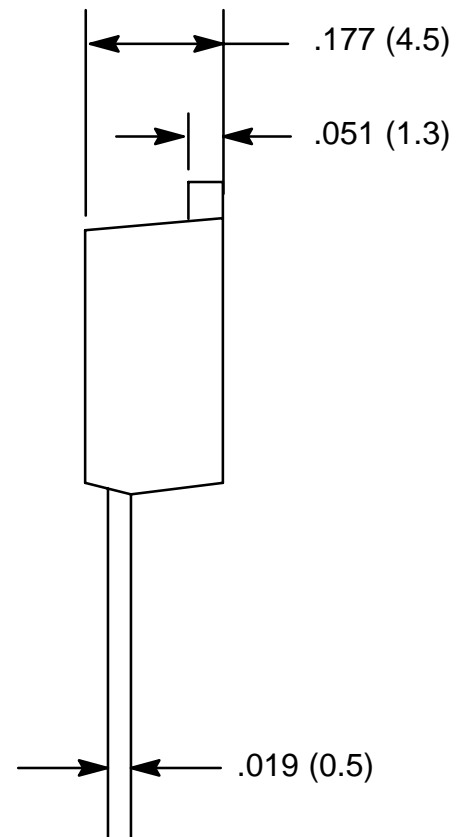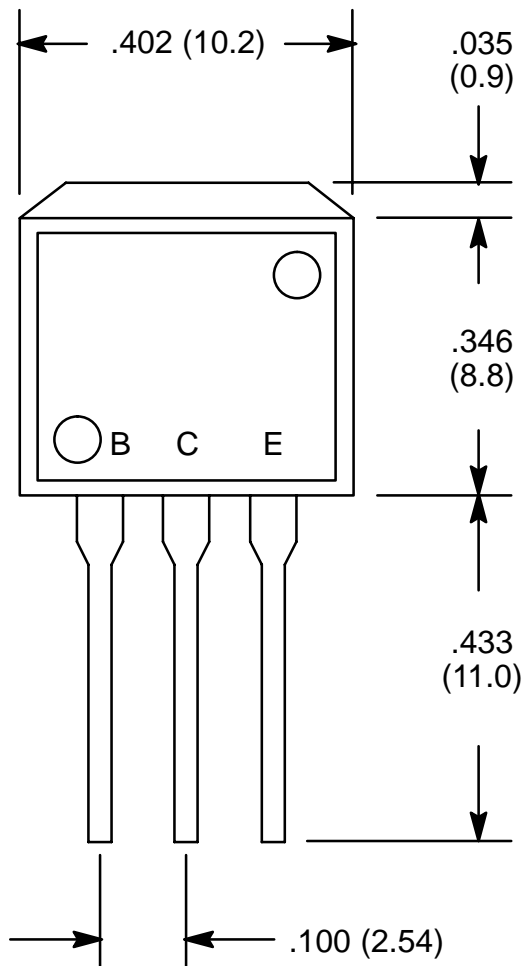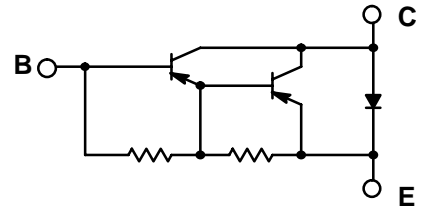

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Darlington Transistors](#) category:

Click to view products by [NTE manufacturer](#):

Other Similar products are found below :

[281287X](#) [SMMBT6427LT1G](#) [2N7371](#) [BDV64B](#) [JANTXV2N6287](#) [028710A](#) [SMMBTA64LT1G](#) [2N6350](#) [2SB1214-TL-E](#)
[SMMBTA14LT1G](#) [SBSP52T1G](#) [NJVMJD117T4G](#) [Jantx2N6058](#) [2N6353](#) [LB1205-L-E](#) [500-00005](#) [2N6053](#) [NJVMJD112G](#) [Jan2N6350](#)
[Jantx2N6352](#) [Jantx2N6350](#) [BULN2803LVS](#) [ULN2001N](#) [2SB1383](#) [2SB1560](#) [2SB852KT146B](#) [TIP112TU](#) [TIP122TU](#) [BCV27](#) [MMBTA13-](#)
[TP](#) [MMBTA14-TP](#) [MMSTA28T146](#) [BSP50H6327XTSA1](#) [KSH122TF](#) [NTE2557](#) [NJVNJD35N04T4G](#) [TIP115](#) [MPSA29-D26Z](#) [MJD127T4](#)
[FJB102TM](#) [BCV26E6327HTSA1](#) [BCV46E6327HTSA1](#) [BCV47E6327HTSA1](#) [BSP61H6327XTSA1](#) [BU941ZPFI](#) [2SB1316TL](#) [2SD1980TL](#)
[NTE2350](#) [NTE245](#) [NTE246](#)