



ELECTRONICS, INC.
 44 FARRAND STREET
 BLOOMFIELD, NJ 07003
 (973) 748-5089

NTE265 Silicon NPN Transistor Darlington Power Amplifier

Features:

- Forward Current Transfer Ratio: $h_{FE} = 10,000$ Min
- Power Dissipation: 1.33W Free-Air @ $T_A = +50^\circ\text{C}$
- Hard Solder Mountdown

Applications:

- Driver, IC Driver
- Regulator
- Touch Switch
- Audio Output
- Relay Substitute
- Oscillator
- Servo-Amplifier
- Capacitor Multiplier

Absolute Maximum Ratings: ($T_A = +25^\circ\text{C}$ unless otherwise specified)

Collector-to-Emitter Voltage, V_{CEO}	50V
Collector-to-Emitter Voltage, V_{CES}	50V
Emitter-to-Base Voltage, V_{EBO}	13V
Collector Current (Note 1), I_C	
Continuous	0.5A
Peak	1.0A
Power Dissipation, P_D	
$T_C = +25^\circ\text{C}$ (Note 2)	6.25W
$T_C = +70^\circ\text{C}$	4W
$T_A = +50^\circ\text{C}$	
With Tab	1.33W
Without Tab	1W
Thermal Resistance, Junction-to-Case (Note 2), $R_{\theta JC}$	20°C/W
Thermal Resistance, Junction-to-Ambient (Note 2), $R_{\theta JA}$	
With Tab	75°C/W
Without Tab	100°C/W
Operating Junction Temperature range (Note 2), T_J	-55° to +150°C
Storage Temperature range (Note 2), T_{stg}	-55° to +150°C
Lead Temperature (During Soldering, 1/16" from case, 10sec Max, Note 2), T_L	+260°C


Note 1. Pulse Test: Pulse Width = 25ms, Duty Cycle = 50%

Note 2. Tab temperature is measured on center of tab, 1/16" from plastic body.

Electrical Characteristics: ($T_A = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Forward Current Transfer Ratio	h_{FE}	$I_C = 200\text{mA}, V_{CE} = 5\text{V}$	10k	–	60k	
	h_{fe}	$I_C = 20\text{mA}, V_{CE} = 5\text{V}, f = 1\text{kHz}$	–	10k	–	
Collector-to-Emitter Voltage	V_{CEO}	$I_C = 10\text{mA}$	50	–	–	V
Collector Saturation Voltage	$V_{CE(sat)}$	$I_C = 500\text{mA}, I_B = 0.5\text{mA}$, Note 3	–	–	1.5	V
Base Saturation Voltage	$V_{BE(sat)}$	$I_C = 500\text{mA}, I_B = 0.5\text{mA}$, Note 3	–	–	2.0	V
Collector Cutoff Current	I_{CES}	$V_{CE} = 50\text{V}, T_J = +25^\circ\text{C}$	–	–	0.5	μA
	I_{CBO}	$V_{CE} = 50\text{V}, T_J = +150^\circ\text{C}$	–	–	20	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = 13\text{V}$	–	–	0.1	μA
Input Impedance	h_{ie}	$I_C = 20\text{mA}, V_{CE} = 5\text{V}, f = 1\text{kHz}$	50	500	–	Ω
Collector Capacitance	C_{cbo}	$V_{CB} = 10\text{V}, f = 1\text{MHz}$	–	5	10	pF
Gain Bandwidth Product	f_T	$V_{CE} = 5\text{V}, I_C = 20\text{mA}$	–	75	–	MHz
Delay Time and Rise Time	$t_d + t_r$	$I_C = 1\text{A}, I_{B1} = 1\text{mA}$	–	100	–	ns
Storage Time	t_s	$I_C = 1\text{A}, I_{B1} = I_{B2} = 1\text{mA}$	–	350	–	ns
Fall Time	t_f	$I_C = 1\text{A}, I_{B1} = I_{B2} = 1\text{mA}$	–	800	–	ns

Note 3. Pulsed measurement: Pulse Width = $300\mu\text{s}$, Duty Cycle $\leq 2\%$.

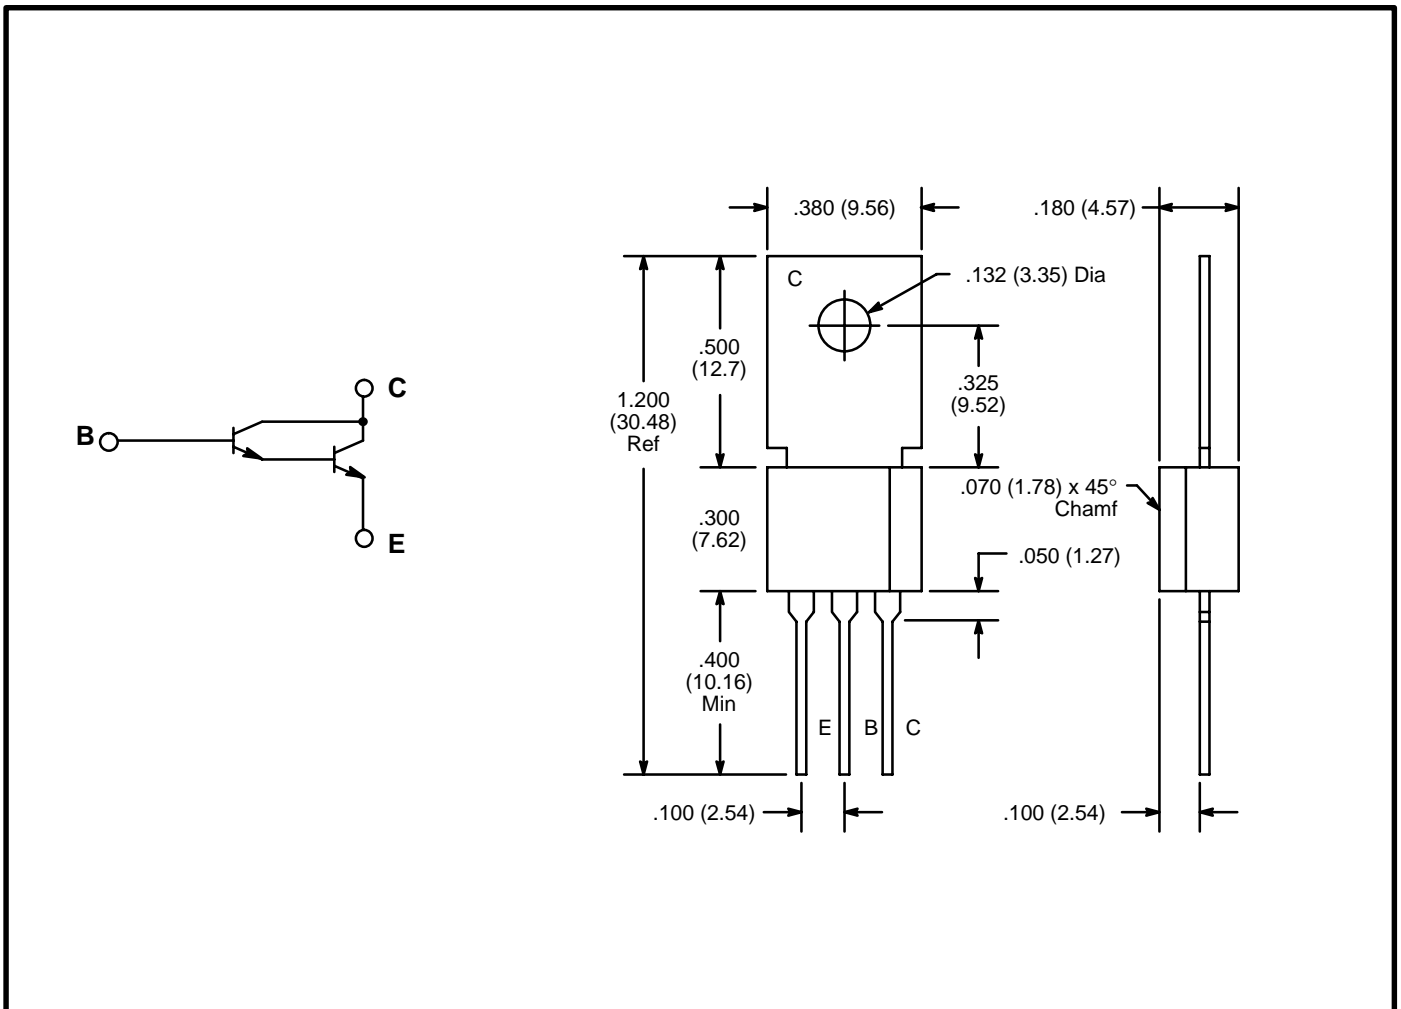

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Darlington Transistors](#) category:

Click to view products by [NTE manufacturer](#):

Other Similar products are found below :

[281287X](#) [SMMBT6427LT1G](#) [2N7371](#) [BDV64B](#) [JANTXV2N6287](#) [028710A](#) [SMMBTA64LT1G](#) [2N6350](#) [2SB1214-TL-E](#)
[SMMBTA14LT1G](#) [SBSP52T1G](#) [NJVMJD117T4G](#) [Jantx2N6058](#) [2N6353](#) [LB1205-L-E](#) [500-00005](#) [2N6053](#) [NJVMJD112G](#) [Jan2N6350](#)
[Jantx2N6352](#) [Jantx2N6350](#) [BULN2803LVS](#) [ULN2001N](#) [2SB1383](#) [2SB1560](#) [2SB852KT146B](#) [TIP112TU](#) [TIP122TU](#) [BCV27](#) [MMBTA13-](#)
[TP](#) [MMBTA14-TP](#) [MMSTA28T146](#) [BSP50H6327XTSA1](#) [KSH122TF](#) [NTE2557](#) [NJVNJD35N04T4G](#) [TIP115](#) [MPSA29-D26Z](#) [MJD127T4](#)
[FJB102TM](#) [BCV26E6327HTSA1](#) [BCV46E6327HTSA1](#) [BCV47E6327HTSA1](#) [BSP61H6327XTSA1](#) [BU941ZPFI](#) [2SB1316TL](#) [2SD1980TL](#)
[NTE2350](#) [NTE245](#) [NTE246](#)