



**ELECTRONICS, INC.**  
 44 FARRAND STREET  
 BLOOMFIELD, NJ 07003  
 (973) 748-5089

## NTE962 Integrated Circuit 3-Terminal Positive Voltage Regulator, 6V

The NTE962 fixed-voltage regulator is a monolithic integrated circuit in a TO220 type package designed for use in a wide variety of applications including local, on-card regulation. This regulator employs internal current limiting, thermal shutdown, and safe-area compensation. With adequate heat-sinking it can deliver output currents in excess of 1.0 ampere. Although designed primarily as a fixed voltage regulator, this device can be used with external components to obtain adjustable voltages and currents.

### Features:

- Output Current in Excess of 1.0 Ampere
- No External Components Required
- Internal Thermal Overload Protection
- Internal Short-Circuit Current Limiting
- Output Transistor Safe-Area Compensation

### Absolute Maximum Ratings: ( $T_A = +25^\circ\text{C}$ unless otherwise specified)

Input Voltage, $V_{in}$ .....	35Vdc
Power Dissipation ( $T_A = +25^\circ\text{C}$ ), $P_D$ .....	Internally Limited
Derate above $+25^\circ\text{C}$ .....	15.4mW/ $^\circ\text{C}$
Power Dissipation ( $T_C = +25^\circ\text{C}$ ), $P_D$ .....	Internally Limited
Derate above $+75^\circ\text{C}$ .....	200mW/ $^\circ\text{C}$
Thermal Resistance, Junction-to-Ambient, $R_{thJA}$ .....	65 $^\circ\text{C}/\text{W}$
Thermal Resistance, Junction-to-Case, $R_{thJC}$ .....	5 $^\circ\text{C}/\text{W}$
Operating Junction Temperature Range, $T_J$ .....	-55 $^\circ$ to +150 $^\circ\text{C}$
Storage Junction Temperature Range, $T_{stg}$ .....	-65 $^\circ$ to +150 $^\circ\text{C}$


### Electrical Characteristics: ( $V_{in} = 11\text{V}$ , $I_O = 500\text{mA}$ , $T_J = 0^\circ$ to $+125^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit	
Output Voltage	$V_O$	$T_J = +25^\circ\text{C}$	5.75	6.0	6.25	V	
		$5\text{mA} \leq I_O \leq 1\text{A}$ , $P_O \leq 15\text{W}$ , $8\text{V} \leq V_{in} \leq 21\text{V}$	5.7	6.0	6.3	V	
Line Regulation	$\text{Reg}_{line}$	$T_J = +25^\circ\text{C}$ , Note 1	$8\text{V} \leq V_{in} \leq 25\text{V}$	-	9	120	mV
			$9\text{V} \leq V_{in} \leq 13\text{V}$	-	3	60	mV
Load Regulation	$\text{Reg}_{load}$	$T_J = +25^\circ\text{C}$ , Note 1	$5\text{mA} \leq I_O \leq 1.5\text{A}$	-	43	120	mV
			$250\text{mA} \leq I_O \leq 750\text{mA}$	-	16	60	mV

Note 1. Load and line regulation are specified at constant junction temperature. Changes in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

**Electrical Characteristics (Cont'd):** ( $V_{in} = 11V$ ,  $I_O = 500mA$ ,  $T_J = 0^\circ$  to  $+125^\circ C$  unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Quiescent Current	$I_B$	$T_J = +25^\circ C$	-	4.3	8.0	mA
Quiescent Current Change	$\Delta I_B$	$8V \leq V_{in} \leq 25V$	-	-	1.3	mA
		$5mA \leq I_O \leq 1A$	-	-	0.5	mA
Ripple Rejection	RR	$9V \leq V_{in} \leq 19V$ , $f = 120Hz$	-	65	-	dB
Dropout Voltage	$V_{in} - V_O$	$T_J = +25^\circ C$ , $I_O = 1A$	-	2	-	V
Output Noise Voltage	$V_n$	$T_A = +25^\circ C$ , $10Hz \leq f \leq 100kHz$	-	10	-	$\mu V/V_O$
Output Resistance	$r_O$	$f = 1kHz$	-	17	-	$m\Omega$
Short-Circuit Current Limit	$I_{sc}$	$T_A = +25^\circ C$ , $V_{in} = 35V$	-	0.2	-	A
Peak Output Current	$I_{max}$	$T_J = +25^\circ C$	-	2.2	-	A
Average Temperature Coefficient of Output Voltage	$TCV_O$		-	-0.8	-	$mV/^\circ C$

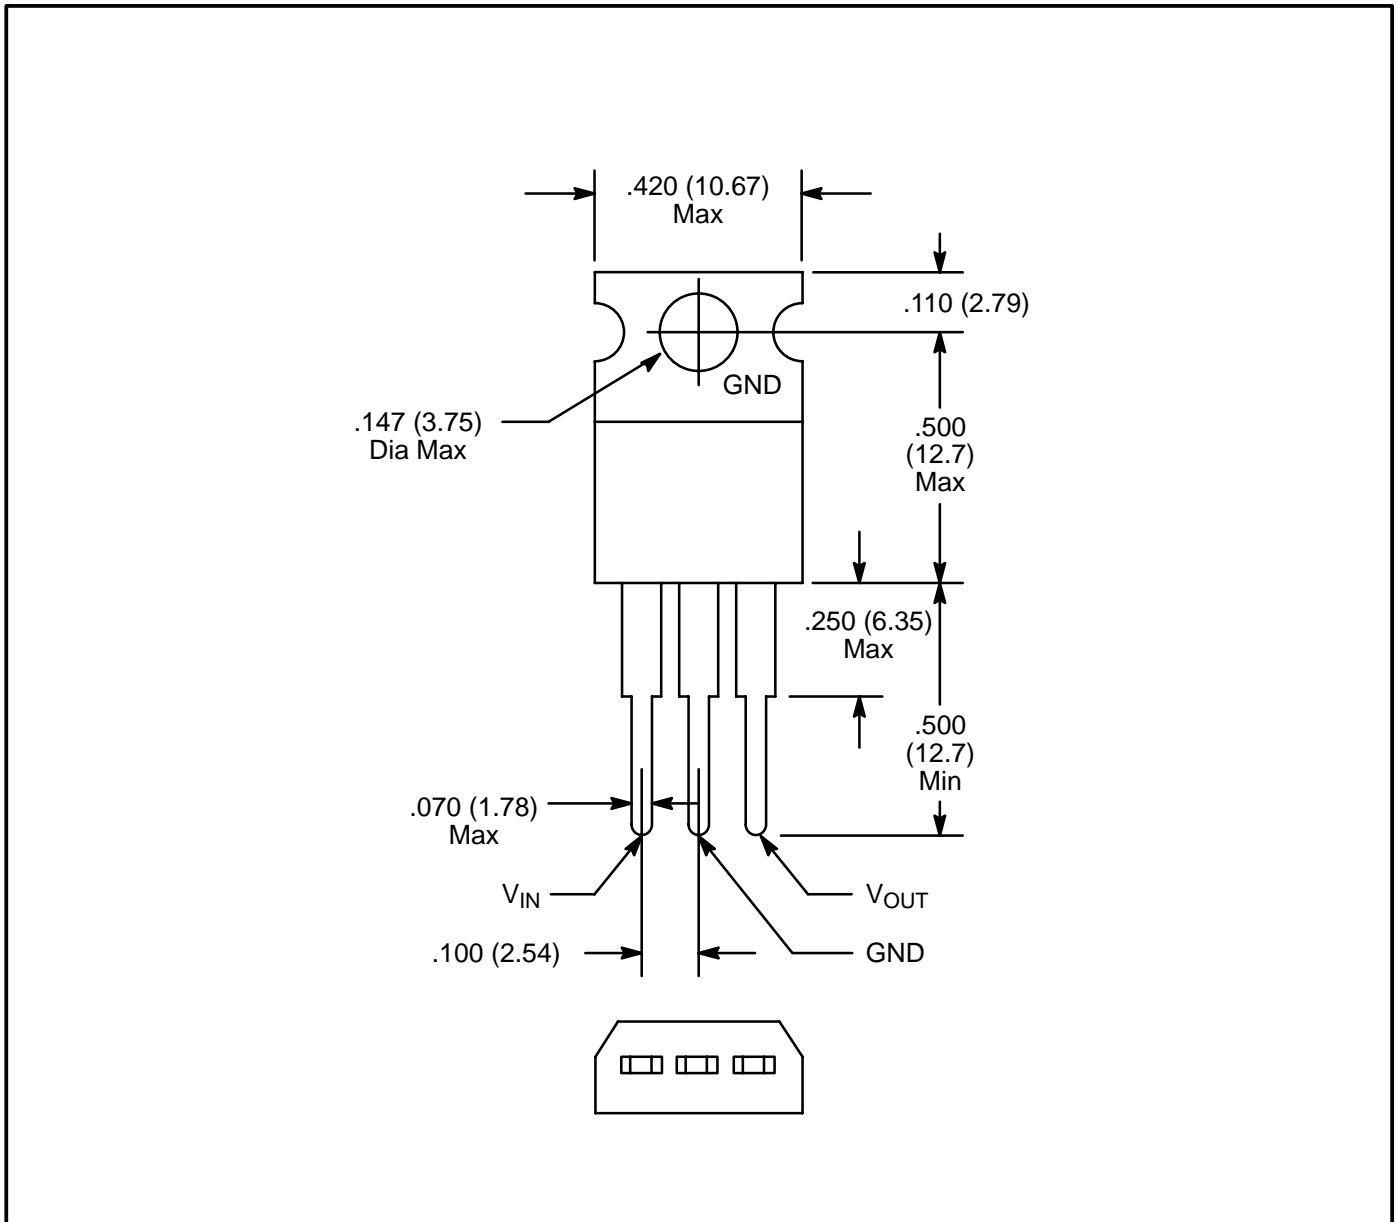

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Linear Voltage Regulators](#) category:*

*Click to view products by [NTE manufacturer](#):*

Other Similar products are found below :

[LV56831P-E](#) [LV5684PVD-XH](#) [MAX202ECWE-LF](#) [MCDTSA6-2R](#) [L4953G](#) [L7815ACV-DG](#) [PQ3DZ53U](#) [LV56801P-E](#)  
[TCR3DF13,LM\(CT](#) [TCR3DF39,LM\(CT](#) [TLE42794G](#) [L78L05CZ/1SX](#) [L78LR05DL-MA-E](#) [L78MR05-E](#) [033150D](#) [033151B](#) [090756R](#)  
[636416C](#) [NCV78M15BDTG](#) [702482B](#) [714954EB](#) [TLE42794GM](#) [TLE42994GM](#) [ZMR500QFTA](#) [BA033LBSG2-TR](#)  
[NCV78M05ABDTRKG](#) [NCV78M08BDTRKG](#) [NCP7808TG](#) [NCV571SN12T1G](#) [LV5680P-E](#) [CAJ24C256YI-GT3](#) [L78M15CV-DG](#) [L9474N](#)  
[TLS202B1MBV33HTSA1](#) [L79M05T-E](#) [NCP571SN09T1G](#) [MAX15006AASA/V+](#) [MIC5283-5.0YML-T5](#) [L4969URTR-E](#) [L78LR05D-MA-E](#)  
[NCV7808BDTRKG](#) [L9466N](#) [NCP7805ETG](#) [SC7812CTG](#) [NCV7809BTG](#) [NCV571SN09T1G](#) [NCV317MBTG](#) [MC78M15CDTT5G](#)  
[MC78M12CDTT5G](#) [L9468N](#)