

## NTE963 Linear Integrated Circuit Voltage Regulator, Negative, -6V, 1A

**Description:**

The NTE963 voltage regulator employs current limiting, thermal shutdown, and safe-area compensation which makes it remarkably rugged under most operating conditions. With adequate heat-sinking they can deliver output currents in excess of 1.0 amperes.

**Features:**

- No External Components Required
- Internal Thermal Overload Protection
- Internal Short-Circuit Current Limiting
- Output Transistor Safe-Area Compensation

**Absolute Maximum Ratings:** ( $T_A = +25^\circ\text{C}$  unless otherwise specified)


Input Voltage, $V_{IN}$ .....	-35V
Internal Power Dissipation, $P_D$ .....	Internally Limited
Derate Above $+25^\circ\text{C}$ .....	15.4mW/ $^\circ\text{C}$
Thermal Resistance, Junction-to-Ambient, $R_{thJA}$ .....	65 $^\circ\text{C}/\text{W}$
Internal Power Dissipation ( $T_C = +25^\circ\text{C}$ ), $P_D$ .....	Internally Limited
Derate Above $+75^\circ\text{C}$ .....	200mW/ $^\circ\text{C}$
Thermal Resistance, Junction-to-Ambient ( $T_C = +25^\circ\text{C}$ ), $R_{thJA}$ .....	5 $^\circ\text{C}/\text{W}$
Maximum Junction Temperature Range, $T_J$ .....	0 $^\circ$ to $+150^\circ\text{C}$
Storage Temperature Range, $T_{stg}$ .....	-65 $^\circ$ to $+150^\circ\text{C}$

**Electrical Characteristics:** ( $V_{IN} = -11\text{V}$ ,  $I_O = 500\text{mA}$ ,  $0^\circ\text{C} \leq T_J \leq +125^\circ\text{C}$  unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit	
Output Voltage	$V_O$	$T_J = +25^\circ\text{C}$	-5.75	-6.0	-6.25	V	
		$5\text{mA} \leq I_O \leq 1\text{A}$ , $P_O \leq 15\text{W}$ , $-8.0\text{V} \leq V_{IN} \leq -21\text{V}$	-5.7	-	-6.3	V	
Line Regulation	$\text{Reg}_{Line}$	$T_J = +25^\circ\text{C}$	$-8.0\text{V} \leq V_{IN} \leq -25\text{V}$	-	43	120	mV
			$-9.0\text{V} \leq V_{IN} \leq -13\text{V}$	-	10	60	

**Electrical Characteristics:** ( $V_{IN} = -11V$ ,  $I_O = 500mA$ ,  $0^{\circ}C \leq T_J \leq +125^{\circ}C$  unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Load Regulation	Reg <sub>Load</sub>	$T_J = +25^{\circ}C$				
		$5mA \leq I_O \leq 1.5A$	–	13	120	mV
		$250mA \leq I_O \leq 750mA$	–	5.0	60	
Quiescent Current	$I_B$	$T_J = +25^{\circ}C$	–	4.3	8.0	mA
Quiescent Current Change	$\Delta I_B$	$-8.0V \leq V_{IN} \leq -25V$	–	–	1.3	mA
		$5mA \leq I_O \leq 1A$	–	–	0.5	
Ripple Rejection	RR	$9.0V \leq V_{IN} \leq 19.0V$ , $f = 120Hz$	–	65	–	dB
Dropout Voltage	$V_{IN} - V_O$	$T_J = +25^{\circ}C$ , $I_O = 1A$	–	2.0	–	V
Output Noise Voltage	$V_n$	$T_A = +25^{\circ}C$ , $10Hz \leq f \leq 100kHz$	–	45	–	$\mu V/V_O$
Output Resistance	$r_O$	$f = 1kHz$	–	17	–	$m\Omega$
Short-Circuit Current Limit	$I_{sc}$	$T_A = +25^{\circ}C$ , $V_{IN} = 35V$	–	0.2	–	A
Peak Output Current	$I_{max}$	$T_J = +25^{\circ}C$	–	2.2	–	A
Average Temperature Coefficient of Output Voltage	$TCV_O$		–	-1.0	–	$mV/^{\circ}C$

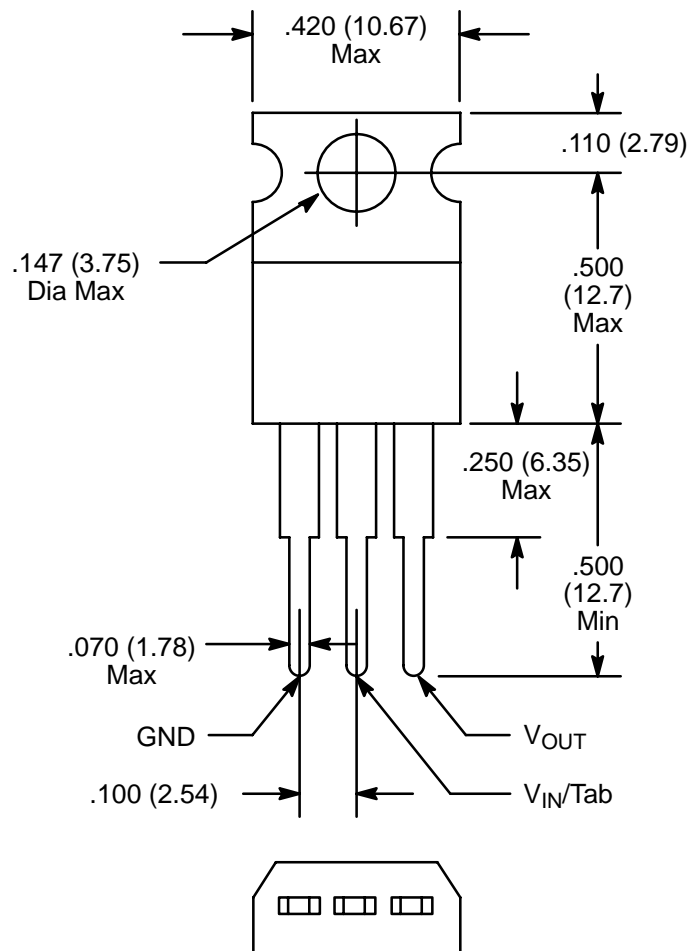

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Linear Voltage Regulators](#) category:*

*Click to view products by [NTE](#) manufacturer:*

Other Similar products are found below :

[LV56831P-E](#) [LV5684PVD-XH](#) [MAX202ECWE-LF](#) [MCDTSA6-2R](#) [L4953G](#) [L7815ACV-DG](#) [PQ3DZ53U](#) [LV56801P-E](#)  
[TCR3DF13,LM\(CT](#) [TCR3DF39,LM\(CT](#) [TLE42794G](#) [L78L05CZ/1SX](#) [L78LR05DL-MA-E](#) [L78MR05-E](#) [033150D](#) [033151B](#) [090756R](#)  
[636416C](#) [NCV78M15BDTG](#) [702482B](#) [714954EB](#) [TLE42794GM](#) [TLE42994GM](#) [ZMR500QFTA](#) [BA033LBSG2-TR](#)  
[NCV78M05ABDTRKG](#) [NCV78M08BDTRKG](#) [NCP7808TG](#) [NCV571SN12T1G](#) [LV5680P-E](#) [CAJ24C256YI-GT3](#) [L78M15CV-DG](#) [L9474N](#)  
[TLS202B1MBV33HTSA1](#) [L79M05T-E](#) [NCP571SN09T1G](#) [MAX15006AASA/V+](#) [MIC5283-5.0YML-T5](#) [L4969URTR-E](#) [L78LR05D-MA-E](#)  
[NCV7808BDTRKG](#) [L9466N](#) [NCP7805ETG](#) [SC7812CTG](#) [NCV7809BTG](#) [NCV571SN09T1G](#) [NCV317MBTG](#) [MC78M15CDTT5G](#)  
[MC78M12CDTT5G](#) [L9468N](#)