


# USB-4702 USB-4704

**10 kS/s, 12-Bit, 8-Ch Multifunction DAQ  
USB Module**

**48 kS/s, 14-Bit, 8-Ch Multifunction DAQ  
USB Module**

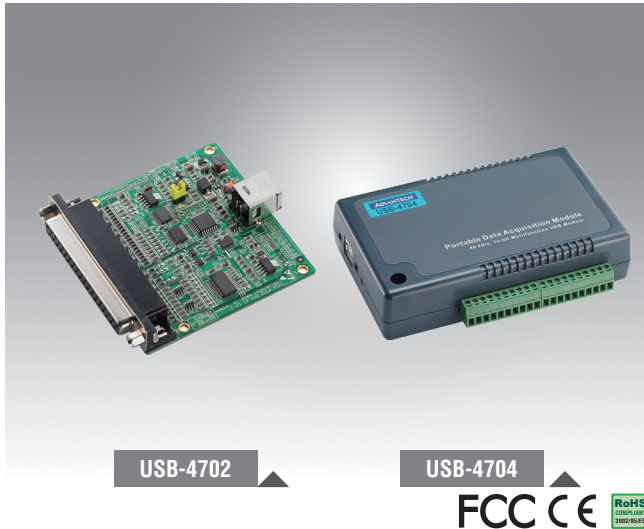

## Features

- Supports USB 2.0
- Portable
- Bus powered
- 8 x Analog input channels
- 12-bit (USB-4702), 14-bit (USB-4704) resolution AI
- Sampling rates of up to 10 kS/s (USB-4702), 48 kS/s (USB-4704)
- 8-ch Digital input/8-ch digital output, 2-ch analog output, and 1 x 32-bit counter

## Introduction

USB-4702 and USB-4704 are low-cost USB data acquisition modules that can be installed without opening the chassis; simply plug in the modules to access collected data. Reliable and rugged enough for industrial applications, yet sufficiently affordable for home systems, USB-4702 and USB-4704 DAQ modules provide an easy and efficient means of adding measurement and control capabilities to USB-capable computers. Additionally, because USB-4702 and USB-4704 draw power from the computer via the USB port, no external power connection is required, making these modules the most cost-effective solution for testing and measurement applications.

## Specifications

### Analog Input

- **Channels** 8 single ended/4 differential (software programmable)
- **Resolution** USB-4702: single ended: 11 bits  
Differential: 12 bits  
USB-4704: single ended: 13 bits  
Differential: 14 bits
- **Max. Sampling Rate** USB-4702: 10 kS/s max.  
USB-4704: 48 kS/s max.

Note: The sampling rate of each channel is influenced by the number of used channels. For example, if 4 channels are used, the sampling rate will be  $10k/4 = 2.5$  kS/s per channel.

- **FIFO Size** 512 samples
- **Overvoltage Protection** 30 V<sub>p-p</sub>
- **Input Impedance** 127 k $\Omega$
- **Sampling Modes** Software, onboard programmable pacer, and external
- **Input Range and Absolute Accuracy**

Single Ended		$\pm 10$	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Differential		N/A	$\pm 1$	$\pm 1.25$	$\pm 2$	$\pm 2.5$	$\pm 4$	$\pm 5$	$\pm 10$
Absolute Accuracy (% of FSR)*	USB-4702	0.2	0.15	0.15	0.15	0.15	0.15	0.15	0.15
	USB-4704	0.15	0.1	0.1	0.1	0.1	0.1	0.1	0.15

\*  $\pm 1$  LSB is added as the derivative for absolute accuracy

### Analog Output

- **Channels** 2
- **Resolution** 12 bits
- **Output Rate** Static update
- **Output Range** 0 ~ 5 V (software programmable)
- **Slew Rate** 0.7 V/ $\mu$ s
- **Driving Capability** 5 mA
- **Output Impedance** 51  $\Omega$
- **Operation Mode** Single output
- **Accuracy** Relative:  $\pm 12$  LSB  
Differential non-linearity:  $\pm 5$  LSB

### Digital Input

- **Channels** 8
- **Compatibility** 3.3 V/5 V/TTL
- **Input Voltage** Logic 0: 0.8 V max.  
Logic 1: 2.0 V min.

### Digital Output

- **Channels** 8
- **Compatibility** TTL
- **Output Voltage** Logic 0: 0.4 V max. @ 4 mA (sink)  
Logic 1: 3.5 V min. @ 4 mA (source)

### Counter

- **Channels** 1
- **Resolution** 32 bits
- **Compatibility** 3.3 V/TTL
- **Max. Input Frequency** 5 MHz

### General

- **Bus Type** USB 2.0
- **I/O Connector** USB-4702: 1 x DB37, female  
USB-4704: Onboard screw terminal
- **Dimensions (L x W x H)** USB-4702: 70 x 70 mm (2.76" x 2.76")  
USB-4704: 132 x 80 x 32 mm (5.2" x 3.15" x 1.26")
- **Power Consumption** Typical: 5 V @ 100 mA  
Max.: 5 V @ 500 mA
- **Operating Temperature** 0 ~ 55  $^{\circ}$ C (32 ~ 131  $^{\circ}$ F)
- **Storage Temperature** -20 ~ 70  $^{\circ}$ C (-4 ~ 158  $^{\circ}$ F)
- **Storage Humidity** 5 ~ 95% RH non-condensing

## Ordering Information

- **USB-4702-AE** 10 kS/s, 12-bit, 8-ch multifunction DAQ USB module
- **USB-4704-AE** 48 kS/s, 14-bit, 8-ch multifunction DAQ USB module

### Accessories

- **PCL-10137-1E** DB37 cable, 1 m
- **PCL-10137-2E** DB37 cable, 2 m
- **PCL-10137-3E** DB37 cable, 3 m
- **ADAM-3937-BE** DB37 DIN rail wiring board
- **1960004544** Wall mount bracket
- **1960005788** VESA mount bracket

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Data Logging & Acquisition](#) category:*

*Click to view products by [Advantech](#) manufacturer:*

Other Similar products are found below :

[ND-6063](#) [PCI-9221](#) [PCIE-7248](#) [ND-6017](#) [PCI-7432HIR](#) [DAQe-2214](#) [PCI-9113A](#) [ND-6053](#) [ACL-8112PG](#) [cPCI-7433](#) [cPCI-6208V-GL](#)  
[DAQe-2213](#) [ND-6056](#) [DAQ-2006](#) [DAQe-2502](#) [DAQ-2208](#) [PCIE-8560](#) [DAQe-2501](#) [PCI-7233](#) [PCM-7250+](#) [PCI-8124-C](#) [ND-6060](#) [DAQ-](#)  
[2206](#) [PCM-7248+](#) [PCIE-7200](#) [PCIE-PXI-EXP-KIT](#) [PCIE-7256](#) [PCIE-1884-AE](#) [USB-4761-BE](#) [PCI-1761-BE](#) [PCI-1711UL-CE](#) [PCI-1762-BE](#)  
[RHT30](#) [TH30](#) [USB-4702-AE](#) [USB-4704-AE](#) [USB-4711A-AE](#) [USB-4716-AE](#) [USB-4718-AE](#) [USB-4750-BE](#) [USB-4751-AE](#) [RHT35](#) [PCI-](#)  
[1714U-BE](#) [PCIE-1810-AE](#) [LPCIE-7250](#) [USB-4751L-AE](#) [PCI-1760U-BE](#) [PCI-6216V-GL](#) [LPCIE-7230](#) [PCI-1742U-AE](#)