


V _{RSM}	V _{RSM}	(dv/dt) _{cr}	I _{T(RMS)} (maximum values for continuous operation)			
			350 A	420 A	350 A	420 A
V	V	V/μs	I _{TAV} (sin. 180; T _{case} = . . .)			
			220 A (88 °C)	260 A (82 °C)	220 A (88 °C)	260 A (82 °C)
			SKKT	SKKT	SKKH	SKKH
900	800	1000	210/08 E	250/08 E	–	–
1300	1200	1000	210/12 E	250/12 E	210/12 E	250/12 E
1500	1400	1000	210/14 E	250/14 E	210/14 E	250/14 E
1700	1600	1000	210/16 E	250/16 E	210/16 E	250/16 E
1900	1800	1000	210/18 E	250/18 E	210/18 E	250/18 E
2100	2000	1000	210/20 E H4³⁾	–	210/20 E H4³⁾	–
2300	2200	1000	210/22 E H4³⁾	–	210/22 E H4³⁾	–

SEMIPACK® 3 Thyristor / Diode Modules

SKKT 210 **SKKH 210**
SKKT 250 **SKKH 250**



Symbol	Conditions	SKKT 210 SKKH 210	SKKT 250 SKKH 250	Units
I _{TAV}	sin. 180; (T _{case} = ...)	210 (90°C)	250 (85°C)	A
I _D	B2/B6 T _{amb} = 35 °C; P 16/200 F	420/550	450/585	A
I _{RMS}	W1/W3 T _{amb} = 35 °C; P 16/200 F	526/3 x 440	566/3 x 471	A
I _{TSM}	T _{vj} = 25 °C; 10 ms	8 500	9 000	A
	T _{vj} = 130 °C; 10 ms	7 500	8 000	A
i ² t	T _{vj} = 25 °C; 8,3 ... 10 ms	361 000	405 000	A ² s
	T _{vj} = 130 °C; 8,3 ... 10 ms	281 000	320 000	A ² s
t _{gd}	T _{vj} = 25 °C; I _G = 1 A di _G /dt = 1 A/μs	1		μs
t _{gr}	V _D = 0,67 · V _{DRM}	2		μs
(di/dt) _{cr}	T _{vj} = 130 °C	250		A/μs
t _q	T _{vj} = 130 °C	typ. 50 ... 150		μs
I _H	T _{vj} = 25 °C; typ. / max.	150 / 500		mA
I _L	T _{vj} = 25 °C; R _G = 33 Ω; typ. / max.	0,3 / 2		A
V _T	T _{vj} = 25 °C; I _T = 750 A	max. 1,5	max. 1,4	V
V _{T(TO)}	T _{vj} = 130 °C	0,95	0,925	V
r _T	T _{vj} = 130 °C	0,6	0,45	mΩ
I _{DD} ; I _{RD}	T _{vj} = 130 °C; V _{RD} = V _{RSM} V _{DD} = V _{DRM}	50	50	mA
V _{GT}	T _{vj} = 25 °C; d.c.	3		V
I _{GT}	T _{vj} = 25 °C; d.c.	200		mA
V _{GD}	T _{vj} = 130 °C; d.c.	0,25		V
I _{GD}	T _{vj} = 130 °C; d.c.	10		mA
R _{thjc}	cont. } sin. 180 } per thyristor / rec. 120 } per module	0,14 / 0,07		°C/W
		0,15 / 0,075		°C/W
		0,165 / 0,083		°C/W
R _{thch}		0,04 / 0,02		°C/W
T _{vj} , T _{stg}		– 40 ... + 130		°C
V _{isol}	a. c. 50 Hz; r.m.s.; 1 s/1 min	3600 / 3000		V~
M ₁	to heatsink } SI (US) units	5 (44 lb. in.) ± 15 % ¹⁾		Nm
M ₂	to terminals }	9 (80 lb. in.) ± 15 % ²⁾		Nm
a		5 · 9,81		m/s ²
w	approx.	750		g
Case		SKKT: A 73 a SKKH: A 76 a		



Features

- Heat transfer through aluminium nitride ceramic isolated metal baseplate
- Precious metal pressure contacts for high reliability
- Thyristor with amplifying gate
- UL recognized, file no. E 63 532

Typical Applications

- DC motor control (e.g. for machine tools)
- Temperature control (e.g. for ovens, chemical processes)
- Professional light dimming (studios, theaters)
- AC motor starters

¹⁾ See the assembly instructions
²⁾ The screws must be lubricated
³⁾ V_{isol} 1 s/1 min. = 4800/4000 V~

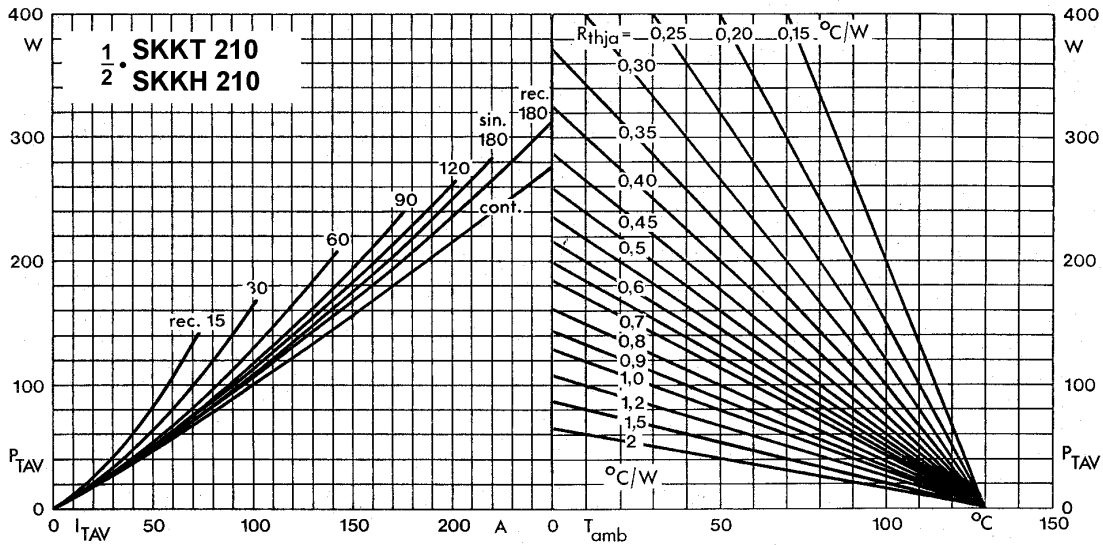


Fig. 1 a Power dissipation per thyristor vs. on-state current and ambient temperature

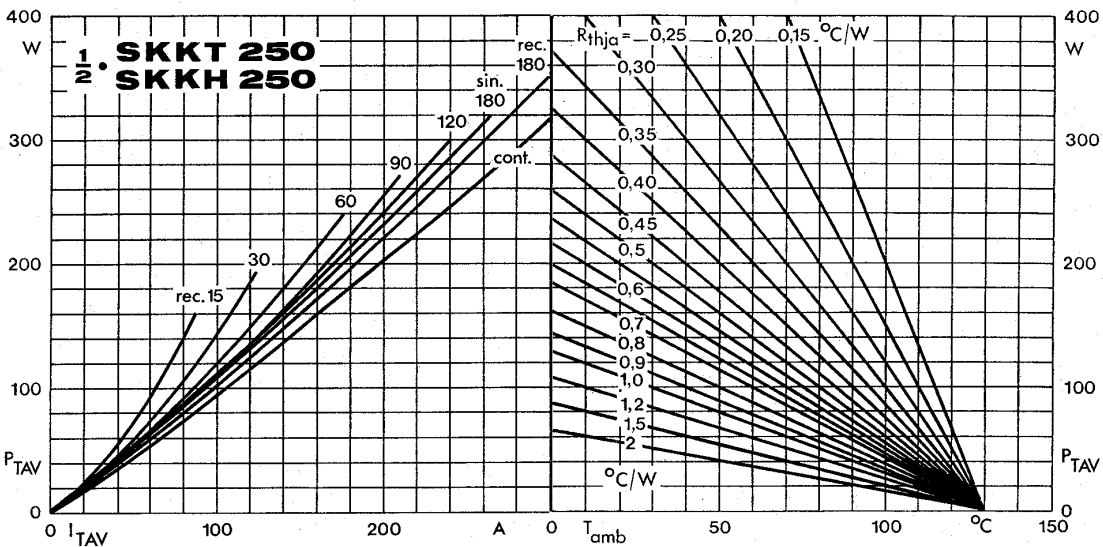


Fig. 1 b Power dissipation per thyristor vs. on-state current and ambient temperature

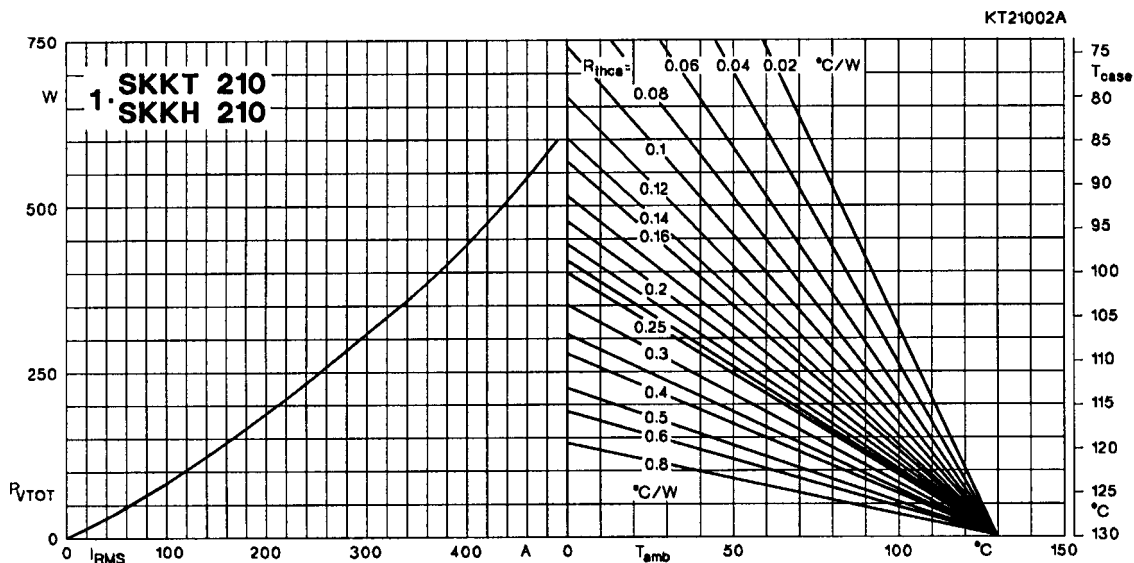


Fig. 2 a Power dissipation per module vs. rms current and case temperature

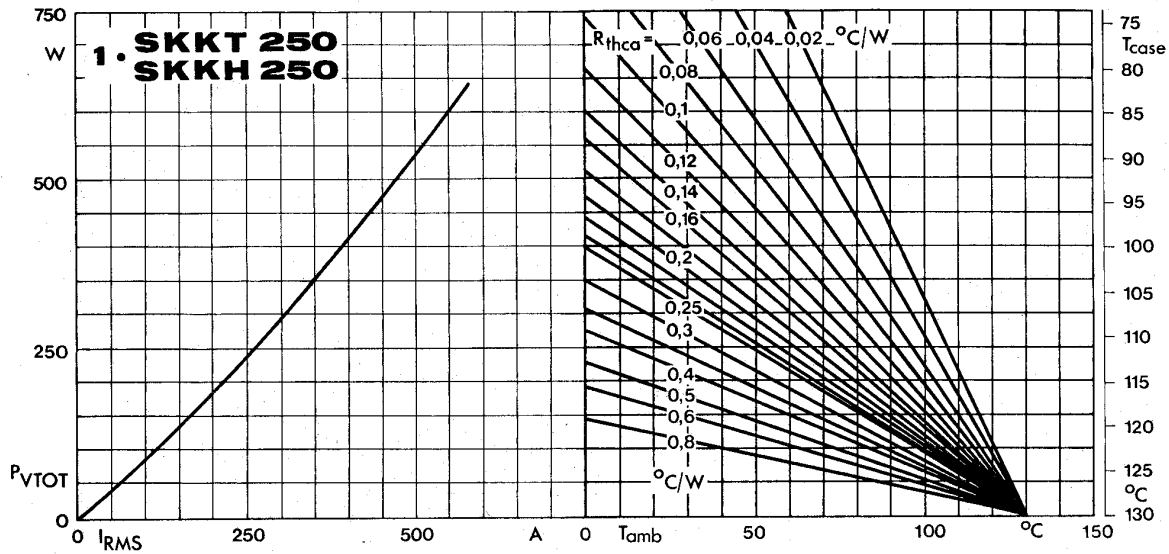


Fig. 2 b Power dissipation per module vs. rms current and case temperature

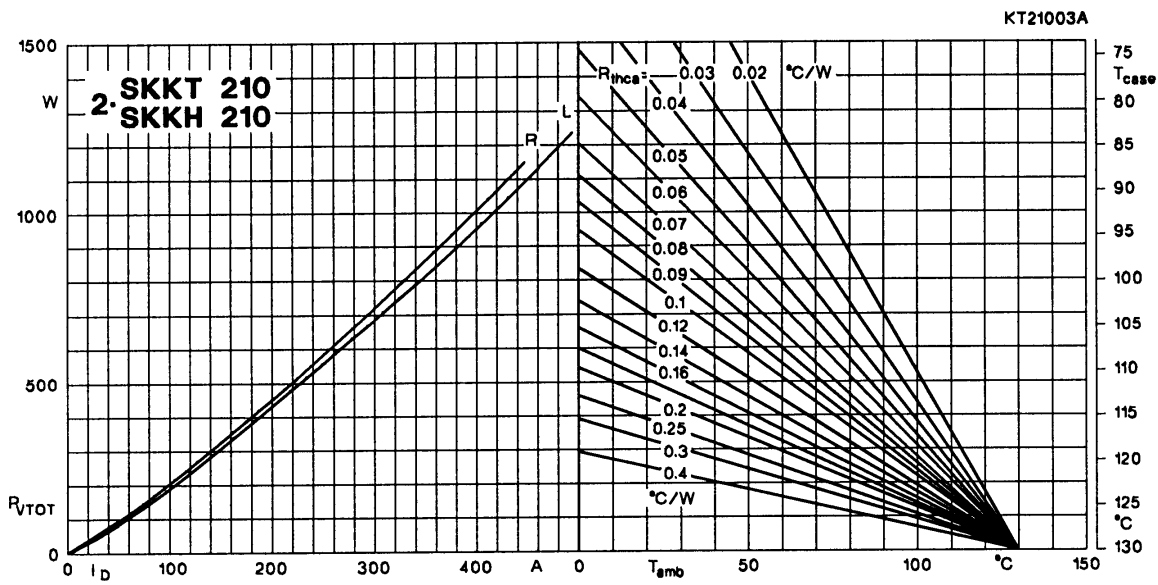


Fig. 3 a Power dissipation of two modules vs. direct current and case temperature

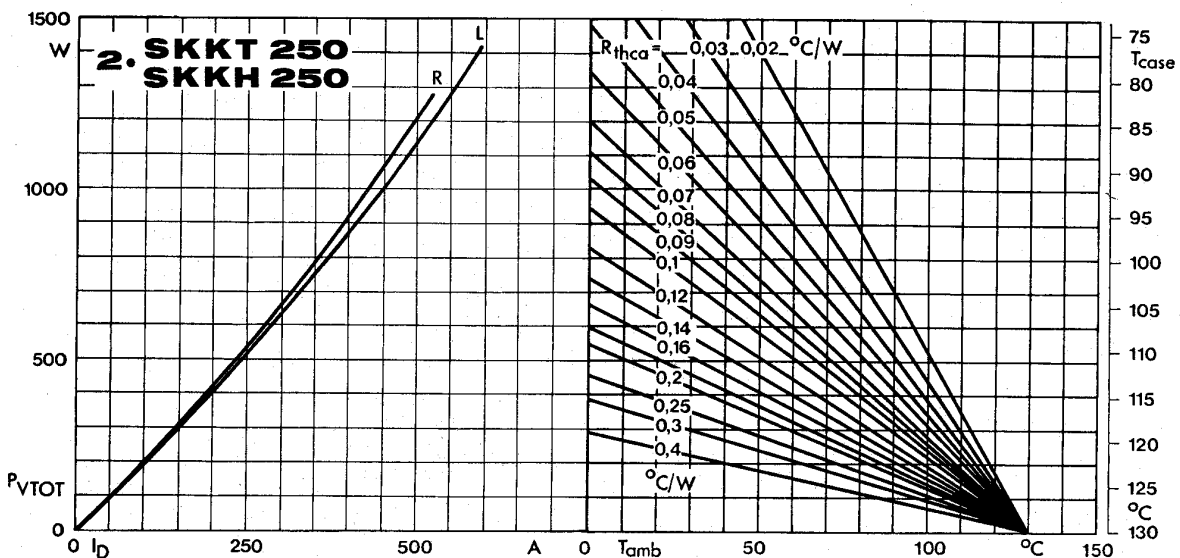


Fig. 3 b Power dissipation of two modules vs. direct current and case temperature

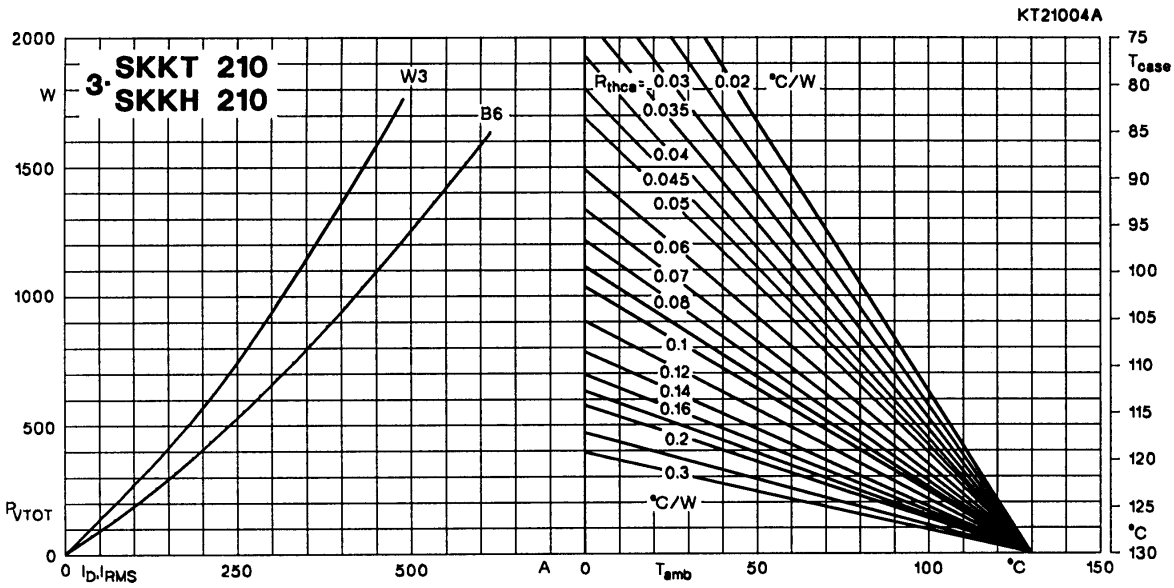


Fig. 4 a Power dissipation of three modules vs. direct and rms current and case temperature

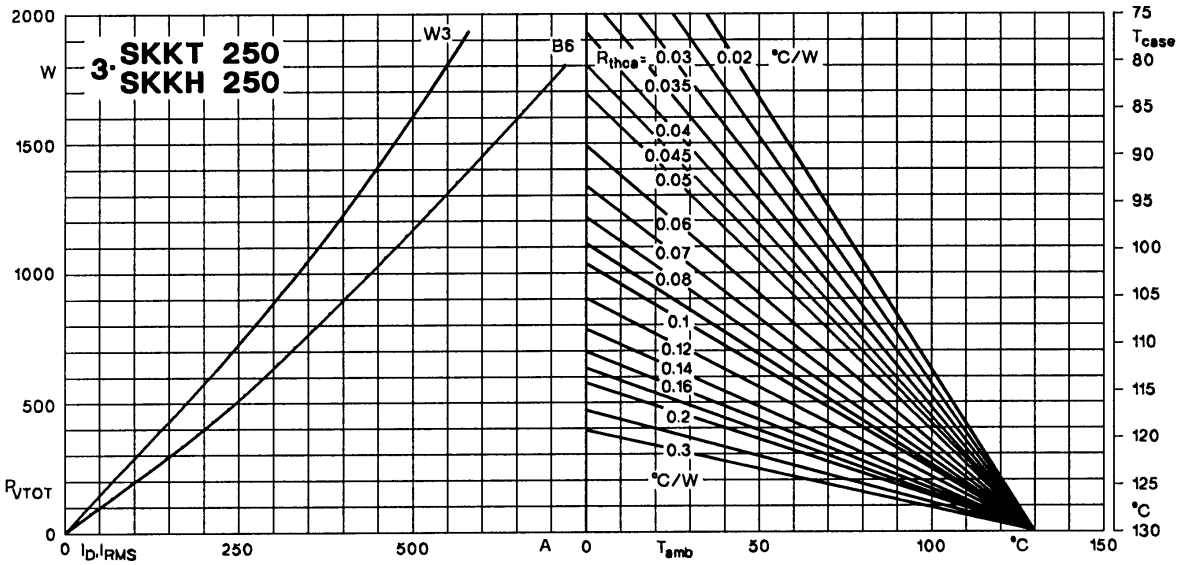


Fig. 4 b Power dissipation of three modules vs. direct and rms current and case temperature

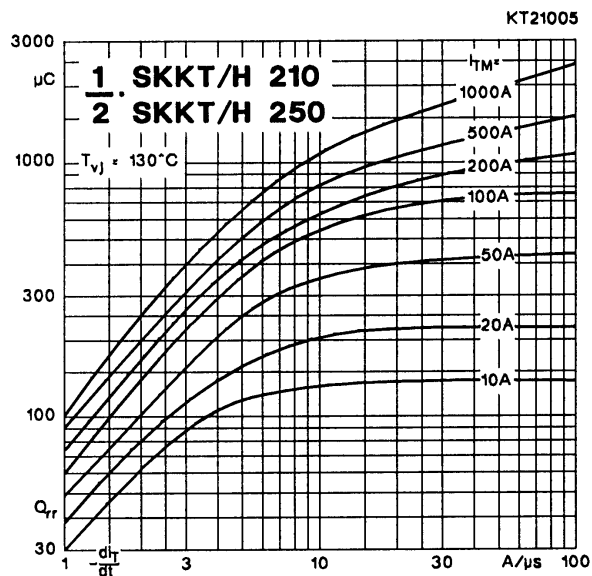


Fig. 5 Recovered charge vs. current decrease

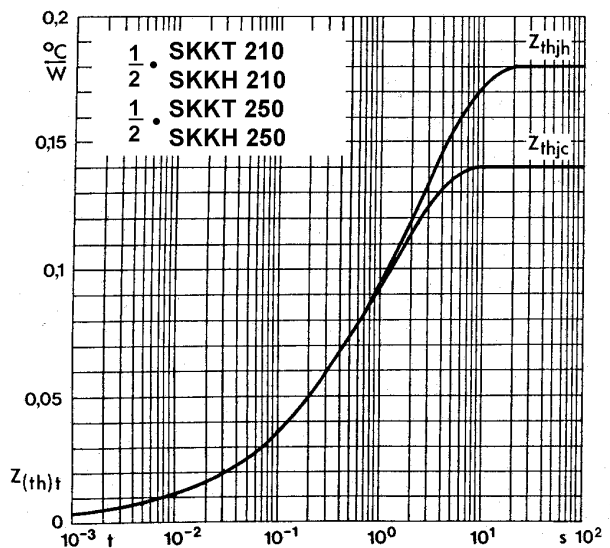


Fig. 6 Transient thermal impedance vs. time

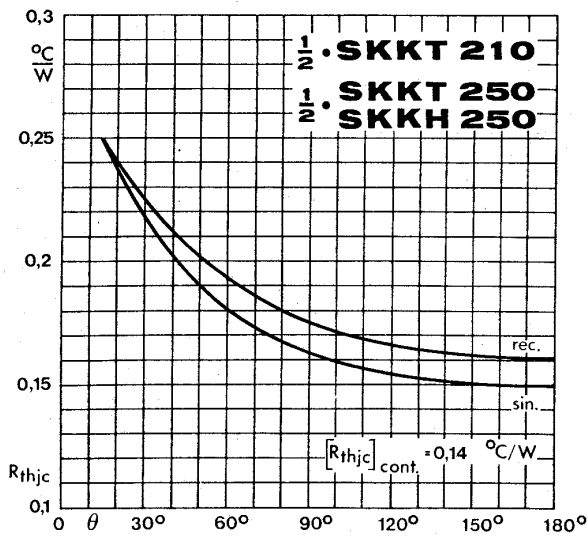


Fig. 7 Thermal resistance vs. conduction angle

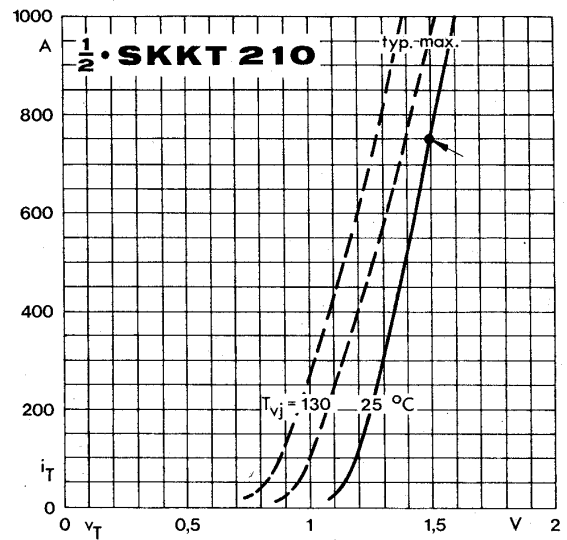


Fig. 8 a On-state characteristics

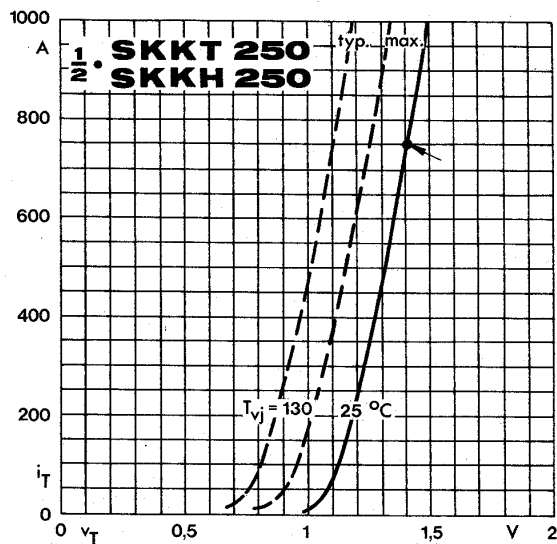


Fig. 8 b On-state characteristics

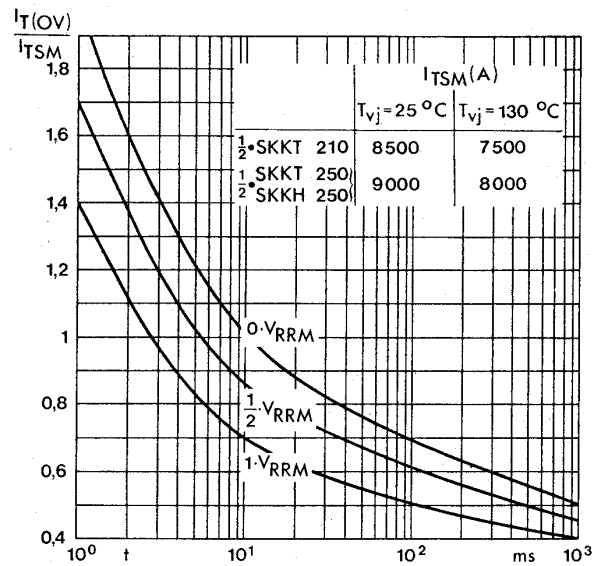


Fig. 9 Surge overload current vs. time



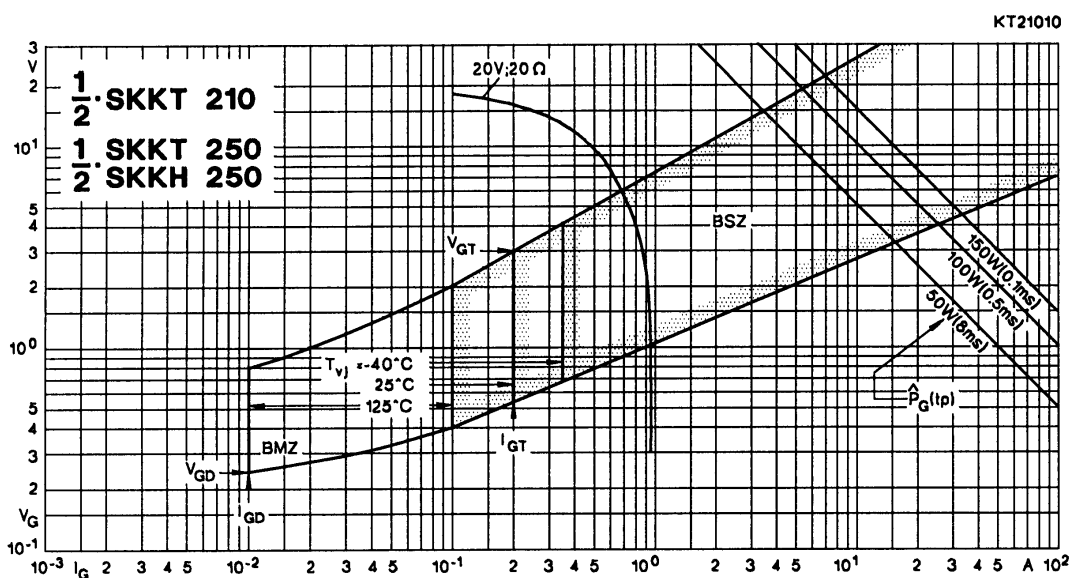


Fig. 10 Gate trigger characteristics

SKKT 210

SKKT 250

Case A 73 a
SEMIPACK® 3

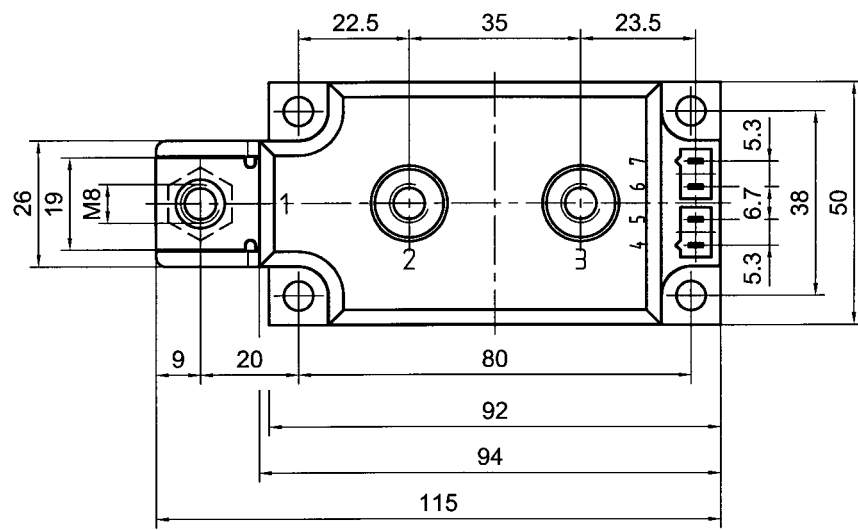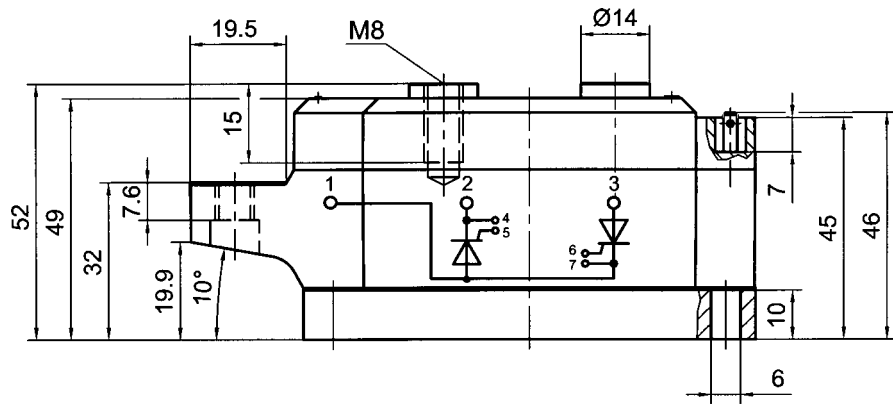


Dimensions in mm

SKKH 210

SKKH 250

Case A 76 a

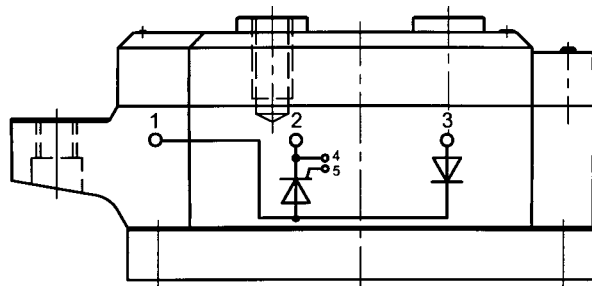

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [SCR Modules](#) category:

Click to view products by [Semikron](#) manufacturer:

Other Similar products are found below :

[DT430N22KOF](#) [T1401N42TOH](#) [T1851N60TOH](#) [T390N14TOF](#) [T420N12TOF](#) [T470N16TOF](#) [T640N16TOF](#) [T901N36TOF](#) [TD140N18KOF](#)
[TD142N16KOF](#) [TD162N16KOF-A](#) [TD250N12KOF](#) [TD330N16AOF](#) [TT215N22KOF](#) [TZ310N20KOF](#) [TZ425N12KOF](#) [TZ500N12KOF](#)
[T300N14TOF](#) [T3710N06TOF](#) [VT](#) [T390N16TOF](#) [T460N24TOF](#) [T501N70TOH](#) [T560N16TOF](#) [T640N14TOF](#) [TD250N14KOF](#)
[TT600N16KOF](#) [TZ500N16KOF](#) [TZ240N36KOF](#) [TT210N12KOF](#) [NTE5710](#) [TD180N16KOF](#) [TT240N28KOF](#) [TZ425N14KOF](#)
[T1081N60TOH](#) [TT61N08KOF](#) [TD251N18KOF](#) [TT162N08KOF](#) [TZ430N22KOF](#) [TT180N12KOF](#) [T2001N34TOF](#) [TD140N22KOF](#)
[MDMA200P1600SA](#) [TT180N16KOF](#) [VS-ST333C08LFM0](#) [VS-ST180C14C0L](#) [T1080N02TOF](#) [TD320N16SOF](#) [T360N22TOF](#)
[TZ810N22KOF](#) [T2563NH80TOH](#)