


# ADAM-5024 ADAM-5050 ADAM-5051/D/S

4-ch Analog Output Module

16-ch Universal Digital I/O Module

16-ch Digital Input Module

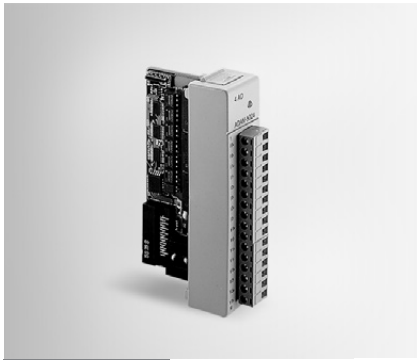

ADAM-5024



ADAM-5050



ADAM-5051  
ADAM-5051D  
ADAM-5051S



## Specifications

### General

- **Certification** CE, FM
- **Connectors** 1 x Plug-in screw terminal (# 14 ~ 22 AWG)
- **Enclosure** ABS+PC
- **Power Consumption** 2.9 W (max.)

### Analog Output

- **Accuracy** ±0.1% of FSR for current output  
±0.2% of FSR for voltage output
- **Channels** 4
- **Current Load Resistor** 0 ~ 500 Ω (source)
- **Output Type** mA, V
- **Output Range** 0 ~ 20 mA, 4 ~ 20 mA, 0 ~ 10 V
- **Programmable Output Slope** 0.125 ~ 128.0 mA/sec.  
0.0625 ~ 64.0 V/sec.
- **Resolution** 12-bit
- **Resolution** ±0.015% of FSR
- **Span Temperature Coefficient** ±25 PPM/°C
- **Zero Drift** Voltage: ±30 μV/°C  
Current: ±0.2 μA/°C

### Protection

- **Isolation Voltage** 3,000 V<sub>DC</sub>

## Ordering Information

- **ADAM-5024** 4-ch Analog Output Module

## Specifications

### General

- **Certification** CE, FM
- **Connectors** 1 x Plug-in screw terminal (# 14 ~ 22 AWG)
- **Enclosure** ABS+PC
- **Power Consumption** 1.2 W (max.)

### Digital I/O

- **Channels** 16
- **Channel I/O Type** Bit-wise selectable by DIP switch
- **Digital Input** Dry Contact:  
Logic level 0: close to GND  
Logic level 1: open  
Wet Contact:  
Logic level 0: 2 V max.  
Logic level 1: 4 ~ 30 V
- **Digital Output** Open collector to 30 V,  
100 mA and 450 mW max. load
- **Power Dissipation** 300 mW for each channel

## Ordering Information

- **ADAM-5050** 16-ch Universal Digital Input/Output Module

## Specifications

### General

- **Certification** CE
- **Connectors** ADAM-5051/5051D: 1 x Plug-in screw terminal (# 14 ~ 22 AWG)  
ADAM-5051S: 1 x Plug-in screw terminal (# 14 ~ 28 AWG)
- **Enclosure** ABS+PC

### LED Indicators

- ADAM-5051D On: Input logic level 1  
Input floating  
Off: Input logic level 0
- ADAM-5051S On: Active  
Off: Inactive

### Power Consumption

- ADAM-5051: 0.53 W (max.)
- ADAM-5051D: 0.84 W (max.)
- ADAM-5051S: 0.8 W (max.)

### Digital Input

- **Circuit Type** Pull-up current: 0.5 mA (Source Type) -only for ADAM-5051/5051D
- **Channels** 16
- **Input Voltage** ADAM-5051/5051D: 30 V max  
ADAM-5051S: 50 V max
- **Logic Level** ADAM-5051/5051D Logic level 0: 1 V max.  
Logic level 1: 3.5 ~ 30 V
- ADAM-5051S Logic level 0: 3 V max.  
Logic level 1: 10 ~ 50 V

### Protection (Only for ADAM-5051S)

- **Optical Isolation** 2,500 V<sub>DC</sub>
- **Overvoltage Protection** 70 V<sub>DC</sub>

## Ordering Information

- **ADAM-5051** 16-ch Digital Input Module
- **ADAM-5051D** 16-ch Digital Input Module w/ LED
- **ADAM-5051S** 16-ch Isolated Digital Input Module w/ LED

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [I/O Modules](#) category:*

*Click to view products by [Advantech](#) manufacturer:*

Other Similar products are found below :

[70L-IDC5S](#) [70L-OAC-L](#) [70Z3289-4](#) [G21960000700](#) [G21960002700](#) [G34960002700](#) [G88104401](#) [GUR02](#) [OACU](#) [C4SWOUT](#) [PB16H](#) [SM-IDC15](#) [G34960001700](#) [G77-S](#) [G78-16-E](#) [GP34829091724](#) [GP34960005700](#) [JQP4](#) [ODC-24A](#) [IDC5P](#) [FC6A-N16B1](#) [6421](#) [FC6A-N32B3](#) [70MRCQ32-HL](#) [C200H-LK201-V1](#) [G3TA-OA202SZ-US](#) [DC12](#) [GT1-OD16](#) [GT1-AD04CST](#) [GT1-DA04](#) [B7AM-6BS](#) [GRT1-ML2](#) [GRT1-TS2P](#) [CRT1-ID16TAH-1](#) [70GRCQ24-HS](#) [CRT1-ID08](#) [G7TC-ID16 DC24V](#) [CRT1-ID08-1](#) [84110210](#) [6422](#) [AIIS-DIO32-00A1E](#) [84110410](#) [GT1-OD16MX](#) [GRT1-PC8](#) [G7VC-OC16-B7](#) [G7TC-OC08-1 DC24V](#) [G7TC-IA16 AC200/220V](#) [G7TC-OC08 DC24V](#) [70MRCK24-DIN](#) [2736505](#) [ODC5AQ](#)