

NERBO®

NBC 15-12L



NBC series is specially designed for frequent deep cycle discharge. By using the specially designed active material and strong grids, the NBC series battery offers reliable performance in high load conditions. Suitable for any kind of power-driven vehicles, especially for scooters, wheelchairs etc.


Specification

Number of cells	6
Voltage	12 V
Capacity	15 Ah at 20 h discharge down to 1.8V by cell at 25°C
Weight	approx. 4,5 kg
Max discharge current	140 A (5 s)
Internal resistance	approx. 12 mΩ
Working temperature	Discharge: -20°C ÷ 60°C Charge: 0°C ÷ 50°C Storage: -20°C ÷ 60°C
Optimum working temperature	25°C±5°C
Max. Charge current	4,2 A
Charge voltage	14,6÷14,8 VDC for cyclic work at 25°C
Self-discharge	Batteries may be stored for a period longer than 6 months at 25°C. Before use please charge batteries.
Terminal	Connector 6,3 mm
Case material	A.B.S. (UL94-HB), fire resistance UL94-V-0 optional




Dimensions


length / width / height / total height [mm]: 151 / 98 / 99 / 105

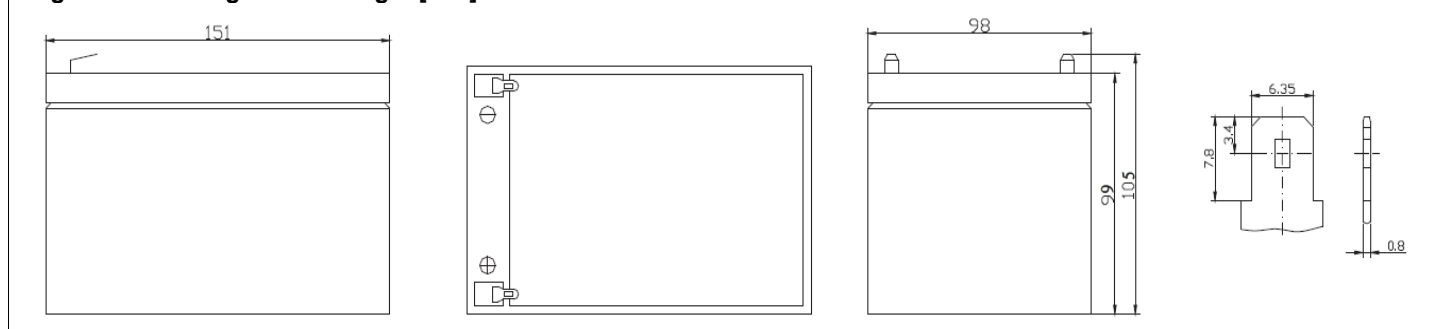


Cyclic usefull life

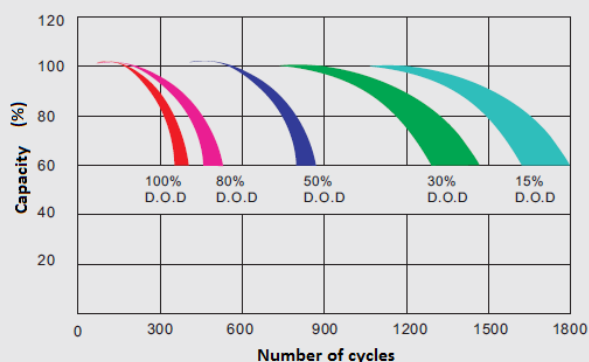


Self-discharge in time

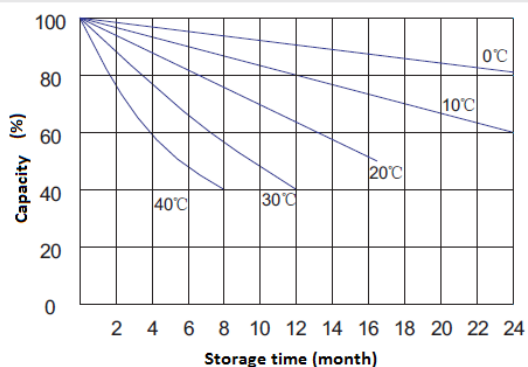

Charge characteristics

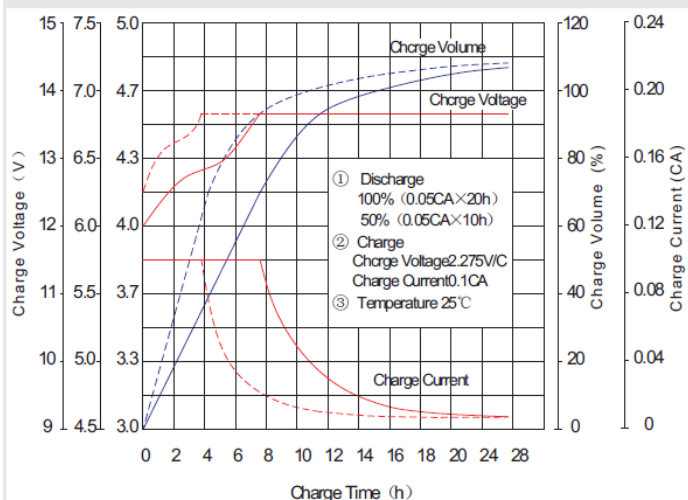

Discharge characteristics

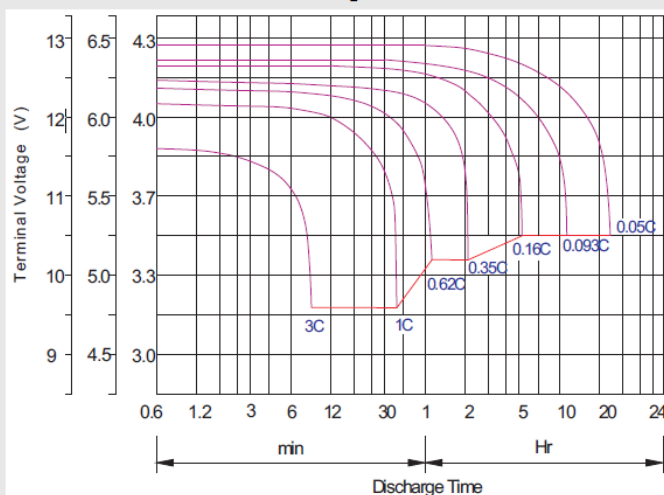

Constant current characteristics: A at 25°C

Voltage / Time	5 min	10 min	15 min	30 min	1 h	2 h	3 h	4 h	5 h	8 h	10 h	20 h
9,6 V	58,53	38,37	25,58	15,21	9,65	5,85	3,89	3,17	2,60	1,66	1,45	0,79
10,0 V	56,42	37,42	27,67	15,02	9,52	5,74	3,81	3,12	2,58	1,65	1,43	0,76
10,2 V	53,10	35,56	26,90	14,79	9,43	5,68	3,78	3,09	2,56	1,64	1,42	0,75
10,5 V	47,73	33,26	25,37	14,38	9,31	5,60	3,75	3,04	2,53	1,64	1,40	0,72
10,8 V	42,77	31,01	23,94	13,66	9,11	5,56	3,70	2,94	2,52	1,63	1,37	0,69
11,1 V	37,42	28,43	22,08	13,38	8,75	5,33	3,63	2,90	2,50	1,62	1,36	0,67

Constant power characteristics: W at 25°C

Voltage / Time	5 min	10 min	15 min	30 min	1 h	2 h	3 h	4 h	5 h	8 h	10 h	20 h
9,6 V	634,80	420,80	315,40	174,20	111,80	70,02	46,47	37,89	31,16	19,83	17,33	9,45
10,0 V	618,30	412,10	310,90	172,30	110,20	68,52	45,71	37,35	30,88	19,77	17,17	9,12
10,2 V	588,10	395,70	306,80	170,90	109,40	67,96	45,31	37,01	30,70	19,70	17,00	8,95
10,5 V	536,80	379,40	290,80	167,40	107,90	67,18	44,98	36,51	30,45	19,63	16,83	8,61
10,8 V	484,30	354,90	275,00	160,90	107,90	66,63	44,46	35,27	30,31	19,55	16,48	8,26
11,1 V	427,00	330,50	258,80	158,90	104,20	64,03	43,59	34,77	30,20	19,47	16,30	8,10

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Sealed Lead Acid Battery](#) category:

Click to view products by [Nerbo](#) manufacturer:

Other Similar products are found below :

[0809-0012](#) [0819-0012](#) [0850-0004](#) [0859-0012](#) [0800-0004](#) [LC-R0612P](#) [LC-R061R3P](#) [PS-1250F1](#) [APCRBC123](#) [APCRBC124](#) [LCRA1212P](#)
[NP12-12](#) [NP12-6](#) [NP3.2-12](#) [LC-P0612P](#) [LC-R063R4P](#) [LC-R067R2P1](#) [LC-R122R2P](#) [LC-R0612P1](#) [LC-R127R2P1](#) [LC-X1220AP](#) [UP-](#)
[VW1245P1](#) [2320296](#) [RBC32](#) [RBC11A](#) [RBC36-SLT](#)