

GENERAL PURPOSE, HI-K DIELECTRIC CONSTANT (Class II/III) TYPE

FEATURES

- WIDE SELECTION OF TEMPERATURE CHARACTERISTICS
- HIGH INSULATION RESISTANCE
- EXCELLENT HIGH FREQUENCY CHARACTERISTICS
- ECONOMICALLY PRICED
- AVAILABLE WITH FORMED LEADS AND ON TAPE FOR AUTOMATIC INSERTION





LEADED

SPECIFICATIONS


Temperature Characteristics	Y5F	Y5P	Z5U	Z5V	
Operating Temperature Range	-30° ~ +85°C	-30° ~ +85°C	+10° ~ +85°C	+10° ~ +85°C	
Capacitance Range	100pF~.01μF	100pF~.022μF	.001μF~.1μF	.001μF~.1μF	
Standard Tolerance	K= ±10%	K= ±10%	M= ±20%	Z= -20%~+80%	
Capacitance Change Over Temperature Range	±7.5%	±10%	+22% -56%	+22% -82%	
Dissipation Factor	2.5%*	2.5%*	5%	5%	
Insulation Resistance	Minimum 10,000 Megohms				
Working Voltage Range	50 ~ 1kVdc				
Dielectric Withstanding Voltage	2.5 Times Rated Voltage For Not Less Than 1 Second, 50mA Max.				
Load Life Test 85°C 1000 Hrs	Cap. Change	±10%	±10%	±20%	±30%
	D.F. (MAX.)	4%	4%	7.5%	7.5%
	I.R. (Min)	1,000 Megohms			
Test Conditions	1Khz; 1.0V ±0.2Vrms		1Khz; 0.5V ±0.1Vrms		

* Special low dissipation factor (1.0% max.) Y5F and Y5P dielectrics are also available. Contact NIC for availability.

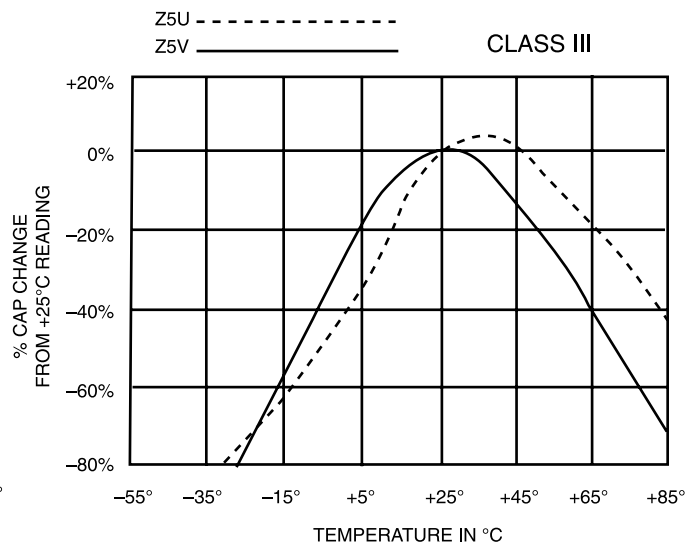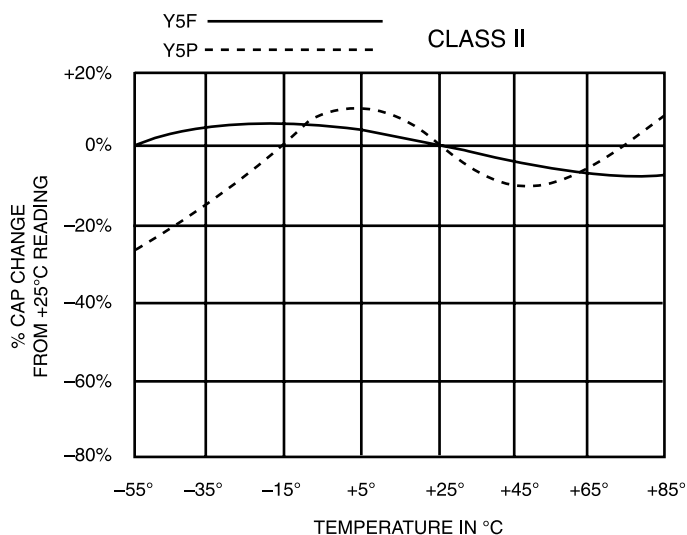

LEADED

PART NUMBERING SYSTEM

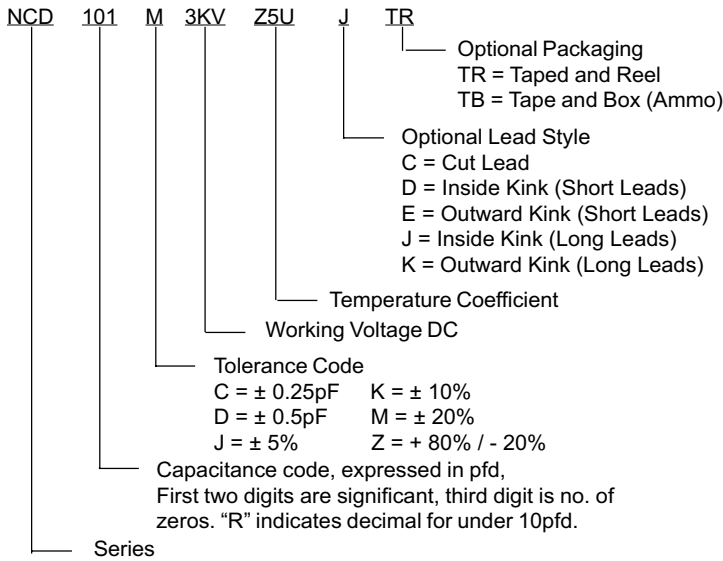

Lead Spacing (mm) - S				
Body Diameter	Standard Bulk	Standard T & R	Optional Bulk	Optional T & R
5 ~ 11	6.35 ±0.8	5.0 ±0.8	5.0 ±0.8	2.5 ±0.8
≥ 12	6.35 ±0.8	5.0 ±0.8	7.5 ±0.8	7.5 ±0.8
			10.0 ±0.8	10.0 ±0.8

LEAD DIAMETER
0.6MM IS STANDARD

BODY THICKNESS
2 ~ 4MM DEPENDENT ON CV


STANDARD PRODUCTS AND MAXIMUM DIAMETER (mm) BY T.C. AND VOLTAGE

Cap. (pF/μF)	Y5F/Y5P*			Z5U			Z5V		
	50V 100V	500V	1KV	50V 100V	500V	1KV	50V 100V	500V	1KV
100 ~ 470pF	6	6	6						
560	6	6	6						
680	6	6	7						
750	6	6	7						
820	6	6	7						
.001μF	6	7	7	6	6	6	6	6	6
.0015	6	8	8	6	6	7	6	6	6
.0022	6	9	10	6	7	7	6	6	6
.0027	7	10	12	6	7	8	6	6	7
.0033	7	10	14	6	7	9	6	7	8
.0047	8	12	14	6	8	10	6	8	8
.0056	9	14	16	6	9	10	6	8	9
.0068	9	14	16	7	9	12	6	8	10
.0082	10	16	18	7	10	12	6	9	10
.01	12	16	20	7	10	12	6	9	10
.015	14	21		9	14	16	7	10	12
.022				10	16	18	8	14	16
.033				8	18	22	7	16	18
.047				8	21	24	7	16	21
.068				8/9	24		8	16	
.1				8/9	26		8/9	17	


*.0047μF AND ABOVE NOT AVAILABLE IN Y5F, PLEASE USE Y5P.

NIC RESERVES THE RIGHT TO REQUEST MINIMUM QUANTITIES ON CERTAIN VALUES.


Standard
500Vdc & Up




Low Voltage
100Vdc & Below



J Style




K Style




(BULK AND TAPED STYLES)

D Style



E Style



(BULK ONLY)



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ceramic Disc Capacitors](#) category:

Click to view products by [NIC](#) manufacturer:

Other Similar products are found below :

[009377XM](#) [5AS560JCFCA](#) [5AU100JCECA](#) [5AU470JCJCA](#) [DEF2CLH020CA3B](#) [HSE102MAQBF0KR](#) [432202101621](#) [432202282431](#)
[DEF2CLH030CJ3B](#) [W1X223MCVCF0KR](#) [564RC0GBA302EJ470K](#) [5AS270JCDCA](#) [5AS330JCDCA](#) [5AU330JCGCA](#)
[DE1E3KX222MJ4BN01F](#) [440LT68AP-R](#) [JN222MQ47FAAAAKPLP](#) [H8000090-245](#) [H8000090-225RY](#) [H8000090-309RY](#) [H8000090-](#)
[291RY](#) [F471K39S3NR63K7R](#) [DEF2CLH040CN3A](#) [DEF2CLH080DA3B](#) [564R3DF0T22](#) [CC2150KY5P1KVB5LS-LF](#)
[CC2180KY5P1KVB5LS-LF](#) [CC2470KY5P1KVB5LS-LF](#) [CC2820KY5P1KVB5LS-LF](#) [0838-040-X7R0-220K](#) [JN102MQ35FAAAAKPLP](#)
[0841-040-X5U0-103M](#) [CCH-6K8-5/1000V](#) [140-50N2-101J-TB-RC](#) [ECK-DGL102ME](#) [562R5GAD47RR](#) [S103K75Y5PN8BT0R](#)
[615R100GAD10](#) [615R150GAD10](#) [NCD100K1KVSLF](#) [NCD682M1KVZ5UF](#) [CCK-100N](#) [CCK-100P](#) [CCK-22N](#) [CCK-2N2](#) [CCK-47N](#) [CCK-](#)
[47P](#) [CCK-4N7](#) [CCK-4P7](#) [CK45-B3FD681KYNNA](#)