
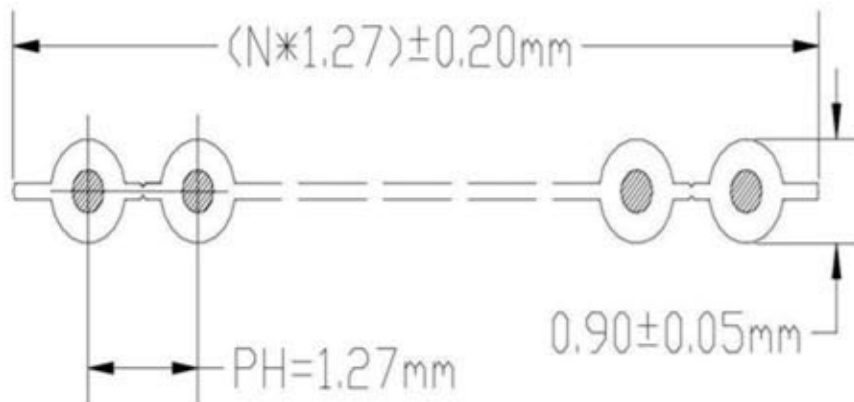


CONSTRUCTION ITEM		NPIN
CONDUCTOR	SIZE	28AWG
	MATERIAL	TC
	CONSTRUCTION	7/ Φ 0.125 \pm 0.008mm
JCAKET	AVG. THICK	0.26mm
	MIN. THICK	0.18mm
	MATERIAL	45P 105°C UL-PVC All raw materials meet RoHS standards
	DIAMETER	0.90 \pm 0.05 \times (1.27*N) \pm 0.20mm PH=1.27mm
	COLOR	GRAY#-PINK (HALF ATOMIZER)
MARKING	MARKING NO.	 AWM 2651 VW-1 105°C 300V 28AWG
	COLOR	BLACK


ELECTRICAL CHARACTERISTICS

1. Conductor Resistance: AT 20°C Max: 28AWG 237.25 Ω /KM
2. Insulation Resistance: AT 20°C Min: 10M Ω /KM
3. Dielectric Strength: AC2000V 60HZ/min



**RoHS
Compliant**



APPD.		TOLERANCE	PART NAME
DWG.	SCALE	0.00 * ANG. *	FLAT CABLE 1.27mm UL2651 XXP 28AWG GREY 1 ROLL=100F ROHS
DATE	UNIT	SIZE: A4	PART NO.
2012/05/11	M M	REV. B	FLC-XX/30-E
	PAGE 1 OF 1		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ribbon Cables / IDC Cables](#) category:

Click to view products by [BQ Cable](#) manufacturer:

Other Similar products are found below :

[FSK-12A Ribbon Cable, 6 Pin, 500mm](#) [AWG28-10G EHV3C EHV4C EHV5C](#) [cab-LVDV-PWR-10-15 FSP-25A Ribbon Cable, 4 Pin, 350mm](#)
[Ribbon Cable, 6 Pin, 300mm](#) [cab-LVDV-DAT-34-15](#) [49635-C62-S2](#) [1-3636-600-5204](#) [92315-1408](#) [100063-0094](#) [100063-0106](#) [100063-0102](#)
[100063-0104](#) [MMSD-02-20C-F-15.00-S-K](#) [100063-0099](#) [100063-0105](#) [100063-0095](#) [100063-0103](#) [100063-0093](#) [100063-0091](#) [2200000068](#)
[100063-0092](#) [100063-0101](#) [100063-0100](#) [100063-0097](#) [TFSDT-08-28-H-15.00-S](#) [S1SD-02-30-GF-09.00-L](#) [MMSD-02-22C-F-15.00-S-K](#)
[S1SS-02-28C-GF-02.00-L](#) [S1SDT-02-28-GF-03.00-L](#) [2-1589735-3](#) [JSM015PP2DCC23N](#) [92301-0283](#) [TCSD-22-D-26.00-01](#) [S1SST-07-30-](#)
[GF-06.00-L](#) [T2SD-20-24-L-07.87-TR-NUS](#) [DS1057-01-44A282R-30.5](#) [FFSD-06-S-17.00-01-N](#) [IDSS-03-D-20.00-T](#) [TCMD-17-S-36.00-01-](#)
[SR](#) [92301-0718](#) [839023](#) [490107670612S](#) [MMSDT-06-20-S-05.5-D-K-LDX](#) [IDD-04-G](#)