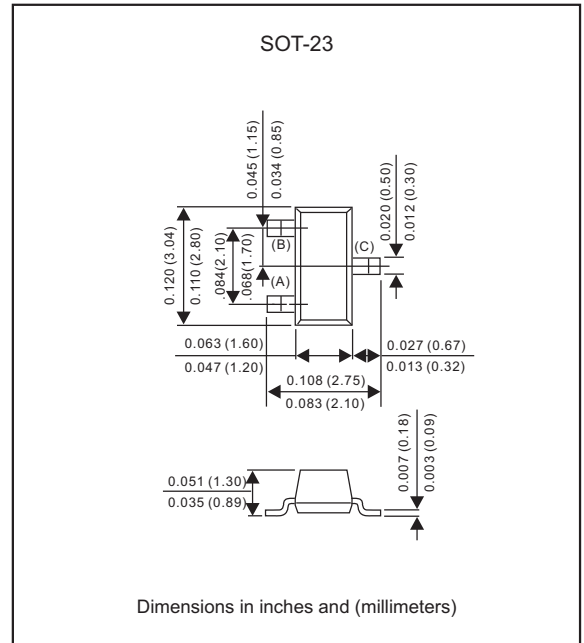


**MMBT2222 / MMBT2222A****General Purpose Transistor  
NPN Silicon****Features**

- High collector-emitter breakdown voltage.  
( $V_{CE0} = 40V @ I_C = 10mA$ )
- Small load switch transistor with high gain and low saturation voltage, is designed for general purpose amplifier and switching applications at collector current.
- Capable of 225mW power dissipation.
- Lead-free parts for green partner, exceeds environmental standards of MIL-STD-19500 /228
- Suffix "-H" indicates Halogen-free part, ex.MMBT2222-H.

**Mechanical data**

- Epoxy:UL94-V0 rated flame retardant
- Case : Molded plastic, SOT-23
- Terminals : Solder plated, solderable per MIL-STD-750, Method 2026
- Mounting Position : Any
- Weight : Approximated 0.008 gram

**Package outline****Maximum ratings** (AT  $T_A = 25^\circ C$  unless otherwise noted)

PARAMETER	CONDITIONS	Symbol	MMBT2222	MMBT2222A	UNIT
Collector-base voltage		$V_{CBO}$	60	75	V
Collector-emitter voltage		$V_{CEO}$	30	40	V
Emitter-base voltage		$V_{EBO}$	5.0	6.0	V
Collector current		$I_C$	600		mA
Total device dissipation FR-5 board (1)	$T_A = 25^\circ C$	$P_D$	225		mW
	Derate above $25^\circ C$		1.8		
Thermal resistance(1)	Junction to ambient	$R_{\theta JA}$	556		$^\circ C/W$
Total device dissipation alumina substrate(2)	$T_A = 25^\circ C$	$P_D$	300		mW
	Derate above $25^\circ C$		2.4		
Thermal resistance(2)	Junction to ambient	$R_{\theta JA}$	417		$^\circ C/W$
Operating junction temperature range		$T_J$	-55 to +150		$^\circ C$
Storage temperature range		$T_{STG}$	-55 to +150		$^\circ C$

1.FR-5 = 1.0 X 0.75 X 0.062 in.

2.Alumina = 0.4 X 0.3 X 0.024 in. 99.5% alumina.

## MMBT2222 / MMBT2222A

## ELECTRICAL CHARACTERISTICS (TA = 25°C unless otherwise noted)

Characteristics		Symbol	Min	Max	Unit
<b>OFF CHARACTERISTICS</b>					
Collector-Emitter Breakdown Voltage (IC=10 mAdc, IB=0)	MMBT2222 MMBT2222A	V(BR)CEO	30 40	- -	Vdc
Collector-Base Breakdown Voltage (IC=10 µAdc, IE=0)	MMBT2222 MMBT2222A	V(BR)CBO	60 75	- -	Vdc
Emitter-Base Breakdown Voltage (IE=10 µAdc, IC=0)	MMBT2222 MMBT2222A	V(BR)EBO	5.0 6.0	- -	Vdc
Collector Cutoff Current (VCE=60 Vdc, VEB (off)=3.0 Vdc)	MMBT2222A	ICEX	-	10	nAdc
Collector Cutoff Current (VCB=50 Vdc, IE=0)	MMBT2222	ICBO	-	0.01	µAdc
(VCB=60Vdc, IE=0)	MMBT2222A		-	0.01	
(VCB=50Vdc, IE=0, TA=125 °C)	MMBT2222		-	10	
(VCB=60Vdc, IE=0, TA=125 °C)	MMBT2222A		-	10	
Emitter Cutoff Current (VEB=3.0 Vdc, IC=0)	MMBT2222A	IEBO	-	100	nAdc
Base Cutoff Current (VCE=60Vdc, VEB(off)=3.0Vdc)	MMBT2222A	IBL	-	20	nAdc

## ELECTRICAL CHARACTERISTICS (TA = 25°C unless otherwise noted) (Continued)

Characteristics		Symbol	Min	Max	Unit
<b>ON CHARACTERISTICS</b>					
DC Current Gain		hFE			
(IC=0.1 mAdc, VCE=10 Vdc)			35	-	
(IC=1.0 mAdc, VCE=10 Vdc)			50	-	
(IC=10 mAdc, VCE=10 Vdc)			75	-	
(IC=10 mAdc, VCE=10 Vdc, TA=-55°C)	MMBT2222A ONLY		35	-	
(IC=150 mAdc, VCE=10 Vdc) (3)			100	300	
(IC=150 mAdc, VCE=1.0Vdc) (3)			50	-	
(IC=500 mAdc, VCE=10 Vdc) (3)	MMBT2222 MMBT2222A	30 40	- -		
Collector-Emitter Saturation Voltage (3)	MMBT2222 MMBT2222A	VCE(sat)	-	0.4	Vdc
(IC=150 mAdc, IB=15mAdc)			-	0.3	
(IC=500 mAdc, IB=50mAdc)	MMBT2222 MMBT2222A		-	1.6	
			-	1.0	
Base-Emitter Saturation Voltage (3)	MMBT2222 MMBT2222A	VBE(sat)	-	1.3	Vdc
(IC=150 mAdc, IB=15mAdc)			0.6	1.2	
(IC=500 mAdc, IB=50mAdc)	MMBT2222 MMBT2222A		-	2.6	
			-	2.0	

## MMBT2222 / MMBT2222A

ELECTRICAL CHARACTERISTICS (T<sub>A</sub> = 25°C unless otherwise noted) (Continued)

Characteristics	Symbol	Min	Max	Unit
<b>SMALL-SIGNAL CHARACTERISTICS</b>				
Current-Gain-Bandwidth Product (4) (I <sub>C</sub> =20 mA <sub>dc</sub> , V <sub>CE</sub> =20 V <sub>dc</sub> , f=100MHz)	MMBT2222 MMBT2222A f <sub>T</sub>	250 300	- -	MHz
Output Capacitance (V <sub>CB</sub> =10 V <sub>dc</sub> , I <sub>E</sub> =0, f=1.0MHz)	MMBT2222 MMBT2222A C <sub>obo</sub>	-	8.0	pF
Input Capacitance (V <sub>EB</sub> =0.5 V <sub>dc</sub> , I <sub>C</sub> =0, f=1.0MHz)	MMBT2222 MMBT2222A C <sub>ibo</sub>	- -	30 25	pF
Input Impedance (I <sub>C</sub> =1.0 mA <sub>dc</sub> , V <sub>CE</sub> =10 V <sub>dc</sub> , f=1.0 kHz) (I <sub>C</sub> =10 mA <sub>dc</sub> , V <sub>CE</sub> =10 V <sub>dc</sub> , f=1.0 kHz)	MMBT2222A MMBT2222A h <sub>ie</sub>	2.0 0.25	8.0 1.25	kΩ
Voltage Feedback Ratio (I <sub>C</sub> =1.0 mA <sub>dc</sub> , V <sub>CE</sub> =10 V <sub>dc</sub> , f=1.0 kHz) (I <sub>C</sub> =10 mA <sub>dc</sub> , V <sub>CE</sub> =10 V <sub>dc</sub> , f=1.0 kHz)	MMBT2222A MMBT2222A h <sub>re</sub>	- -	8.0 4.0	x 10 <sup>-4</sup>
Small-Signal Current Gain (I <sub>C</sub> =1.0 mA <sub>dc</sub> , V <sub>CE</sub> =10V <sub>dc</sub> , f=1.0 kHz) (I <sub>C</sub> =10 mA <sub>dc</sub> , V <sub>CE</sub> =10V <sub>dc</sub> , f=1.0 kHz)	MMBT2222A MMBT2222A h <sub>fe</sub>	50 75	300 375	-
Output Admittance (I <sub>C</sub> =1.0 mA <sub>dc</sub> , V <sub>CE</sub> =10V <sub>dc</sub> , f=-1.0kHz) (I <sub>C</sub> =10 mA <sub>dc</sub> , V <sub>CE</sub> =10V <sub>dc</sub> , f=-1.0kHz)	MMBT2222A MMBT2222A h <sub>oe</sub>	5.0 25	35 200	μmhos
Collector Base Time Constant (I <sub>E</sub> =20 mA <sub>dc</sub> , V <sub>CB</sub> =20 V <sub>dc</sub> , f=31.8 MHz)	MMBT2222A r <sub>b</sub> , C <sub>C</sub>	-	150	ps
Noise Figure (I <sub>C</sub> =100μA <sub>dc</sub> , V <sub>CE</sub> =10V <sub>dc</sub> , R <sub>S</sub> =1.0kΩ, f=1.0 kHz)	MMBT2222A NF	-	4.0	dB

## SWITCHING CHARACTERISTICS (MMBT2222A only)


Delay Time	(V <sub>CC</sub> =30 V <sub>dc</sub> , V <sub>BE</sub> (off)=-0.5V <sub>dc</sub> , I <sub>C</sub> =150 mA <sub>dc</sub> , I <sub>B1</sub> =15 mA <sub>dc</sub> )	t <sub>d</sub>	-	10	ns
Rise Time		t <sub>r</sub>	-	25	
Storage Time	(V <sub>CC</sub> =30 V <sub>dc</sub> , I <sub>C</sub> =150 mA <sub>dc</sub> , I <sub>B1</sub> =I <sub>B2</sub> =15 mA <sub>dc</sub> )	t <sub>s</sub>	-	225	ns
Fall Time		t <sub>f</sub>	-	60	

3. Pulse Test: Pulse Width 300 μs, Duty Cycle ≤ 2.0%.


4. f<sub>T</sub> is defined as the frequency at which I<sub>hfe</sub> extrapolates to unity.

## Rating and characteristic curves (MMBT2222 / MMBT2222A)


**Typical Pulsed Current Gain vs Collector Current**

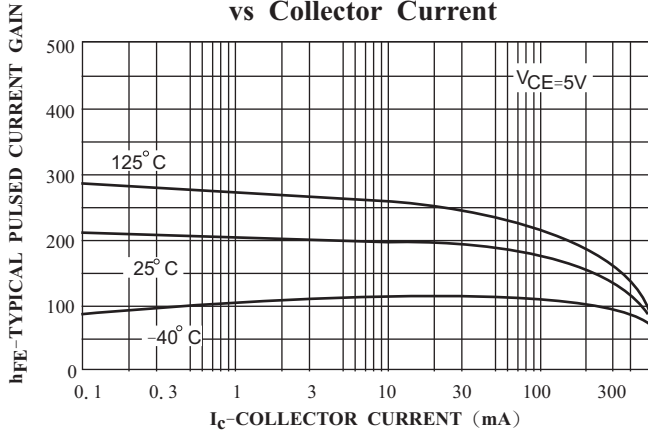


**Collector- Emitter Saturation Voltage vs Collector Current**

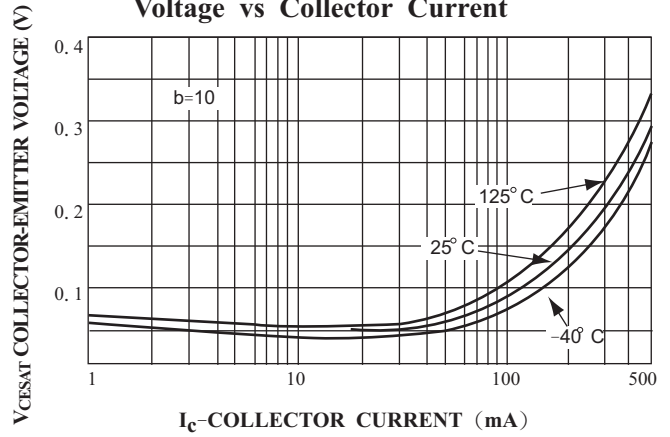


**Base-Emitter Saturation Voltage vs Collector Current**

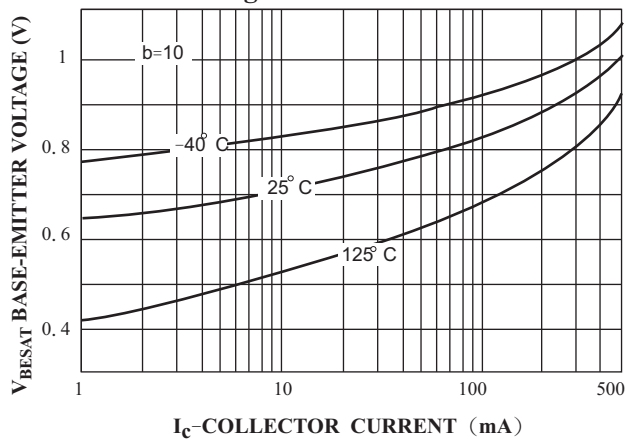


**Base-Emitter ON Voltage vs Collector Current**

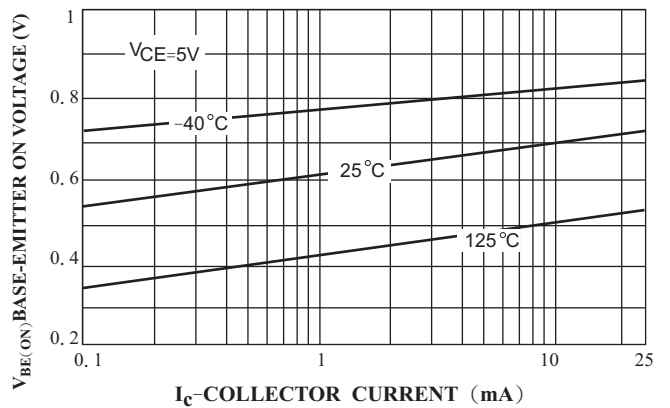

**Collector-Cutoff Current vs Ambient Temperature**

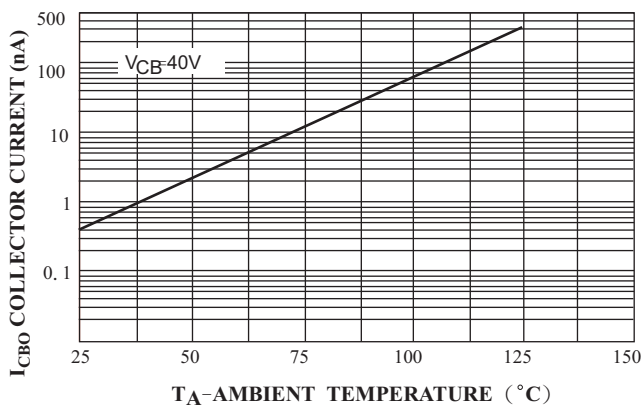


**Emitter Transition and Output Capacitance vs Reverse Bias Voltage**

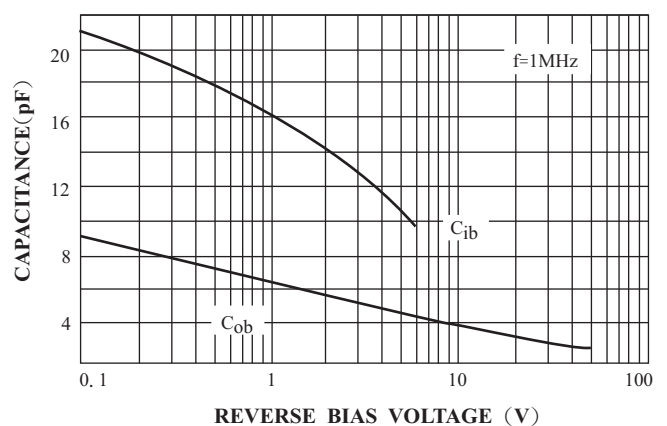


## Rating and characteristic curves (MMBT2222 / MMBT2222A)


Turn On and Turn Off Times vs Collector Current

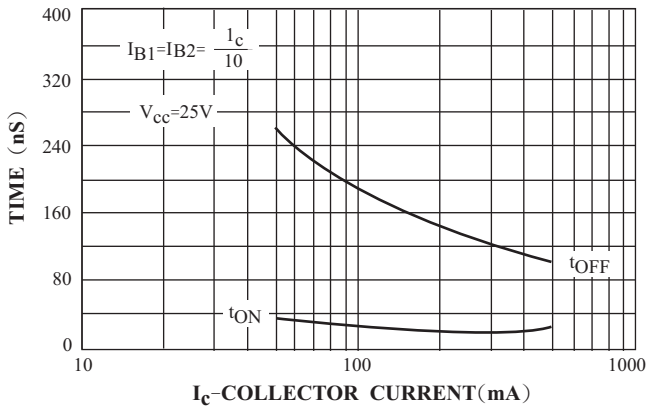


Switching Times vs Collector Current

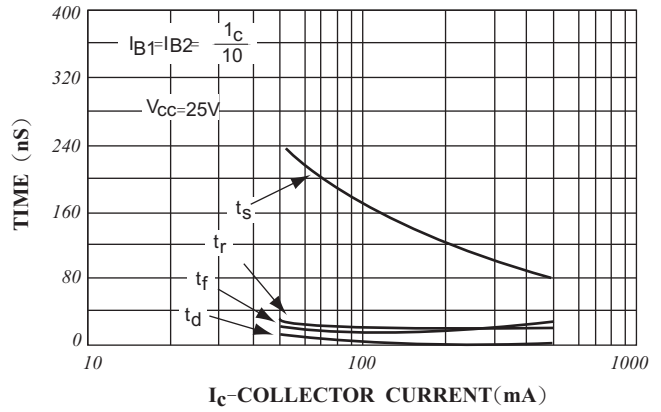


Power Dissipation vs Ambient Temperature

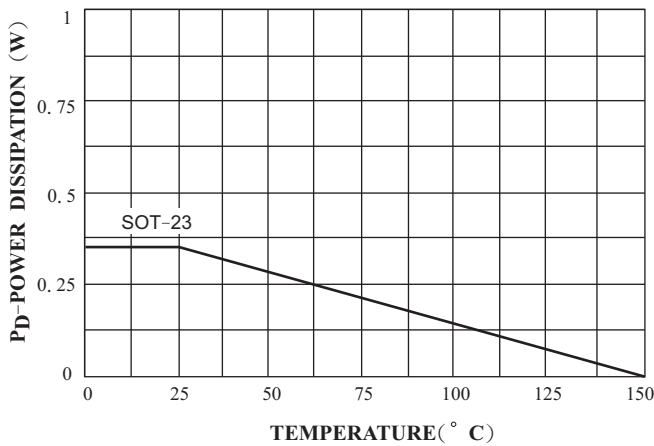

TEST CIRCUIT

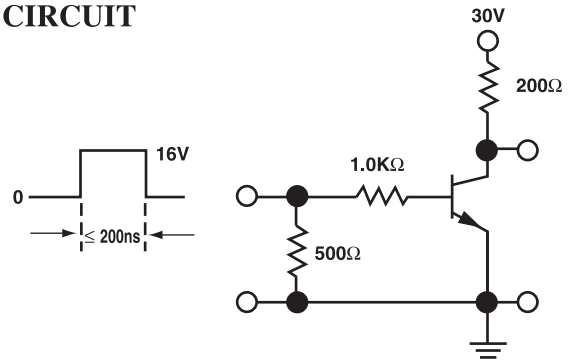



FIGURT 1: Saturated Turn-On Switching Time

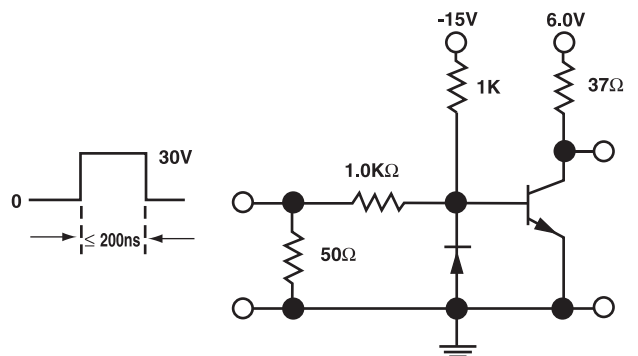

FIGURT 2: Saturated Turn-Off Switching Time

# MMBT2222 / MMBT2222A

## Pinning information

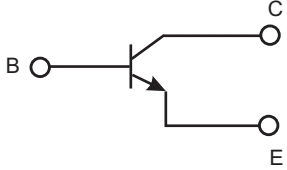
Pin	Simplified outline	Symbol
PinB Base PinC Collector PinE Emitter		

## Marking

Type number	Marking code
MMBT2222	M1B
MMBT2222A	1P

## Suggested solder pad layout

### SOT-23

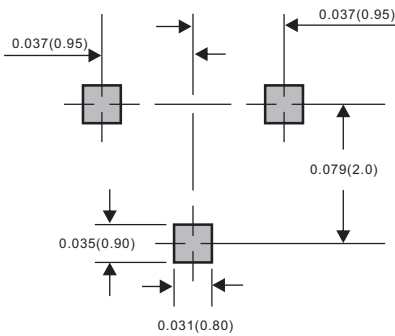

Dimensions in inches and (millimeters)

## Reel packing

PACKAGE	REEL SIZE	REEL (pcs)	COMPONENT SPACING (m/m)	BOX (pcs)	INNER BOX (m/m)	REEL DIA, (m/m)	CARTON SIZE (m/m)	CARTON (pcs)	APPROX. GROSS WEIGHT (kg)
SOT-23	7"	3,000	4.0	30,000	183*123*183	178	382*257*387	240,000	11.6

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bipolar Transistors - BJT category](#):*

*Click to view products by [Formosa manufacturer](#):*

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)  
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)  
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-](#)  
[TL-H](#) [2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)  
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)  
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)