


## Coaxial PCB Connector 82\_SMB-50-0-1/111\_N

### Description

Straight PCB jack

Interface Standards

IEC 60169-10\_MIL-STD-348A/311\_CECC 22130

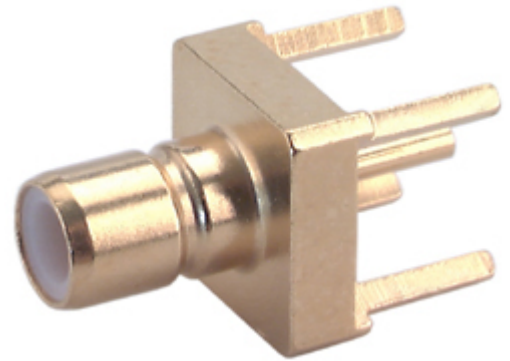

### Technical Data

#### Electrical Data

Impedance 50  $\Omega$   
Interface frequency max. 4 GHz

#### Mechanical Data

Board mounting type through holes  
Weight 0.0008 kg

#### Environmental Data

Operating temperature -65 °C to 165 °C  
2011/65/EU (RoHS) compliant

#### Material Data

Piece Parts	Material	Surface Plating
Centre contact	Brass	Gold Plating (Nickel underplated)
Outer contact	Brass	Gold Plating (Nickel underplated)
Body	Brass	Gold Plating (Nickel underplated)
Insulator	PFA / PTFE	

### Related Documents

Outline drawing DOU-00012686  
Catalogue drawing DCA-00012688

### Ordering Information

Single package 82\_SMB-50-0-1/111\_NE  
Bulk 100 pcs package 82\_SMB-50-0-1/111\_NH

### Remarks

PCB connector with stand-offs

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [RF Connectors / Coaxial Connectors](#) category:*

*Click to view products by [Huber & Suhner](#) manufacturer:*

Other Similar products are found below :

[R125315120](#) [8915-1511-000](#) [89674-0827](#) [5916-1103-603](#) [0106-001-000](#) [6-0001-3](#) [6001-7071-019](#) [6002-7051-003](#) [6002-7551-202](#) [6059674-1](#) [619550-1](#) [630059-000](#) [M39012/25-0021](#) [M39012/79-3008](#) [M39030/3-01N](#) [M39030/3-03N](#) [M3933/25-29N](#) [M3933/25-36N](#) [6500-7071-046](#) [6501-1071-002](#) [M83723/72W24576](#) [M83723/72W2457N](#) [6769](#) [CX050L2AQ](#) [7002-1541-010](#) [7003-1572-002](#) [7004-1512-000](#) [7009-1511-004](#) [7010-1511-000](#) [7029-1511-060](#) [7101-1541-010](#) [7101-1571-002](#) [7105-1521-002](#) [7145-1521-002](#) [7209-1511-011](#) [7210-1511-012](#) [7210-1511-015](#) [7210-1511-019](#) [7210-1511-040](#) [7225-1512-050](#) [7242-1511-000](#) [73137-5015](#) [73216-2241](#) [73251-0111](#) [73251-0672](#) [73276-1501](#) [73366-0013](#) [73404-2300](#) [73413-6080](#) [734151610](#)