


Pmod SF3 Board Reference Manual

Revised October 5, 2016

This manual applies to the Pmod SF3 rev. A

Overview

The Digilent Pmod SF3 (Revision A) provides 32MB of serial Flash Memory.

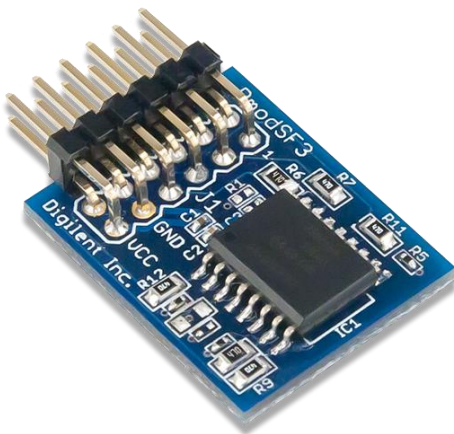

The Pmod SF3.

Features:

- 32MB serial NOR Flash Memory
- Supports extended SPI Protocol, Dual I/O, and Quad I/O
- Minimum 100,000 ERASE cycles per sector
- More than 20 years data retention
- 12-pin Pmod connector with SPI interface
- Follows Digilent Interface Specification Type 2A

1 Functional Description

The Pmod SF3 utilizes Micron's NOR Flash memory (N25Q256A) to provide easily accessed non-volatile memory to system boards. The data sheet can be found [here](#).

2 Interfacing with the Pmod

The Pmod SF3 communicates with the host board via the SPI protocol. By bringing the Chip Select line logic level low voltage, users may issue a single byte instruction code to memory chip. A table of available commands can be found in the data sheet for the N25Q256A [here](#) starting on page 28.

The memory is byte-addressed with the range of 0x000000 to 0x1FFFFFF and is organized into 256 byte pages, 4 KB subsectors, and 64 KB sectors. The memory is written by using an Erase-Program cycle. The smallest programmable unit is one page and the smallest erasable unit is 1 subsector.

Users that wish to simply use the memory module without concerning themselves with the dual/quad input and output communication may use the example code and tutorials found on the Pmod SF3 [Resource Center](#).

3 Pinout Description Table

Pin	Signal	Description	Pin	Signal	Description
1	~CS	Chip Select	7	NC	Not Connected
2	MOSI/DQ0	Master-Out-Slave-In	8	NC	Not Connected
3	MISO/DQ1	Master-In-Slave-Out	9	W/DQ2	Write Protect
4	SCK	Serial Clock	10	HLD/DQ3	Hold
5	GND	Power Supply Ground	11	GND	Power Supply Ground
6	VCC	Power Supply (3.3V)	12	VCC	Power Supply (3.3V)

Any external power applied to the Pmod SF3 must be within 2.31V and 3.7V; it is strongly recommended the Pmod is operated at 3.3V. Bottom of Form

4 Physical Dimensions

The pins on the pin header are spaced 100 mil apart. The PCB is 1 inch long on the sides parallel to the pins on the pin header and 0.8 inches long on the sides perpendicular to the pin header.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Development Boards & Kits - Wireless](#) category:

Click to view products by [Digilent](#) manufacturer:

Other Similar products are found below :

[13237ADC-SFTW](#) [13237ADC-BDM](#) [SLWRB4542B](#) [SLWRB4546A](#) [CC-WMX51-LX](#) [TWR-13237](#) [TWR-13237-KIT](#) [DA14585-00VVDB-P](#)
[MKR MOTOR CARRIER](#) [AC164159](#) [RD-88MW322-R0](#) [RD-88MW320-R0](#) [FMC PCAM ADAPTER](#) [BLE 4 CLICK](#) [C METER CLICK](#)
[HALL CURRENT CLICK](#) [COLOR 3 CLICK](#) [COMPASS 2 CLICK](#) [COMPASS CLICK](#) [HDC1000 CLICK](#) [RELAY CLICK](#) [RIVERDI](#)
[CLICK](#) [CUGSM113#UFL](#) [R METER CLICK](#) [MATRIX G CLICK](#) [MATRIX RGB CLICK](#) [3D MOTION CLICK](#) [3G SARA CLICK](#)
[TDGL012](#) [4-20MA R CLICK](#) [4-20MA T CLICK](#) [THERMO CLICK](#) [MCP2003B CLICK](#) [EXPAND 3 CLICK](#) [MCP2542 CLICK](#) [MCP25625](#)
[CLICK](#) [ATA663211 CLICK](#) [ATA8520-EK3-E](#) [TOUCHKEY CLICK](#) [MICROSD CLICK](#) [TRF CLICK](#) [BUTTON R CLICK](#) [IR ECLIPSE](#)
[CLICK](#) [IRTHERMO 2 CLICK](#) [UNIQUE ID CLICK](#) [UV 2 CLICK](#) [CAN-SPI CLICK 3.3V](#) [CAN-SPI CLICK 5V](#) [CAP EXTEND CLICK](#)
[CAPSENSE CLICK](#)