

# Fuseholders 6.3 x 32mm (1 1/4" x 1/4")

## Approvals and specifications



**16A 250Vac (max fuse rating\*) T-55 to T+70 (ambient)**  
**Maximum dissipation wattage: 4W**



**16A UL 94V2 UL file E92075 CSA file LR44770**

These products comply with safety category PC2.  
 \*Users should be aware of the de-rating factors published by specialist manufacturers of fuses.

Fuseholders with in-line termination have combination (4.8/6.3) terminals. It has not been possible to show both views here. Units with right angle terminals have user specified end terminals and combination mid-body terminals.

- ▶ 6.3 x 32mm fuses
- ▶ Screwdriver slot knob
- ▶ PC2 protection category
- ▶ 4.8, 6.3 and solder terminals
- ▶ Low profile bezel
- ▶ Snap in or threaded bushing mounting options







**M873**  
Cover for C & T terminals



**A0035 00**  
In-line 6.3 x 32 (1 1/4 x 1/4) fuseholder  
Extra low voltage 5A Max

▶ TERMINAL	▶ BODY AND CAP	▶ PANEL HOLE
<p><b>C</b></p> <p>6.3 x 0.8</p>	<p><b>0345</b> (C terminal shown) Screwdriver release</p> <p>UL CS</p>	<p><b>RA</b></p> <p>16.0/16.1</p>
<p><b>D</b></p> <p>6.3 x 0.8 Right angle</p>	<p><b>0345</b> (D terminal shown) Screwdriver release</p> <p>UL CS</p>	<p>Panel thickness 0.8 - 2.0mm for snap fit 0.8 - 7.0mm for screw to panel fixing</p>
<p><b>T</b></p> <p>4.8 x 0.8 Solder</p>	<p><b>0347</b> (T terminal shown) Screwdriver release</p> <p>UL CS</p>	<p><b>RD</b></p> <p>16.0/16.1</p>
<p><b>U</b></p> <p>4.8 x 0.8 Right angle solder</p>	<p><b>0347</b> (U terminal shown) Screwdriver release</p> <p>UL CS</p>	<p>Panel thickness 0.8 - 2.0mm for snap fit 0.8 - 7.0mm for screw to panel fixing</p>

## DIMENSIONS (mm)

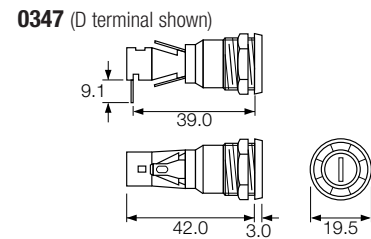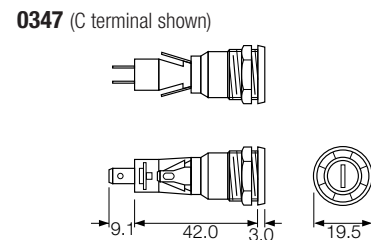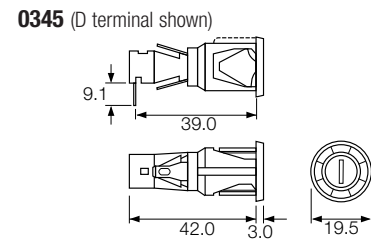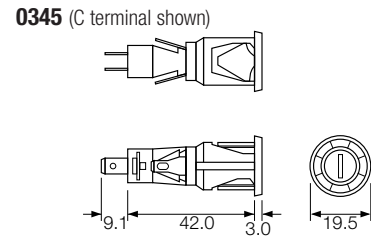

Optional metal fixing nut available for 0347

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fuse Holder](#) category:*

*Click to view products by [Bulgin](#) manufacturer:*

Other Similar products are found below :

[570-290-741P40](#) [570-290-751P40](#) [0031.1351.01](#) [020417G](#) [020418E](#) [80910030](#) [8601.2020](#) [9-3557-GP REV A](#) [15600-08-10](#) [BK1-HTC-45M](#)  
[BK/FHN19G](#) [BK/HJM-HH](#) [BK/HKP-CCHH](#) [BK/HKP-E-CC](#) [BK/HKP-E-HH](#) [BK/HKP-EH-HH](#) [BK/HKP-U-HH](#) [BK/HTJ-LES-FUSE](#)  
[HMG-241](#) [2086-1](#) [2193](#) [RTMF-SC](#) [2602](#) [2650](#) [FHN31G1](#) [G4PB8](#) [2660](#) [2799](#) [CQ-209V](#) [345621A](#) [3794](#) [4202](#) [4408](#) [4413](#) [4423](#) [4482](#)  
[4532](#) [4537](#) [TSD1404-12](#) [BK/FHN31G1](#) [BK/HKP-H-CC](#) [BK/HKP-JQ-BB](#) [BK/HKP-JQW-BB](#) [BK/HKP-N-HH](#) [BK/HKP-S-CC](#) [BK/HKP-W-](#)  
[BBHH](#) [BP/HHS](#) [BPHHU](#) [55900008011](#) [C1933](#)