




# Latching / Sequencing Relays

## 10 - 100 Amp

### Outline Dimensions

Dimensions Shown in inches & (millimeters)

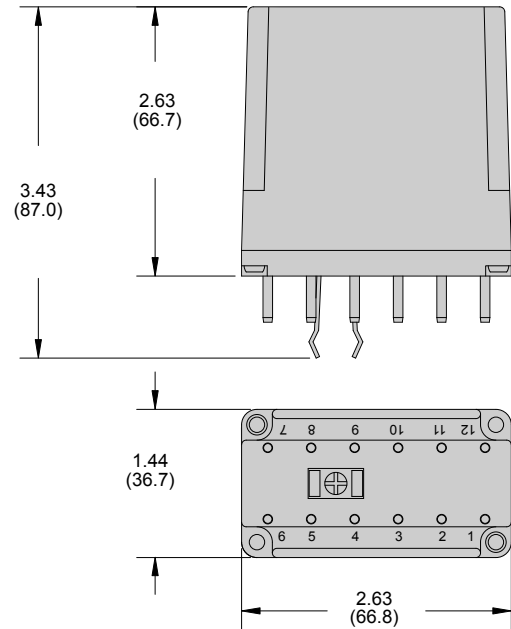

Section 4

### Coil Specifications

AC Coil, 50/60HZ		DC Coil	
Nominal voltage	Resistance ohms ±10%	Nominal voltage	Resistance ohms ±10%
6	1.1	6	15.5
12	4.2	12	63.5
24	15.5	24	250
120	540	48	970
240	1815	110-125	6200

**Ordering Code** 311 XBX P R L -120VAC

**Series**  
311

**Contact Arrangement**  
XBX (DPDT) - (2 form C)

**Standard Features**  
Plug-in with polycarbonate cover - CODE P

**Contact Transfer**  
When coil is energized - NO CODE  
When coil is de-energized - CODE R

**Optional Features**  
Indicator lamp - CODE L  
Coil suppression - CODE V

**Coil Voltage**  
AC: 6, 12, 24, 120, 240 (Add VAC)  
DC: 6, 12, 24, 115-125 (Add VDC)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Struthers-Dunn](#) manufacturer:*

Other Similar products are found below :

[5AXA46-24D](#) [M35AA-12D](#) [M35AB-480A](#) [M60AAA-24A](#) [FC-1-350](#) [FC-210-13](#) [FC-210-16](#) [FC-400-60](#) [FCA-325-5](#) [FCA-410-3](#) [84BXB-120A](#) [8611-4](#) [8AXA-480A](#) [PM-17AY-480VAC](#) [11AXA-240A](#) [A214XBX103](#) [A275KXX91-12D](#) [A311XBX118-24D](#) [A311XBX139-120A](#) [A311XBXP-24D](#) [A311XBXPR-12D](#) [A575KXX-24D](#) [12314](#) [MRR1ADS8-24D](#) [MRR1ADS8-5D](#) [MRR1ADSK-12D](#) [MRR1ADV-5D](#) [MRR1AM-6V](#) [MRR1BDS-24D](#) [MRR1CDL-5D](#) [MRR1CDL8-12D](#) [MRRDL1AS8-5D](#) [MRRK1B-12D](#) [MRRK2C106-15D](#) [15882](#) [B255XCXP69-125D](#) [175KXX-12A](#) [175KXX-24A](#) [C281XDX100-24A](#) [1XXB154-120A](#) [211XBX190-120A](#) [211XBXPR-24A](#) [214XBX-24D](#) [214XCX48P-115D](#) [219ABA148-125D](#) [219ABA153-120A](#) [219BBX201](#) [219BBXP33-12D](#) [219BBXP-33D](#) [219BBXPL-12D](#)