




Xenon Strobe - Visual Alarm ~ Yodac ~

Tom Cribb Road, Thamesmead, London SE28 0BH Tel: +44 (0)20 8316 4477 or (0)20 8317 1717

Fax: +44 (0)20 8317 2400 Email: cliffordandsnell@aol.com Web Site: www.cliffordandsnell.com




#### **DIMENSIONS (mm)**

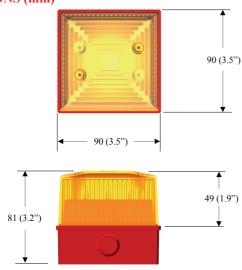

All dimensions quoted are approximate only and subject to change without notice as are technical features resulting from continual development and improvement.

#### CONFIGURATOR

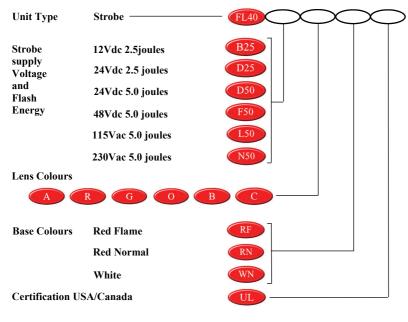

### MAIN FEATURES

- Continuously rated
- Strobe 2.5 and 5 joule
- High flash intensity
- 360 degree visibility
- Reliable and simple to install
- Complements audible alarm system
- Flush mounting base available
- Red / White flame retardant ABS plastic enclosure
- Lens colours: Amber (A), Red (R), Green (G), Opal (O), Blue (B) and Clear (C) made from flame retardant polycarbonate plastic.
- Steady lamp version available upon request

#### TECHNICAL SPECIFICATION

Operating temperature range -25 to +40 deg C Storage temperature range -40 to +70 deg C Relative humidity 90% @ 40 deg C

IP65 Rated

0.24Kg Weight: DC types AC types 0.22Kg

12Vdc or 24Vdc or 48Vdc Operating voltage 115Vac or 230Vac

- Current consumption (Flash Energy). See design data below.
- Flash rate 1 per second

#### **MOUNTING**

All units are supplied separate from the back box for ease of installation. The back box must be mounted with the two cable entries at the top or bottom. The back box should be mounted to a reasonably flat surface or to a standard wiring box, using any of the internal mounting holes. A gasket is supplied, should the surface be uneven, or if the unit is to be used in wet conditions. To maintain the integrity of the weather seal, the cable must be fitted using a suitable sealed gland. The installation is completed by fitting the beacon onto the back box by means of the supplied screws.

## **DESIGN DATA**

Operating Voltage	12Vdc	24Vdc 4	48Vdc	115Vac	230Vac
Flash Energy (Joules)	2.5	2.5 - 5	5	5	5
Light output, opal lens					
Candela sec	4.5	4.5 - 14	14	14	14
Current consumption					
(mA)	300	150 - 250	135	130	70
<b>CAUTION:</b> High voltages are present within the beacon when					

operational.

# **LINE MONITORING**

Monitoring via reverse polarity

End of line resistance. Minimum 3K3 ohms 0.5 watts wire-wound or metal film type

## APPROVAL SPECIFICATION

UL 1638

CAN/ULC-S526-M87









# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Clifford And Snell manufacturer:

Other Similar products are found below:

<u>YL50/L50/A/RF/WR</u> <u>YA80/D/RF/SU/WR</u> <u>YA40/D/RN/WR</u> <u>YA50/L/RF/WR</u> <u>YL40/N50/A/RN/WR</u> <u>YL40/D50/A/RN/WR</u> FD40/D00/A/RN/8 FL40/N50/R/RN YL50/N50/R/RF/WR YA50/N/RF/WR YA50/D/RF/WR YL50/D50/R/RF/WR YA30/D/RF/WR