





B-6 Single Bayonet Base



Part Number	Design Voltage	Amps	MSCP	Life Hours	Filament Type	Comments
CM1317	6.0	.45	3.4	100	C-6	
CM209	6.5	1.78	15.0	100	C-6	
CM105	12.8	1.00	12.0	500	C-6	
CM1003	12.8	.94	15.0	100	C-6	
CM601-1	28.0	.56	-	2,000	CC-81	Blk. Bonnet
CM1308	28.0	.56	16.0	2,000	CC-81	
CM1309	28.0	.52	15.0	300	2C-2R	

B-3 1/2 Single Contact Miniature Flange Base

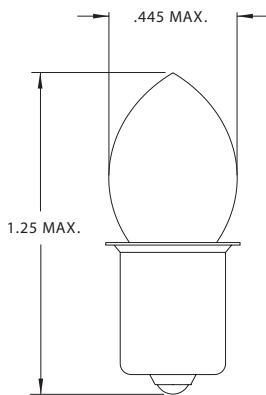

Part Number	Design Voltage	Amps	MSCP	Life Hours	Filament Type	Comments
PR8	1.90	.60	.65	10	C-2R	
PR1	2.00	.95	1.00	40	C-2R	
PR28	2.20	.80	.90	20	C-6	
PR4	2.33	.27	.40	10	C-2R	
PR5	2.35	.35	.45	35	C-2R	
PR2	2.38	.50	.80	15	C-2R	
KPR102	2.40	.70	1.30	15	C-2R	Kryton Gas Fill
KPR131	2.40	.84	1.47	15	C-2R	Kryton Gas Fill
PR6	2.47	.30	.45	30	C-2R	
PR9	2.70	.15	.25	45	C-2R	
CM395X	3.00	.07	.15	50	S-2	
PR3	3.57	.50	1.50	15	C-2R	
KPR103	3.60	.70	2.70	15	C-2R	Kryton Gas Fill
PR29	3.60	.20	.60	30	C-2R	
PR7	3.70	.30	.90	30	C-2R	
PR30	3.75	.86	2.25	40	C-2R	
PR13	4.75	.50	2.00	15	C-2R	
KPR113	4.80	.70	4.06	15	C-2R	Kryton Gas Fill
PR15	4.82	.50	2.00	30	C-2R	
PR17	4.90	.30	1.20	30	C-2R	
PR12	5.95	.50	3.00	15	C-2R	
KPR118	7.20	.55	5.23	15	C-2R	Kryton Gas Fill
PR18	7.20	.55	4.20	20	C-2R	
PR20	8.63	.50	5.00	15	C-2R	
PR16	12.50	.25	2.70	50	C-2R	

147 Central Avenue
Hackensack, NJ 07601
Phone: (201) 489-8989
Fax: (201) 489-6911

18703 Dix Toledo Road
Brownstown, MI 48193

Saret Zone Franca, Edificio B
Alajuela Costa Rica

E-mail: sales@chml.com • Web Site: www.chml.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Chicago Miniature](#) manufacturer:

Other Similar products are found below :

[5305H1/5](#) [6091QM1-12V](#) [7011X1/5-100](#) [93](#) [PR18](#) [13](#) [15](#) [1493](#) [1731](#) [1874](#) [2110QA2](#) [212-2](#) [2150QA4](#) [2330D4](#) [248](#) [2620T1](#) [293](#) [2990D4-6V](#) [2990P3-6V](#) [301](#) [3015](#) [1680](#) [1705](#) [2150A2](#) [2158](#) [2191U5-6V](#) [GF660](#) [PLS13W/50](#) [24ES](#) [PR15](#) [2990D1-6V](#) [2990P1-12V](#) [2990P6-28V](#) [CMD11-21VGC-100](#) [CMD11-21VRC-100](#) [CMD55AB](#) [CMD5760](#) [303](#) [4302H1-5V](#) [455](#) [4610](#) [4745A](#) [5300A75](#) [5307H3](#) [3122](#) [5635D1](#) [4106-W-19.25](#) [4300E11NF](#) [4327](#) [1032D5](#)