


# DTS-25-CC CURRENT COMPENSATED CHOKES




## APPLICATIONS:


- Common-mode noise suppression on an AC power supply line and signal/data line

## ORDERING CODE:


DTS -25 /150 /1,9 CC

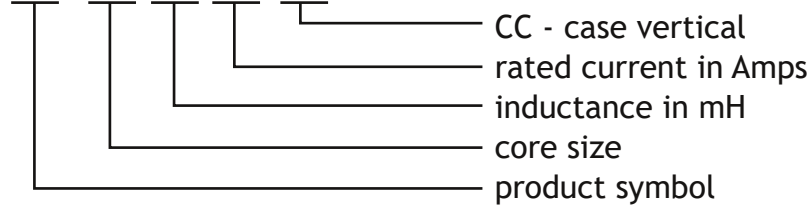

## DIMENSIONS:

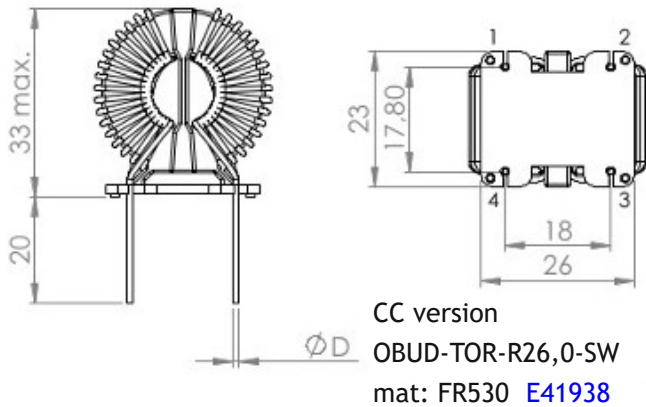

## FOOTPRINTS:

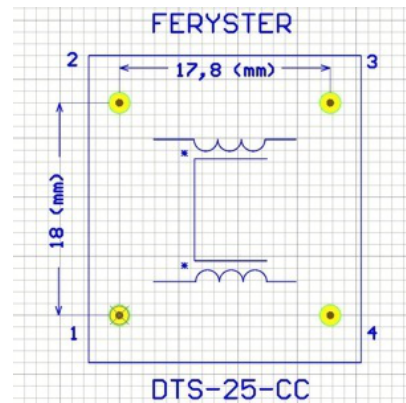


## PROPERTIES:

Part number	L <sub>nom</sub> [mH]	I <sub>nom</sub> [A]	RDC [Ω]	Mounting version	ØD[mm]
				V	
DTS-25/1,0/18-CC	2x1,0	18	2x0,005	✓	1,7
DTS-25/1,5/15-CC	2x1,5	15	2x0,008	✓	1,6
DTS-25/2,2/11,3-CC	2x2,2	11,3	2x0,013	✓	1,4
DTS-25/3,3/11,3-CC	2x3,3	11,3	2x0,014	✓	1,4
DTS-25/4,7/9,8-CC	2x4,7	9,8	2x0,019	✓	1,3
DTS-25/6,8/7,8-CC	2x6,8	7,8	2x0,035	✓	1,2
DTS-25/10/7,8-CC	2x10	7,8	2x0,029	✓	1,2
DTS-25/15/6,3-CC	2x15	6,3	2x0,051	✓	1,1
DTS-25/22/4,0-CC	2x22	4,0	2x0,124	✓	0,8
DTS-25/33/4,0-CC	2x33	4,0	2x0,127	✓	0,8
DTS-25/47/3,3-CC	2x47	3,3	2x0,175	✓	0,8
DTS-25/68/2,8-CC	2x68	2,8	2x0,250	✓	0,7
DTS-25/100/2,4-CC	2x100	2,4	2x0,366	✓	0,7
DTS-25/150/1,9-CC	2x150	1,9	2x0,521	✓	0,6


- Inductance tolerance: -20% +50%
- LCR meter f=10kHz
- Dielectric withstanding voltage 2000V
- RDC Cu wire resistance  $\pm 20\%$

### CHARACTERISTICS:



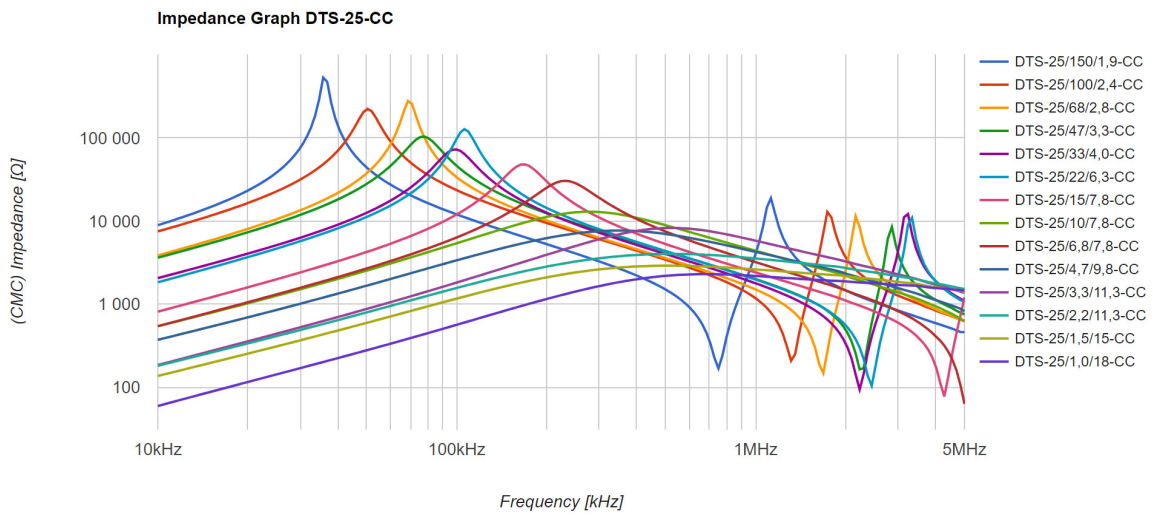





### MEASUREMENT METHOD:




- Measured with RIGOL DSA815.



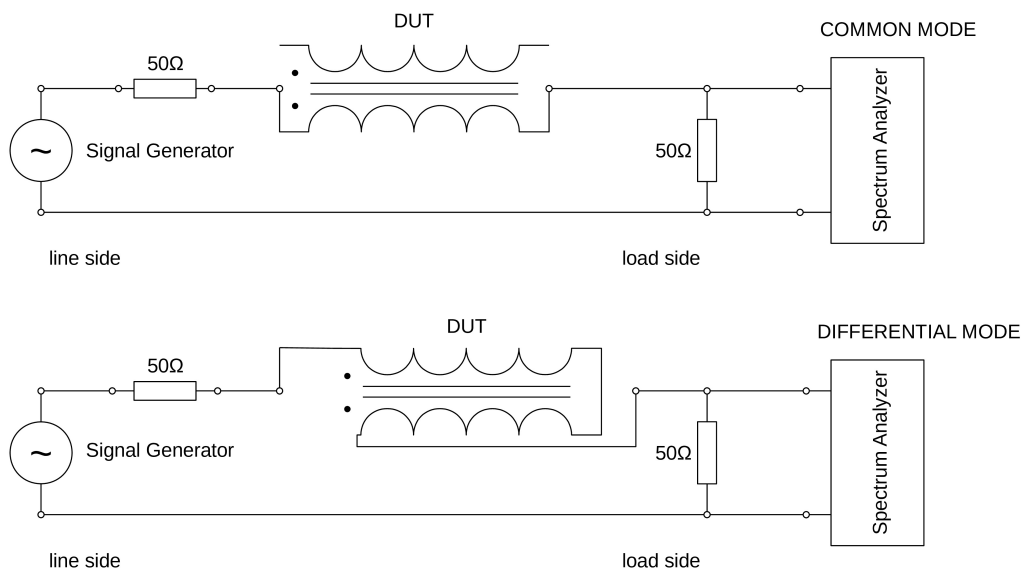




ATTENUATION:

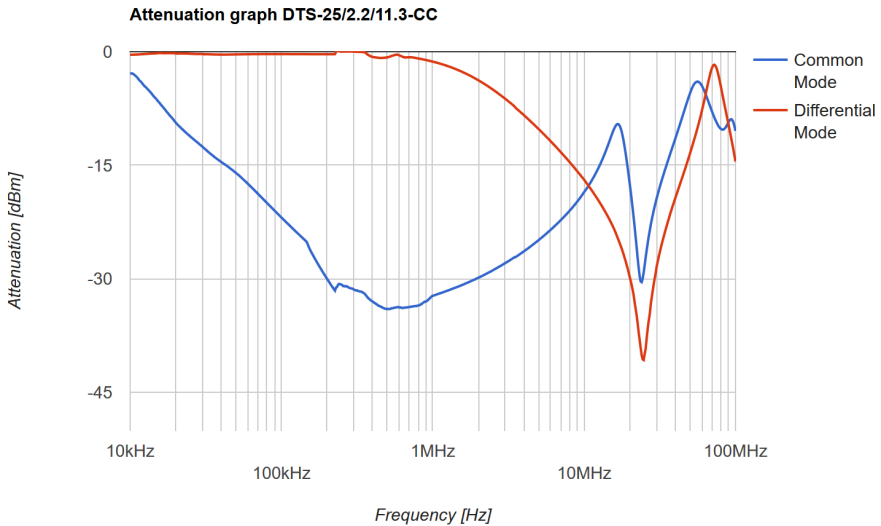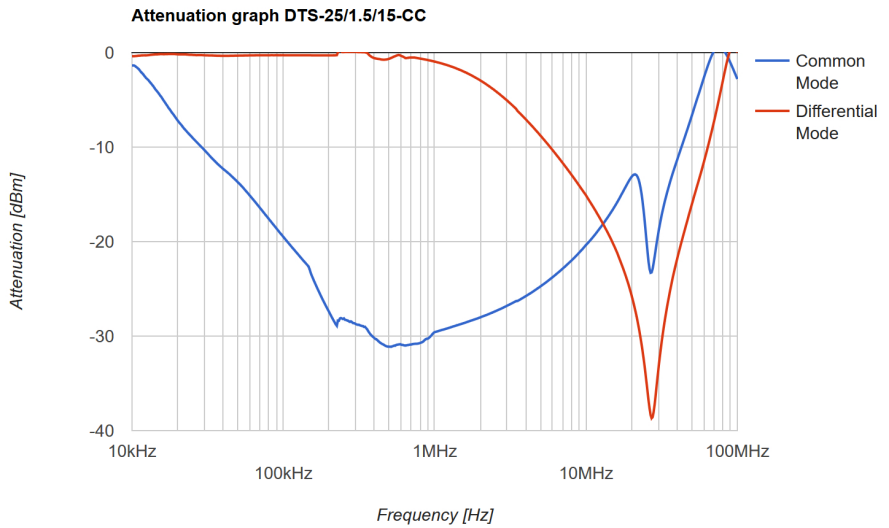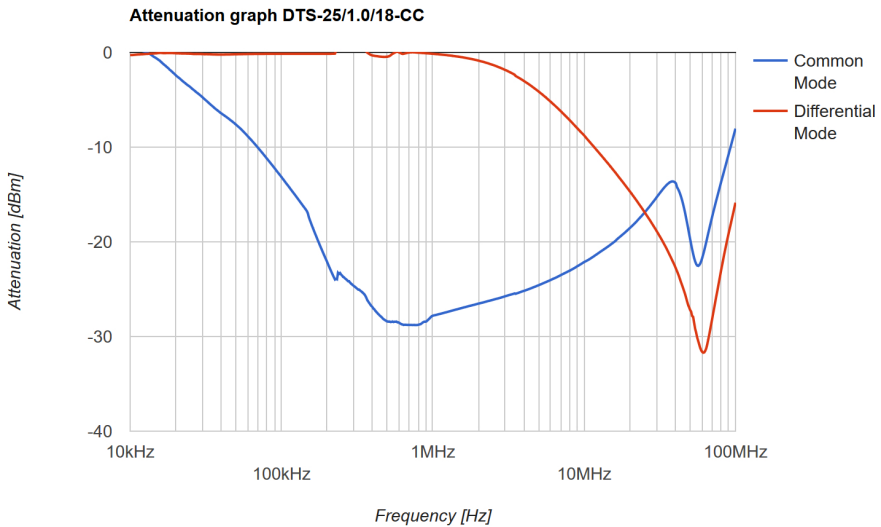

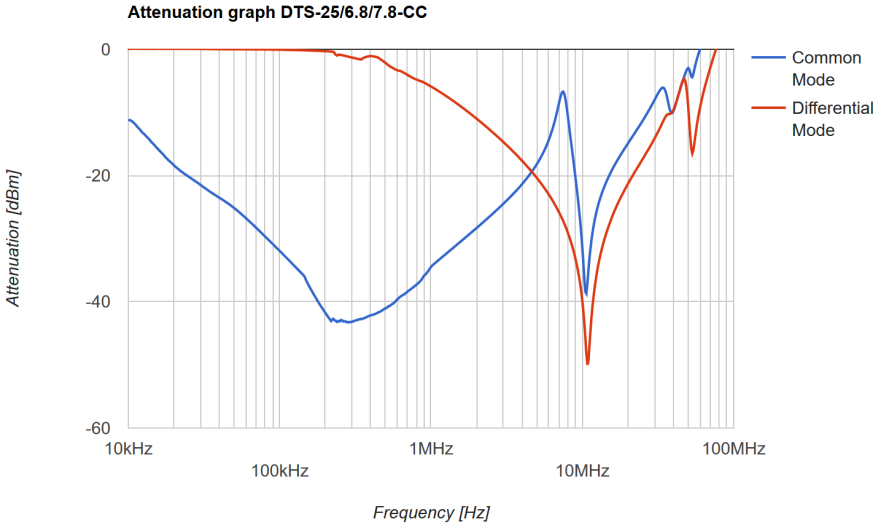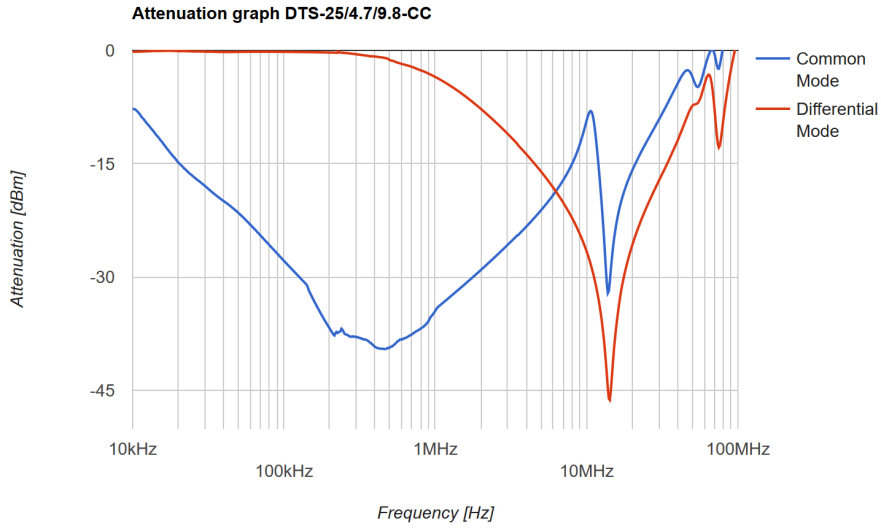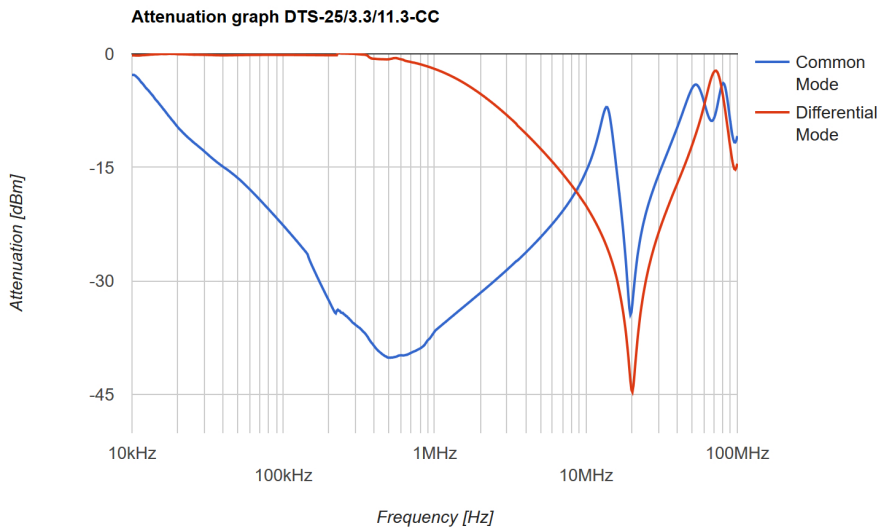


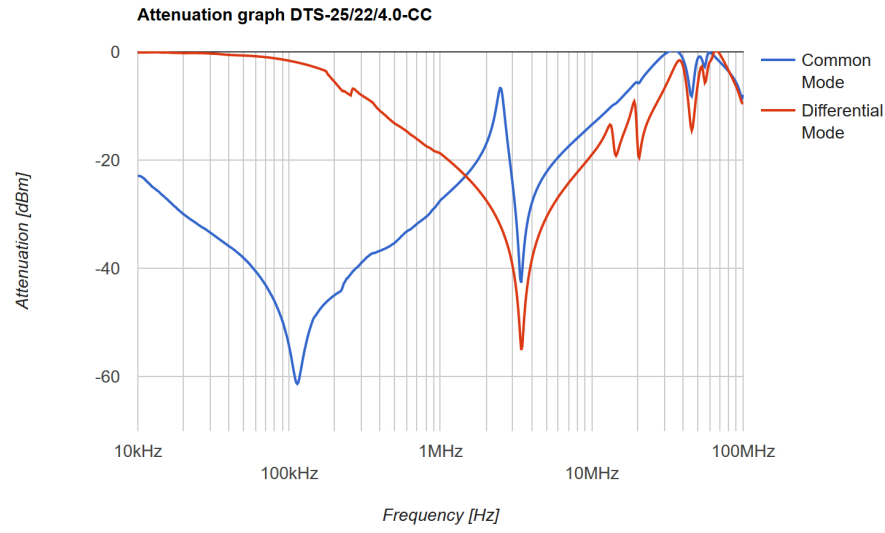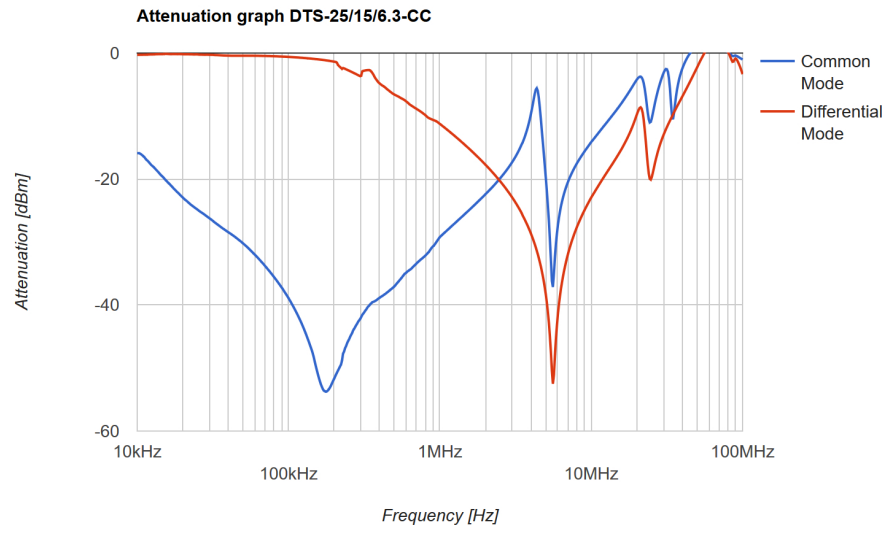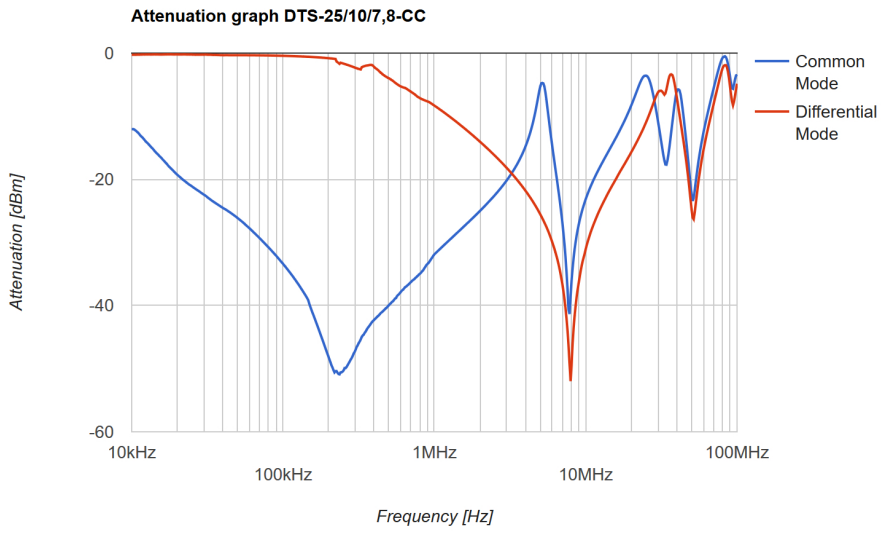

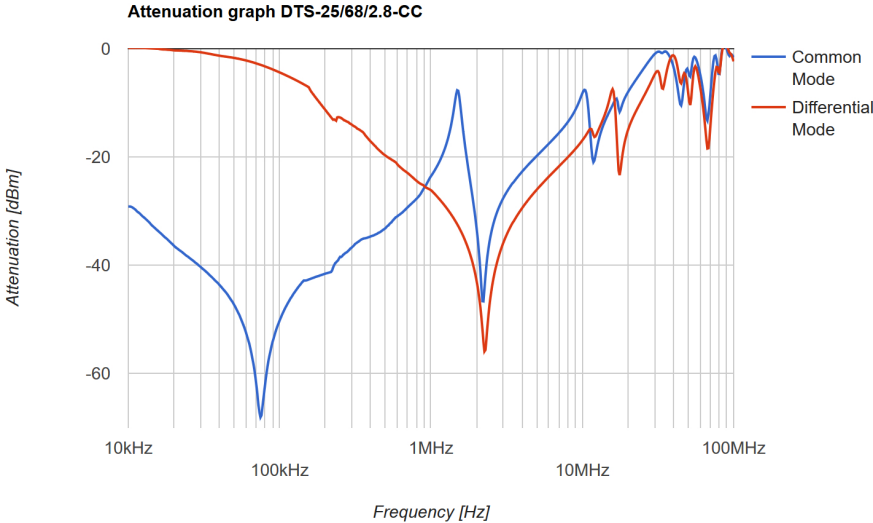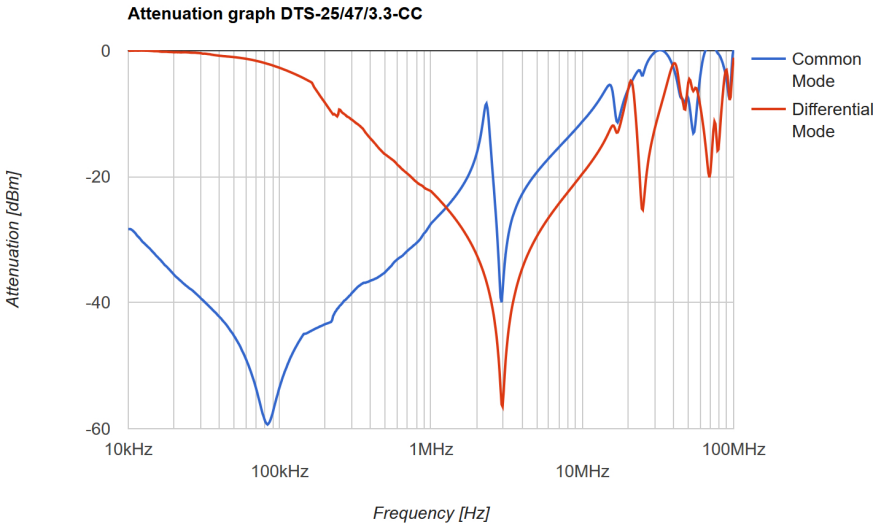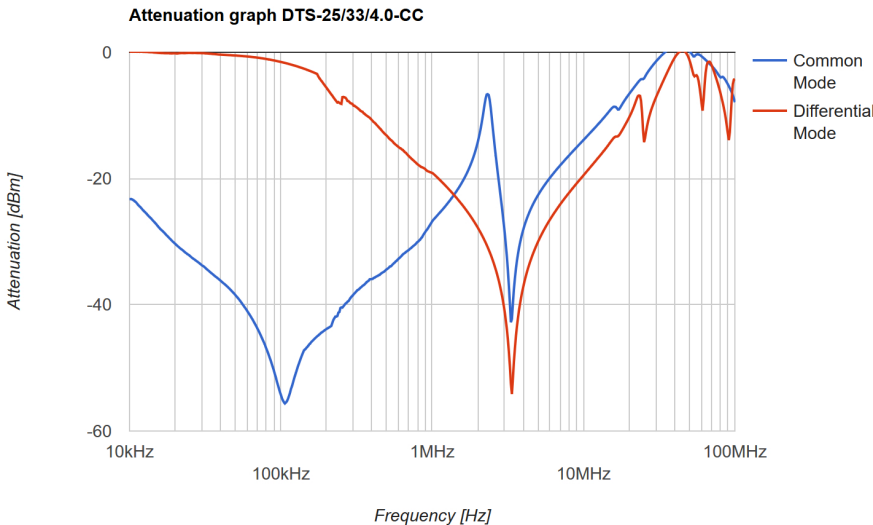


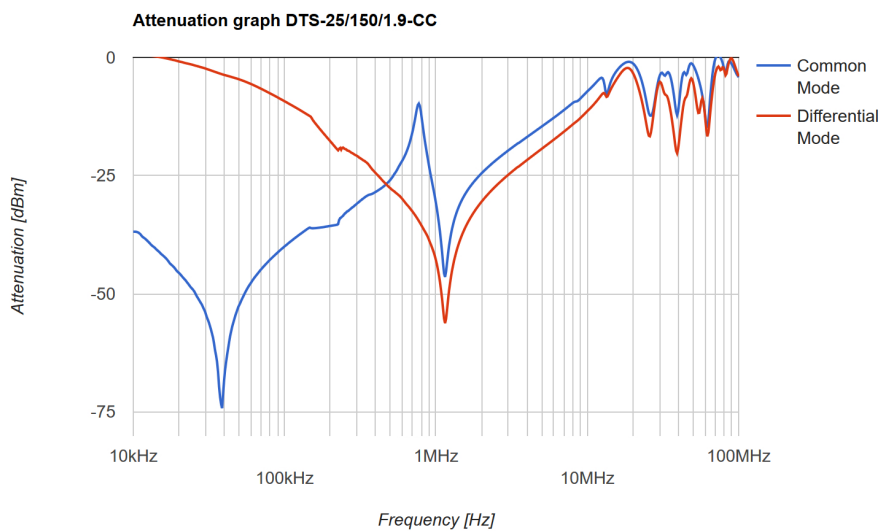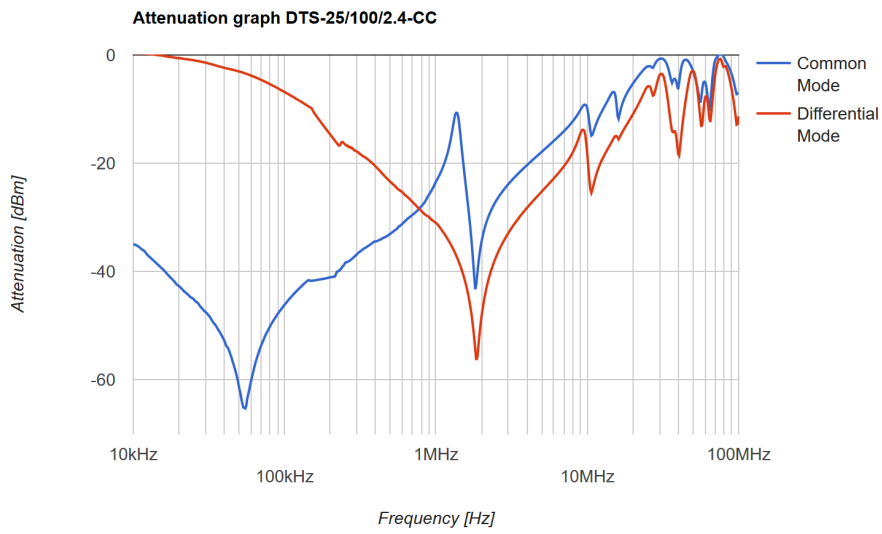

**COMMON MODE ATTENUATION:**

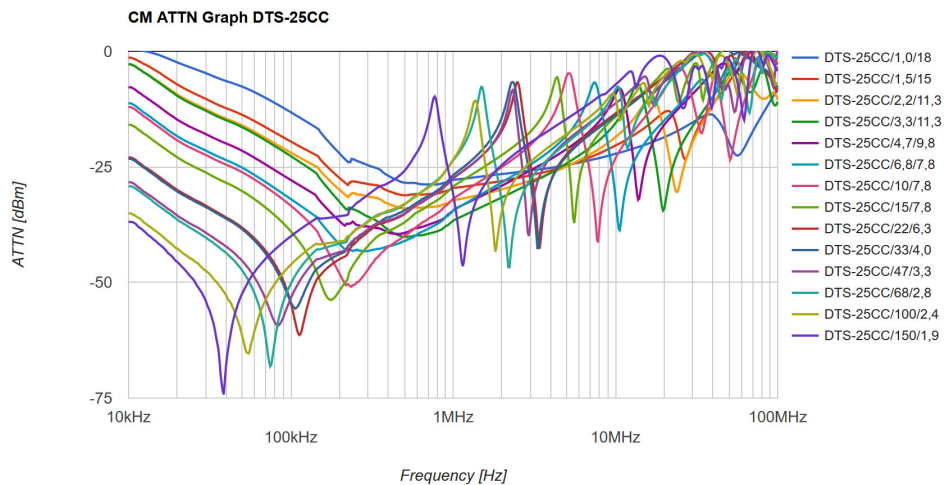

DIFFERENTIAL MODE ATTENUATION:

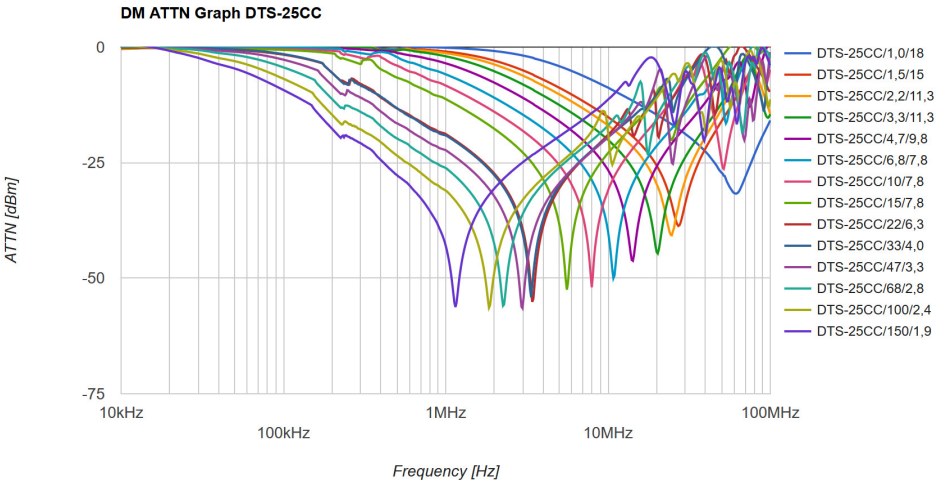



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [Feryster](#) manufacturer:*

Other Similar products are found below :

[MLZ1608M6R8WTD25](#) [MLZ1608N6R8LT000](#) [MLZ1608N3R3LTD25](#) [MLZ1608N3R3LT000](#) [MLZ1608N150LT000](#)

[MLZ1608M150WTD25](#) [MLZ1608M3R3WTD25](#) [MLZ1608M3R3WT000](#) [MLZ1608M150WT000](#) [MLZ1608A1R5WT000](#)

[MLZ1608N1R5LT000](#) [B82432C1333K000](#) [PCMB053T-1R0MS](#) [PCMB053T-1R5MS](#) [PCMB104T-1R5MS](#) [CR32NP-100KC](#) [CR32NP-](#)

[151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#)

[CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#)

[MGDQ4-00004-P](#) [MGDU1-00016-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-](#)

[62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [PM06-2N7](#) [PM06-39NJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC8-1R2-R](#)