

## LED light bar OPBRGB5060-03012WL - PRODUCT DATASHEET



<b>Voltage</b>	12 V DC
<b>Power</b>	7,2 W/m
<b>Luminocity</b>	RGB
<b>Qty LED</b>	30 LED/m
<b>Distance between LED</b>	33,3 mm
<b>Can be cut into section</b>	10 cm


Powered by

### Basic information:

- PL LINE PRODUCT- PROFESSIONAL LINE, HIGHEST QUALITY, LUMINOSITY AND DURABILITY
- PROFESSIONAL PCB MOUNTING, ONLY BRAND-NAME LED DIODES (LITEON)
- MODULES CAN BE SPLIT INTO 10 CM SECTIONS (3LED)
- MODULES CAN BE JOINED INTO LONGER STRINGS (MAXIMUM LENGHT OF LED SECTION WITH ONE POWER-SUPPLY POINT: 5M)

### Typical application:

- DECORATIVE LIGHTING
- CEILING, WALL, NICHE, SHELF, PASSAGeways BACKLIGHTING
- ADVERTISING (SIGNBOARDS): SHOP, MUSEUM, TARDE FAIRS EXPOSITIONS ETC.

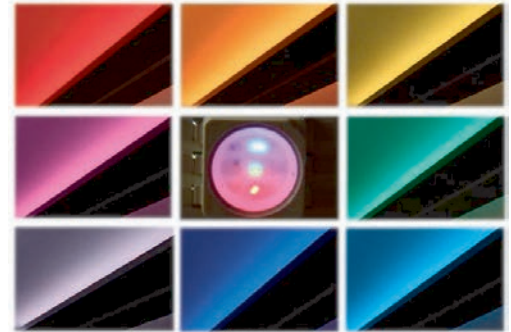

UWAGA  
ZACHOWAĆ OSTROŻNIEŚĆ  
ELEMENTY WRAŻLIWE  
NA WYŁĄCZANIĘ  
ELEKTROSTATYCZNE




PRODUKT WYKONANY  
Z PRZEDSIĘWZIĘCIEM  
ZGODNYM Z NORMATY  
RoHS



IP20

### Additional Information

Color	Red R	Green G	Blue B
<b>Voltage</b>		12 V DC	
<b>Power</b>		7,2 W/m	
<b>Power of single LED</b>		0,24 W	
<b>Current</b>		0,6 A/m	
<b>Luminocity</b>	35 lm/m	120 lm/m	30
<b>Qty LED</b>		30 LED/m	
<b>Distance between LED</b>		33,3 mm	
<b>Can be cut into section</b>		10 cm	
<b>Width</b>		10 mm	
<b>Height</b>		3 mm	
<b>Color temperature / Wavelength scope</b>	619-635 nm	512-528 nm	463-475 nm
<b>Beam angle</b>		120°	
<b>Color rendering index (Ra)</b>		-	
<b>Operating temperature</b>		-25 - +60°C	
<b>Storage temperature</b>		-40 - +80°C	
<b>IP degree</b>		IP20	



In spite of all our efforts, we do not guarantee, that technical data doesn't include any mistakes or defects, which can't be basis of any claiming. Figures and pictures are for illustration only and can be different from authentic appearance of product.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LED Lighting Bars and Strips](#) category:*

*Click to view products by [Optoflash](#) manufacturer:*

Other Similar products are found below :

[ZLF0310W62524](#) [LF1D-F2F-2W-300](#) [HH-SWW320F210W24-COB IP65](#) [HH-SNW320F210W12-COB IP65](#) [HH-SNW320F010W12-COB IP20](#) [HH-SNW320F210W24-COB IP65](#) [HH-SNW320F010W24-COB IP20](#) [HH-SNW528F210W12-COB IP65](#) [HH-SNW528F010W12-COB IP20](#) [HH-SNW528F010W24-COB IP20](#) [HH-SCW320F210W12-COB IP65](#) [HH-SCW320F010W12-COB IP20](#) [HH-SCW528F210W12-COB IP65](#) [HH-SCW528F010W12-COB IP20](#) [HH-SR528F010W12-COB IP20](#) [HH-SR528F010W24-COB IP20](#) [LF2D-EN2F-2W-A](#) [PUUA-100LLL-NK2P](#) [HC-F12V-3535 PCBA](#) [HC-F12V-WS2811-3535](#) [HC-F24V-6L-36LED-W-WS2821/IP20](#) [HC-F5V-144L-144LED-B-WS2813 IP20](#) [HC-F5V-144L-144LED-B-WS2813 IP65](#) [HC-F5V-144L-144LED-W/IP65](#) [HC-F5V-144L-144LED-W-WS2813 IP20](#) [HC-F5V-30L-30LED-B-WS2813 IP20](#) [HC-F5V-60L-60LED-B-WS2813 IP20](#) [HC-F5V-60L-60LED-W-WS2813 IP65](#) [HC-T12V-10L-30LED-W/IP20](#) [HC-T12V-16L-48LED-W/IP20](#) [HC-T12V-16L-48LED-W/IP65](#) [HC-T12V-20L-60LED-W/IP65](#) [LFBHL-SW860-24V-12D83-20](#) [LFBLL-SW860-24V-5S200-20-IC](#) [LFBML-MW827860-24V-12D83-20](#) [LFBML-SW827-24V-6S167-20](#) [LM-SAG1-W2](#) [LMV-MINI-W2](#) [LS-2835W120RN](#) [LS-2835W120RN1](#) [LS-2835W60RN2](#) [LS-2835WW120R-1](#) [LS-2835WW60RN](#) [LS-3014WW60RN](#) [LS-3014WW60RN3](#) [LS-3528W60RN-1](#) [LS-3528W60RN-2](#) [LS-5050F60R-2](#) [LS-5050F60RN-3](#) [LS-5050W30RN](#)