

MOD - 29

Temperature Monitoring System And Not Just - for Nettemp and Raspberry Pi



Dedicated for software:


NETTEMP (techfreak.pl/nettemp)

In cooperation with:



Store: store.modulowo.com
Tutorials: academy.modulowo.com
Documentation and schematics: products.modulowo.com
Software and projects: app.modulowo.com
Blog: blog.modulowo.com

Modułowo sp. z o.o.
ul. Mokotowska 1,
00-640 Warsaw, POLAND
E-mail: info@modulowo.com

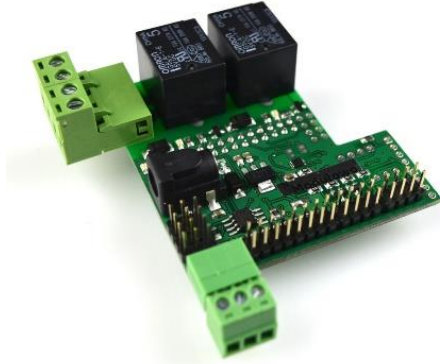

The Nettemp System is used to monitor the temperature and other parameters and present the results in the form of statistics on the server's website built on Raspberry Pi or another platform based on Linux as well as provide control. It has a user interface for easy configuration of sensors, parameter setting and measurement monitoring.

Note! This module is designed for system Nettemp (Software Page: techfreak.pl/nettemp). The software is available on GitHub.

This module has an I2C/1-Wire (DS2482) converter to which the DS18B20 temperature sensors can be connected with the use of two or three wires. The converter supports up to 8 sensors. The temperature sensors can also be connected to GPIO4. I2C, UART and SPI Interfaces are available as well. The module has 2 built-in GPIO-controlled relays. Due to the level of Raspberry Pi's operating voltage, which is 3.3 V, logic level converters are built-in (TXB0102 and BSS138 transistors). As a result, one I2C and UART connector can be used to connect additional units operating at a voltage of +5V (**Note!** Connectors that support +5V are indicated in the manual; not all connectors support +5V). The available interfaces can be used to connect, for example, the LCD module (controlled by I2C), DHT11, DHT22, HTU21D humidity sensors, TSL2561 lighting sensor or pressure sensors. The SPI connector can be used to connect an nRF24L01 radio module. **The 1-Wire bus enables the connection of multiple sensors to a single line, which means that there is no need to connect wires to each individual sensor.** The module has a built-in +5V voltage regulator and a DC connector for additional supply, max. +12V; it may also require the installation of a small radiator for the voltage regulator. In addition, the DC connector has a built-in Polymer Fuse with a value of 750mA (which is resettable, so you can just disconnect the power supply to make it work properly again).


Your list of modules

Each module has a unique serial number. Go to www.modulowo.com/list, enter the serial number and add the module to your list. This will allow quick access to the documentation and software.


Specifications:

Code and Product Name	MOD-29 Temperature Monitoring System And Not Just – for Nettemp and Raspberry Pi
Integrated Circuit	DS2482, TXB0102, LM1117-5.0
Protection	Polymer Fuse 750mA for DC Connector
Input Pins	Raspberry Pi Connector
Output Pins	I2C, SPI, UART, 1-Wire
Power	from Raspberry Pi, additional power supply from DC Connector: +7 to +12V
LED Indication	yes
Dimensions	64 mm x 58 mm
Configuration	Vref for 1-Wire, VCC for GPIO24 pin
Additional Information	built-in + 5V stabiliser
	For safety reasons , we recommend that you connect to the relay voltage of max. + 12V
	additional sensors can be connected , for example: temperature and humidity DHT11, DHT22, HTU21D , lighting TSL2561 or pressure

Pinouts:

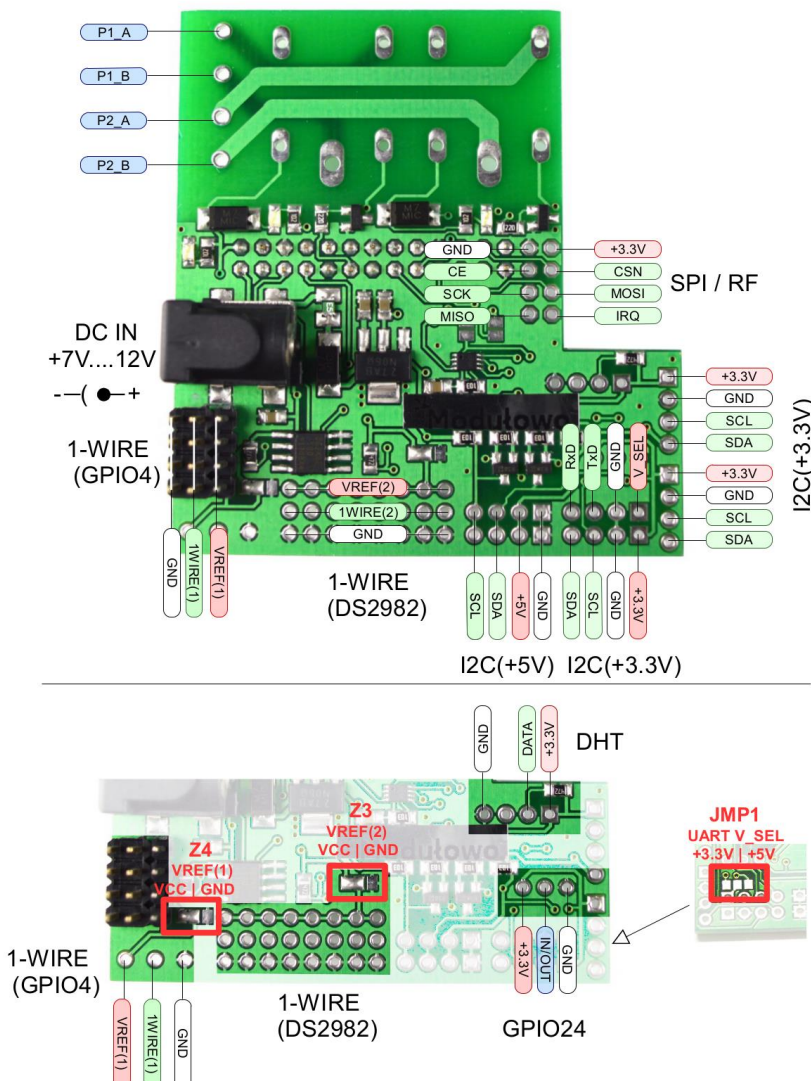

Schematic:

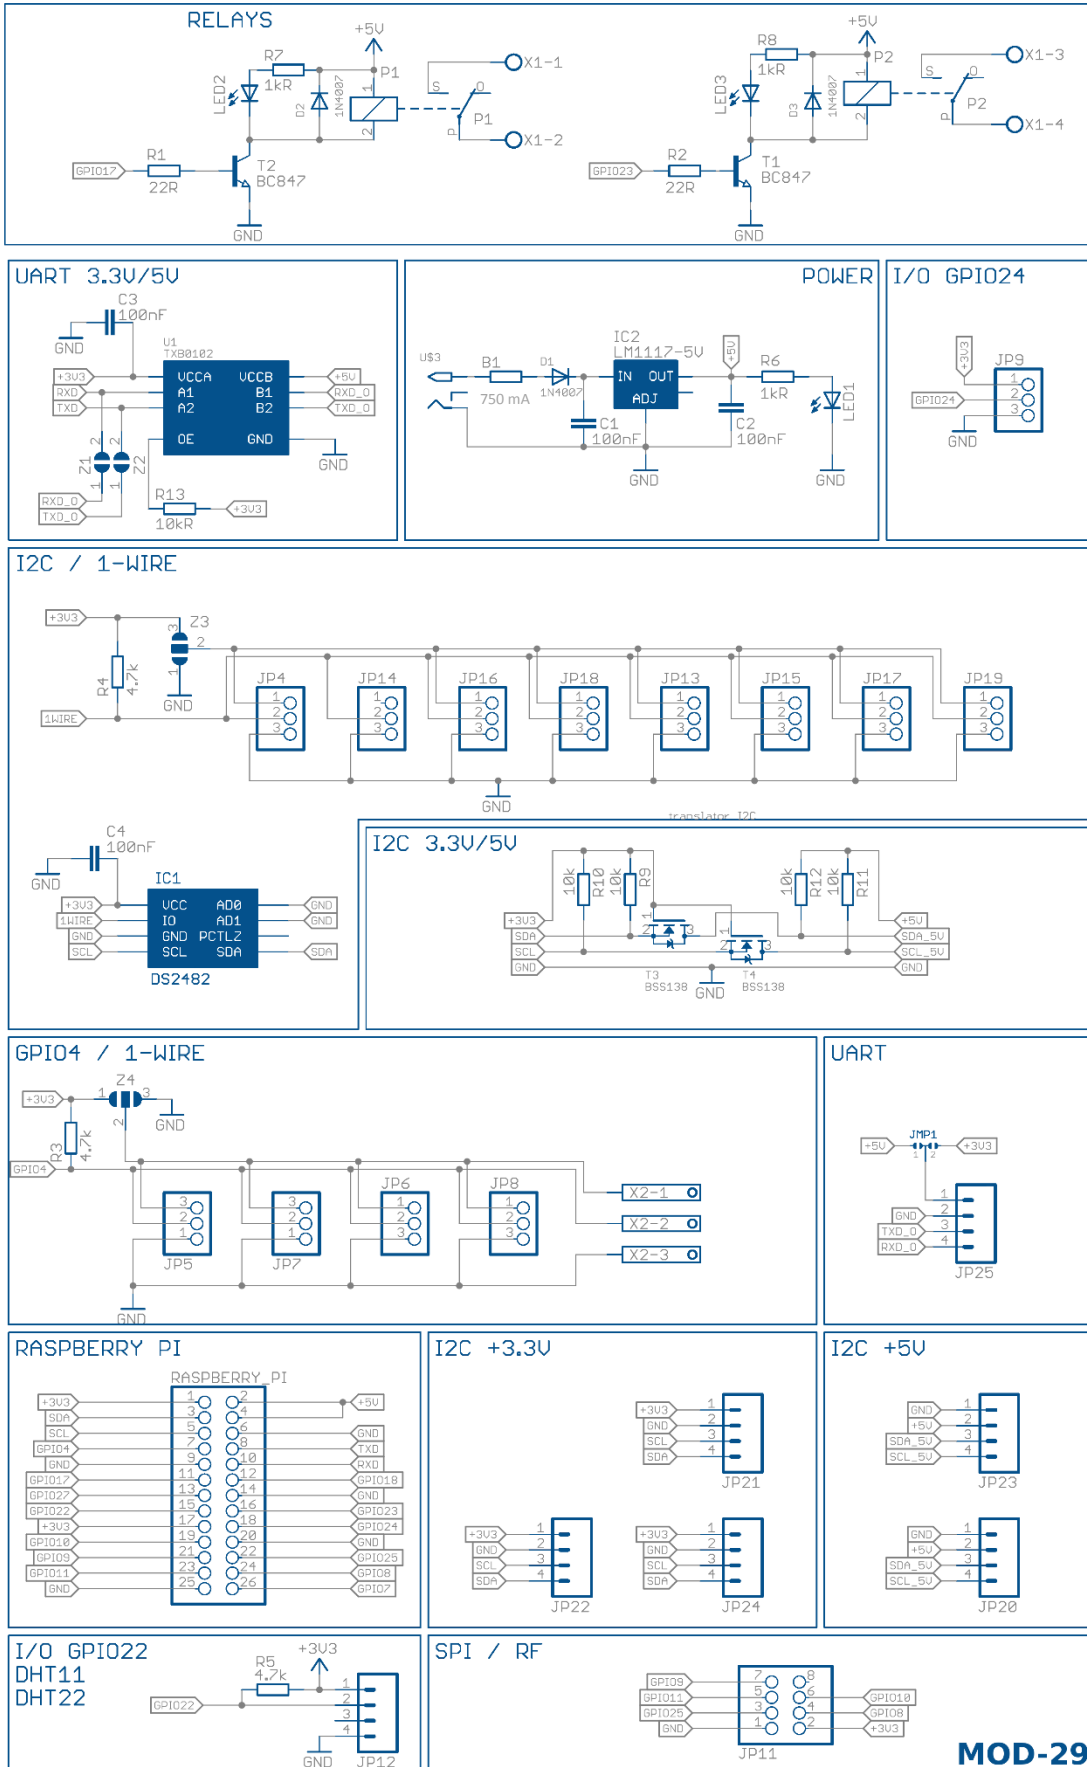

07012015

Modulowo assumes no liability or responsibility for any errors or inaccuracies that may appear in this document. Modulowo may make changes to specifications and product descriptions at any time, without notice. Copyright © 2015 Modulowo. All rights reserved.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Development Boards & Kits - Other Processors](#) category:

Click to view products by [MODULOGY](#) manufacturer:

Other Similar products are found below :

[KIT_AURIX_TC233LP_TRB](#) [EVB-MEC1418MECC](#) [SPC56XVTOP-M](#) [ADZS-BF506F-EZLITE](#) [ADZS-SADA2-BRD](#) [20-101-1252](#)
[T1023RDB-PC](#) [20-101-1267](#) [T1042D4RDB-PA](#) [ML610Q174](#) [REFERENCE BOARD](#) [MPC574XG-MB](#) [BSC9132QDS](#) [C29XPCIE-RDB](#)
[KIT_TC1793_SK](#) [CC-ACC-18M433](#) [P1010RDB-PB](#) [P1020RDB-PD](#) [P2020COME-DS-PB](#) [STM8S/32-D/RAIS](#) [T4240RDB-PB](#) [TRK-USB-](#)
[MPC5604B](#) [TWR-56F8200](#) [CY3674](#) [SPC58XXADPT176S](#) [MAX1464EVKIT](#) [TRK-MPC5606B](#) [RTE510Y470TGB00000R](#) [STM8128-](#)
[MCKIT](#) [MAXQ622-KIT#](#) [YRPBRL78G11](#) [SPC58EEMU](#) [QB-R5F10JGC-TB](#) [YQB-R5F11BLE-TB](#) [SPC564A70AVB176](#)
[RTE5117GC0TGB00000R](#) [QB-R5F100LE-TB](#) [YR0K50571MS000BE](#) [YQB-R5F1057A-TB](#) [QB-R5F104PJ-TB](#) [CC-ACC-ETHMX](#)
[LFM34INTPQA](#) [SPC563M64A176S](#) [Y-BLDC-SK-RL78F14](#) [P1021RDB-PC](#) [SPC58XCADPT176S](#) [RTE510MPG0TGB00000R](#)
[YRPBRX71M](#) [LFMAJ04PLT](#) [KITAURIXTC234LPSTRBTOBO1](#) [OV-7604-C7-EVALUATION-BOARD](#)