



### E 9F PV cylindrical fuses for photovoltaic plants


The new cylindrical fuses range E 9F PV is meant to protect against overcurrents in photovoltaic plants up to 1000 V in direct current.

Thanks to the wide sizes range, (from 1A up to 30A), and to the high nominal voltage: 1000V D.C. E 9F PV it's the best way to protect strings, inverters and OVR surge protections.

Rated Current In	Description		Weight kg	Packaging
	Type	ABB Code		
1 A	E 9F1 PV	2CSM213455R1801	0,007	10
2 A	E 9F2 PV	2CSM213465R1801	0,007	10
3 A	E 9F3 PV	2CSM213475R1801	0,007	10
4 A	E 9F4 PV	2CSM213485R1801	0,007	10
5 A	E 9F5 PV	2CSM213495R1801	0,007	10
6 A	E 9F6 PV	2CSM213505R1801	0,007	10
7 A	E 9F7 PV	2CSM213515R1801	0,007	10
8 A	E 9F8 PV	2CSM213525R1801	0,007	10
10 A	E 9F10 PV	2CSM213535R1801	0,007	10
12 A	E 9F12 PV	2CSM213545R1801	0,007	10
15 A	E 9F15 PV	2CSM213555R1801	0,007	10
20 A	E 9F20 PV	2CSM213565R1801	0,007	10
25 A	E 9F25 PV	2CSM213575R1801	0,007	10
30 A	E 9F30 PV	2CSM213585R1801	0,007	10

5


### Overall Dimensions

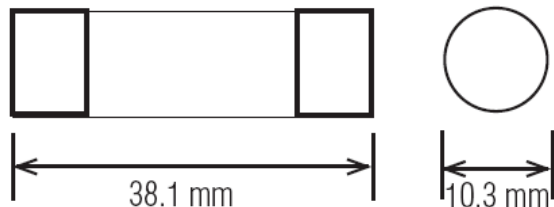


### Technical Features

Rated Voltage	[V]	1.000 c.c.
Rated Current	[A]	1...30
Breaking Capacity	[kA]	50
Minimum Breaking Capacity		From 1A up to 7A = 1.3 x In
		From 8A up to 30A = 2.0 x In
Overall Dimensions	[mm]	10,3x38
Weight	[g]	7


Type	Curve I <sup>2</sup> t (A <sup>2</sup> s)	Power consumption [W]
E 9F1 PV	-	0.32
E 9F2 PV	-	0.43
E 9F3 PV	-	1.04
E 9F4 PV	-	1.03
E 9F5 PV	-	1.04
E 9F6 PV	-	1.05
E 9F7 PV	-	1.05
E 9F8 PV	-	1.01
E 9F10 PV	83	
E 9F12 PV	127	
E 9F15 PV	215	
E 9F20 PV	495	
E 9F25 PV	755	
E 9F30 PV	970	
E 9F30 PV	1650	

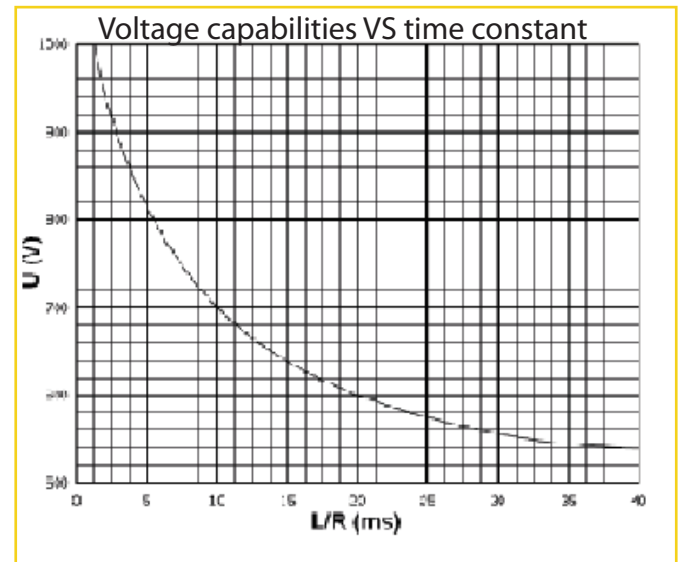

## Melting Time

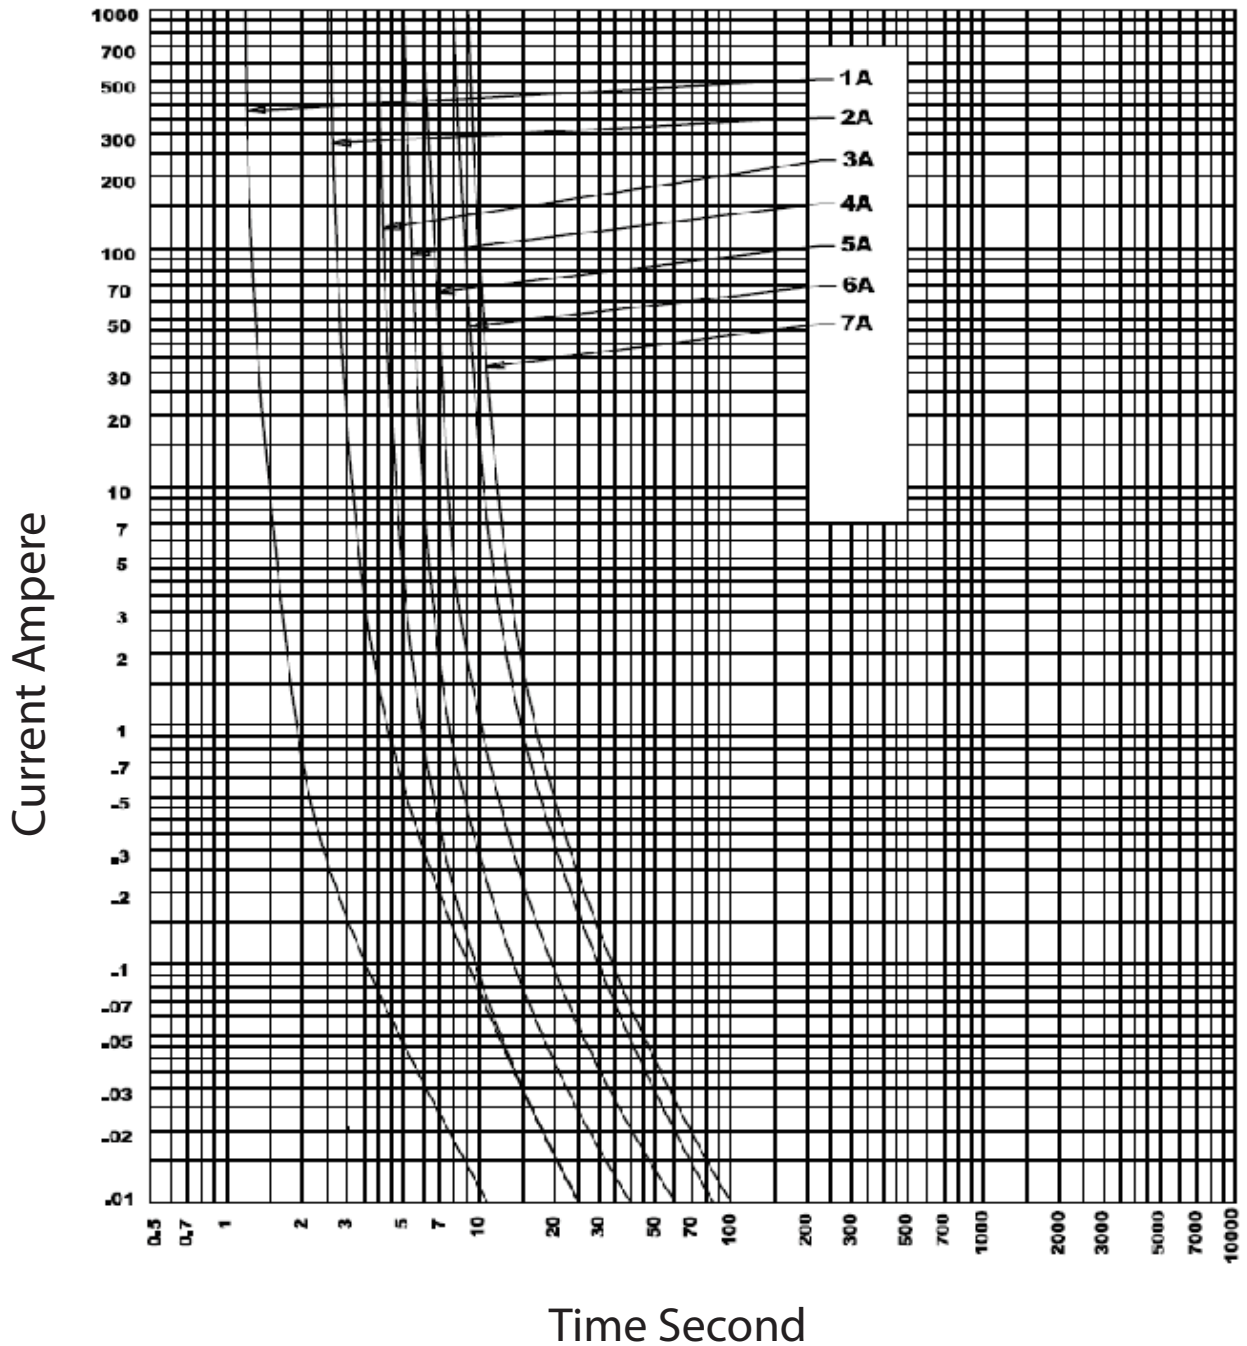

### Melting Time

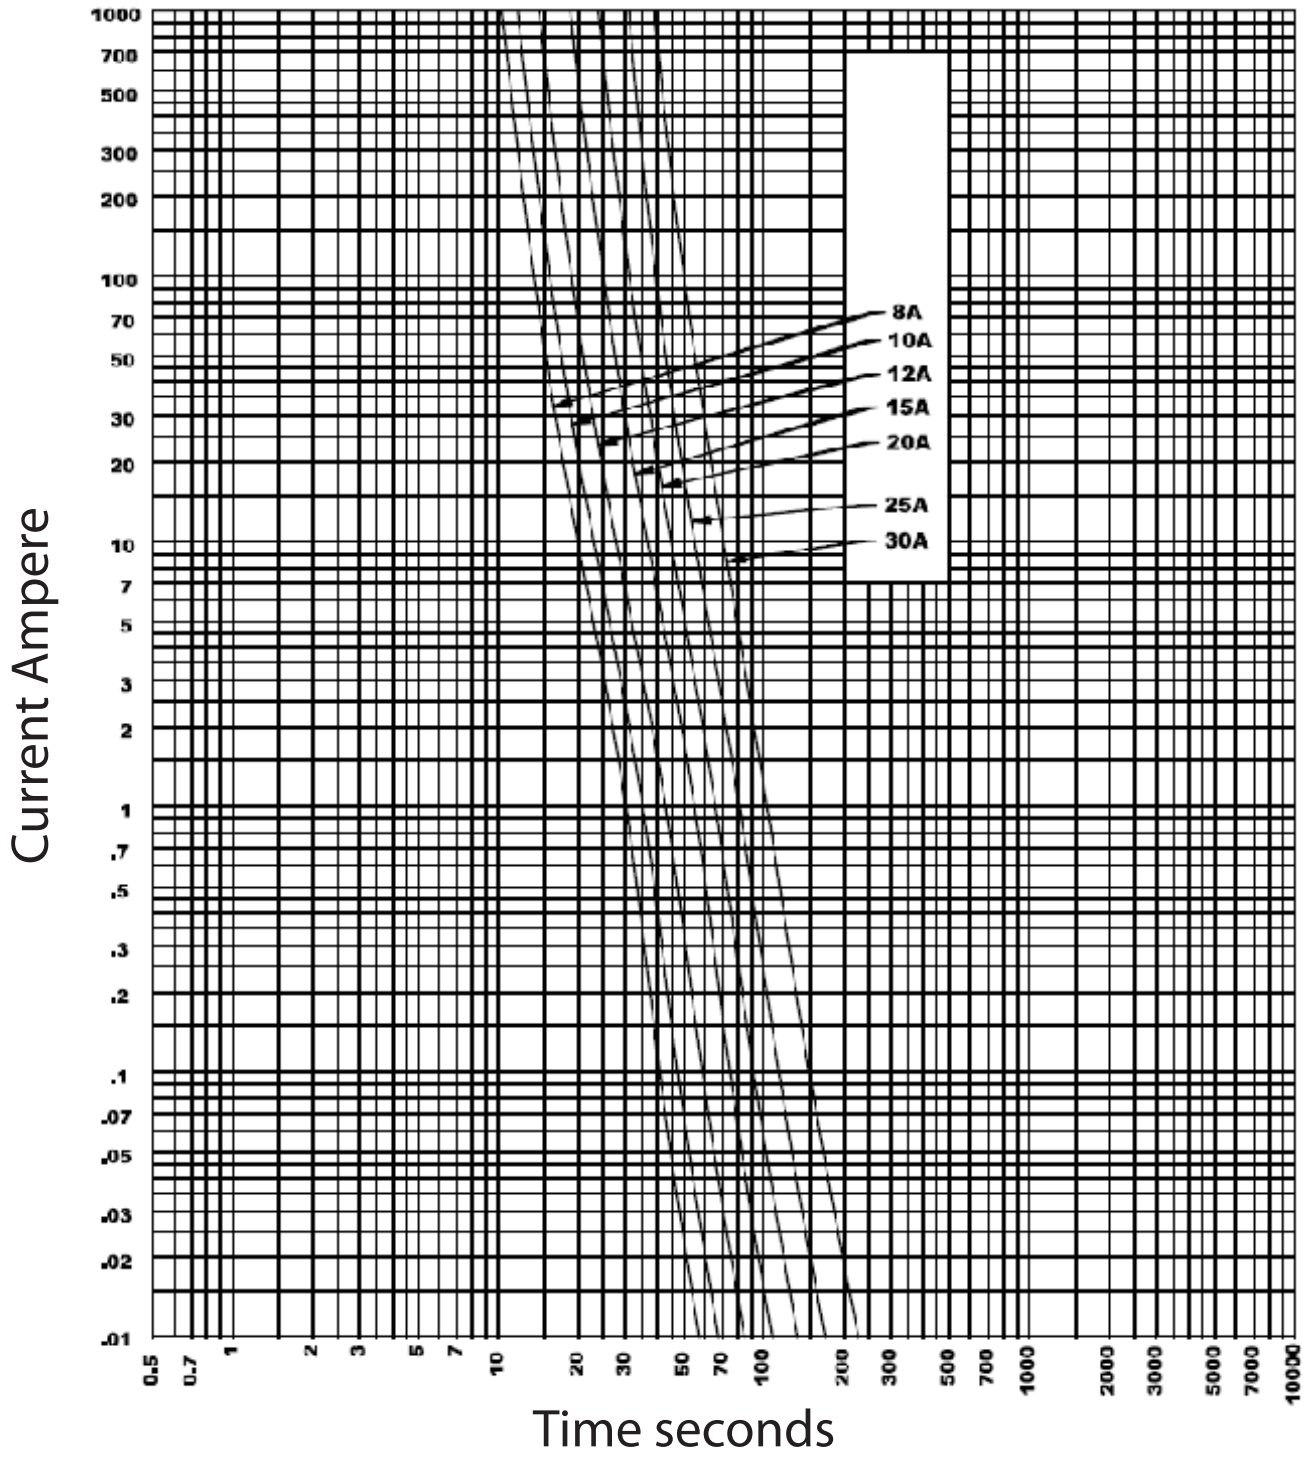

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [ABB manufacturer:](#)*

Other Similar products are found below :

[TY27MX](#) [TV10-516R](#) [RF727](#) [2CMA100178R1000](#) [ACS150-01E-09A8-2](#) [KS70-1104](#) [A75-30-11-230V-50HZ](#) [10-100](#) [5SDD](#) [92Z0401](#)  
[ESV14-BS](#) [EZS-21-250](#) [F204AC-40/0.1](#) [F362-25/0.03](#) [A40-30-10-84](#) [AF26-30-00-14](#) [AF30-30-00-13](#) [AF460-30-11-68](#) [AF50-30-11-70](#)  
[1455](#) [B14-250](#) [EF45-30](#) [ERG297](#) [HSC2-20](#) [1SAM201904R1001](#) [1SAM350000R1003](#) [1SAZ711201R1045](#) [1SAZ721201R1009](#)  
[1SAZ721201R1014](#) [1SAZ721201R1025](#) [1SAZ721201R1045](#) [1SBL367001R1300](#) [1SDA057197R1](#) [1SFA611100R1104](#) [1SFA611101R1002](#)  
[1SFA611130R1103](#) [1SFA611133R1106](#) [1SFA611143R1101](#) [1SFA611202R1108](#) [1SFA611203R1108](#) [1SFA611210R1101](#)  
[1SFA611215R1001](#) [1SFA611216R1108](#) [1SFA611281R1002](#) [1SFA611285R1002](#) [1SFA611702R6006](#) [1SFA616162R1025](#)  
[1SFA896106R1100](#) [1SVR730020R0200](#) [IPC4111](#) [OHB125J12](#)