



ELECTRONICS, INC.  
 44 FARRAND STREET  
 BLOOMFIELD, NJ 07003  
 (973) 748-5089  
<http://www.nteinc.com>

## 2N4125 & 2N4126 Silicon PNP Transistor Audio Amplifier, Switch TO92 Type Package

### Absolute Maximum Ratings:

Collector–Emitter Voltage, $V_{CEO}$		
2N4125 .....	30V	
2N4126 .....	25V	
Collector–Base Voltage, $V_{CBO}$		
2N4125 .....	30V	
2N4126 .....	25V	
Emitter–Base Voltage, $V_{EBO}$ .....	4V	
Continuous Collector Current, $I_C$ .....	200mA	
Total Device Dissipation ( $T_A = +25^\circ\text{C}$ ), $P_D$ .....	625mW	
Derate Above $25^\circ\text{C}$ .....	5mW/ $^\circ\text{C}$	
Total Device Dissipation ( $T_C = +25^\circ\text{C}$ ), $P_D$ .....	1.5W	
Derate Above $25^\circ\text{C}$ .....	12mW/ $^\circ\text{C}$	
Operating Junction Temperature Range, $T_J$ .....	$-55^\circ$ to $+150^\circ\text{C}$	
Storage Temperature Range, $T_{stg}$ .....	$-55^\circ$ to $+150^\circ\text{C}$	
Thermal Resistance, Junction to Case, $R_{thJC}$ .....	83.3 $^\circ\text{C}/\text{W}$	
Thermal Resistance, Junction to Ambient, $R_{thJA}$ .....	200 $^\circ\text{C}/\text{W}$	

### Electrical Characteristics: ( $T_A = +25^\circ\text{C}$ unless otherwise specified)



Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit	
<b>OFF Characteristics</b>							
Collector–Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = 1\text{mA}, I_E = 0$ , Note 1	30	–	–	V	
2N4125							
2N4126			25	–	–	V	
Collector–Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C = 10^\circ\text{A}, I_E = 0$	30	–	–	V	
2N4125							
2N4126			25	–	–	V	
Emitter–Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E = 10^\circ\text{A}, I_C = 0$	4	–	–	V	
Collector Cutoff Current	$I_{CBO}$	$V_{CB} = 20\text{V}, I_E = 0$	–	–	50	nA	
Base Cutoff Current	$I_{BL}$	$V_{BE} = 3\text{V}, I_C = 0$	–	–	50	nA	
<b>ON Characteristics (Note 1)</b>							
DC Current Gain	$h_{FE}$	$V_{CE} = 1\text{V}, I_C = 2\text{mA}$	50	–	150		
2N4125							
2N4126				120	–	360	
2N4125			$V_{CE} = 1\text{V}, I_C = 50\text{mA}$	25	–	–	
2N4126		60					

Note 1. Pulse Test: Pulse Width  $\leq 300^\circ\text{s}$ , Duty Cycle = 2%.

**Electrical Characteristics (Cont'd):** ( $T_A = +25^\circ\text{C}$  unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
<b>ON Characteristics (Cont'd)</b> (Note 1)						
Collector–Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 50\text{mA}, I_B = 5\text{mA}$	–	–	0.4	V
Base–Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C = 50\text{mA}, I_B = 5\text{mA}$	–	–	0.95	V
<b>Small–Signal Characteristics</b>						
Current Gain–Bandwidth Product 2N4125	$f_T$	$I_C = 10\text{mA}, V_{CE} = 20\text{V}, f = 100\text{MHz}$	200	–	–	MHz
2N4126			250	–	–	MHz
Input Capacitance	$C_{ibo}$	$V_{BE} = 0.5\text{V}, I_C = 0, f = 100\text{kHz}$	–	–	10	pF
Collector–Base Capacitance	$C_{cb}$	$I_E = 0, V_{CB} = 5\text{V}, f = 1\text{MHz}$	–	–	4.5	pF
Small–Signal Current Gain 2N4125	$h_{fe}$	$I_C = 2\text{mA}, V_{CE} = 10\text{V}, f = 1\text{kHz}$	50	–	200	
2N4126			120	–	480	
Current Gain – High Frequency 2N4125	$ h_{fe} $	$I_C = 10\text{mA}, V_{CE} = 20\text{V}, f = 100\text{MHz}$	2.0	–	–	–
2N4126			2.5	–	–	–
Noise Figure 2N4125	NF	$I_C = 100^\circ\text{A}, V_{CE} = 5\text{V}, R_S = 1\text{k}\Omega,$ Noise Bandwidth = 10Hz to 15.7kHz	–	–	5.0	db
2N4126			–	–	4.0	db

Note 1. Pulse Test: Pulse Width  $\leq 300^\circ\text{s}$ , Duty Cycle  $\leq 2\%$ .

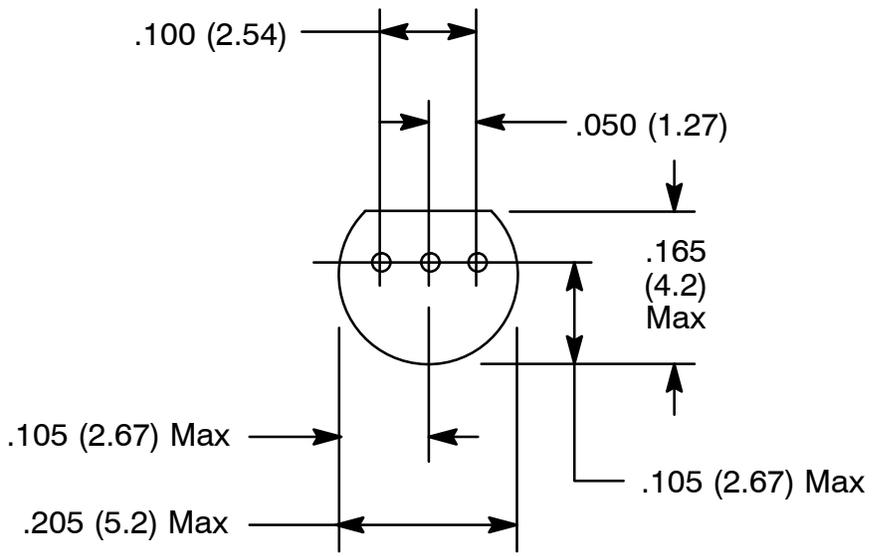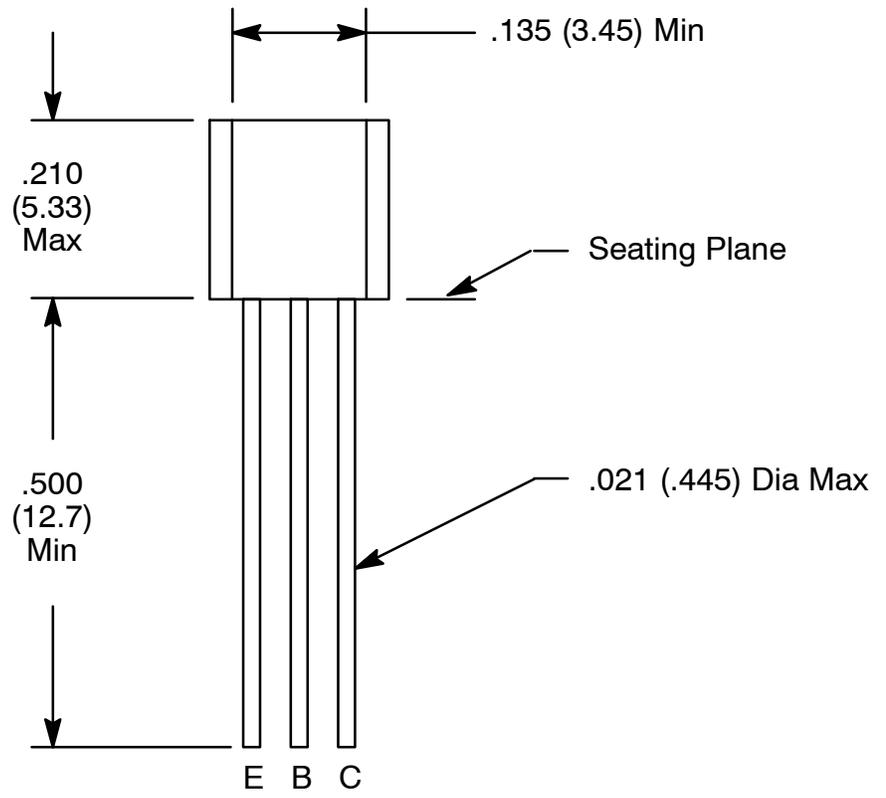

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for NTE manufacturer:*

Other Similar products are found below :

[747](#) [797](#) [868](#) [1724](#) [NEH680M50FE](#) [NEHH1.0M450CB](#) [NTE526A](#) [228A](#) [231](#) [954](#) [2023](#) [510](#) [WH20-04-25](#) [04-SLPE3750A](#) [5615](#) [591](#) [69-](#)  
[36WW-WR-KIT](#) [7056](#) [7448](#) [NEH.10M50AA](#) [NEH2.2M63AA](#) [NEH330M35DD](#) [NEH33M10AA](#) [NEV.22M100AA](#) [NEV470M50FF](#)  
[NTE133](#) [NTE542](#) [NTE74154](#) [R02-11A10-120H](#) [04-SCBW25L-BK](#) [04-SCBW6C-BK](#) [04-SCBW32L-BK](#) [04-SCW10C-BK](#) [04-SCBW19L-](#)  
[GR](#) [04-SCW19L-WH](#) [04-SCW19L-OR](#) [04-SCW38L-WH](#) [04-SCBW50L-OR](#) [04-SCBW50L-GR](#) [04-SCW10C-GR](#) [04-SCW10C-OR](#) [04-](#)  
[SCBW32L-GR](#) [04-SCBW32L-WH](#) [04-SCBW32L-OR](#) [04-SCBW6C-WH](#) [04-SCBW6C-GR](#) [04-SCBW6C-OR](#) [04-SCBW25L-GR](#) [04-](#)  
[SCBW25L-WH](#) [04-ESNF-500L](#)