


# O-ring

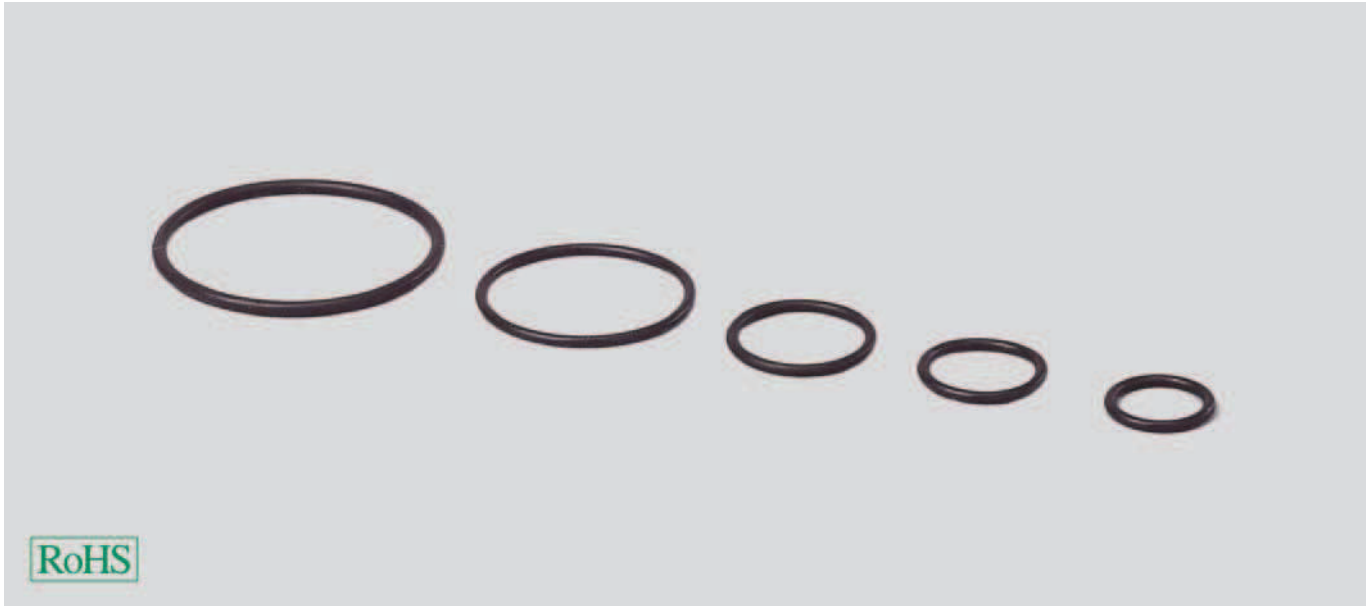

## O-ring

O-rings for sealing against water, dust and oil.

## Application

- Plant and machine construction
- Robot construction
- Automation technology
- Vehicle construction and shipbuilding
- Rail technology
- Installation technology
- Control cabinet construction


## Material

NBR

- halogen-free
- phosphor-free
- silicone-free

## Technical data

Temperature range: -30°C up to +120°C



## Dimensions

D Outer diameter  
d Inner diameter  
s Thickness

### for metric thread

Part no.	Size	Inner Ø mm	Outer Ø mm	Thickness mm	Unit	Net EUR/100 items at a purchase of		
						up to 100	101 - 500	501 - 1000
90263	M12 x 1,5	9,0	12,0	1,5	100	o. r.	o. r.	o. r.
90264	M16 x 1,5	13,0	16,0	1,5	100	o. r.	o. r.	o. r.
90265	M20 x 1,5	17,0	20,0	1,5	100	o. r.	o. r.	o. r.
90266	M25 x 1,5	22,0	26,0	2,0	100	o. r.	o. r.	o. r.
90267	M32 x 1,5	29,0	33,0	2,0	100	o. r.	o. r.	o. r.
90268	M40 x 1,5	35,0	39,0	2,0	100	o. r.	o. r.	o. r.
90269	M50 x 1,5	45,0	49,0	2,0	100	o. r.	o. r.	o. r.
90270	M63 x 1,5	59,0	63,0	2,0	100	o. r.	o. r.	o. r.

### for PG thread

Part no.	Size	Inner Ø mm	Outer Ø mm	Thickness mm	Unit	Net EUR/100 items at a purchase of		
						up to 100	101 - 500	501 - 1000
96366	7	10,0	13,0	1,5	100	o. r.	o. r.	o. r.
96367	9	13,0	16,0	1,5	100	o. r.	o. r.	o. r.
96368	11	16,0	19,0	1,5	100	o. r.	o. r.	o. r.
96369	13,5	18,0	21,0	1,5	100	o. r.	o. r.	o. r.
96370	16	20,0	23,0	1,5	100	o. r.	o. r.	o. r.
96371	21	25,0	29,0	2,0	100	o. r.	o. r.	o. r.
96372	29	33,0	37,0	2,0	100	o. r.	o. r.	o. r.
96373	36	43,0	47,0	2,0	100	o. r.	o. r.	o. r.
96374	42	50,0	54,0	2,0	100	o. r.	o. r.	o. r.
96375	48	55,0	59,0	2,0	100	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Electrical Enclosure Accessories](#) category:*

*Click to view products by [Helukabel](#) manufacturer:*

Other Similar products are found below :

[60121-06-028 C-325 Black](#) [71884-04-028 CM3-100 Black](#) [71884-18-028 LH43-200 Black](#) [71884-24-028 LH75-200 Black](#) [71885-01-028 CM6-150 Black](#) [72459-02-028 DM-3 BLACK](#) [81501-01-000 XPL, 9VB Black](#) [82402-01 PT-8 ALUM](#) [1335GSKT3](#) [14101FP-PK](#) [CB-1263-BT](#) [1611512-4](#) [HB-11498](#) [RC-7775](#) [HM BLACK PANEL](#) [61033-01-000](#) [115123-01-508 CN-RL RS](#) [115124-01-508 CN-XRL XRS](#) [115119-01-000 CN-RL RS](#) [115123-01-000 CN-RL RS](#) [60121-04-028 C-275 Black](#) [60128-01-072](#) [60222-01-028 CM6-225 Black](#) [60272-01-028 CM3-150 Black](#) [60851-01-028 CM69-120 Black](#) [62291-502-000-KEU-10-BLK](#) [62452-01-000 HML-9VB, EB Black](#) [71884-25-028 LH89-130 Black](#) [AXX2POSTBRCKT](#) [FUPMESK](#) [71884-23-028 LH75-130 Black](#) [1317GSKTSC](#) [8G813V40389](#) [DVA.1-10-15-M4-10-70](#) [DVC.1-60-49-60-M10-28-55](#) [DVC.1-15-8,5-15-M4-10-40](#) [DVC.1-20-12-30-M6-18-40](#) [DVC.1-30-18-25-M8-20-40](#) [DVC.1-35-31-15-M8-20-40](#) [DVC.1-35-31-15-M8-20-70](#) [DVC.1-75-60-40-M12-37-70](#) [DVC.2-30-22-20-M8-20-55](#) [DVC.2-40-30-25-M8-23-55](#) [DVC.2-75-60-40-M12-37-55](#) [DVC.2-21-16-22-M6-18-40](#) [DVC.2-40-20-48-M8-23-40](#) [DVC.2-40-32-50-M8-23-40](#) [DVC.2-20-14-19-M6-18-70](#) [DVC.2-25-18-20-M6-18-70](#) [DVC.3-20-14-20-M6-40](#) [DVC.3-20-14-30-M6-40](#)