



RoHS  
2002/95/EC

ELECTRONICS, INC.  
44 FARRAND STREET  
BLOOMFIELD, NJ 07003  
(973) 748-5089  
<http://www.nteinc.com>

## NTE5332SM & NTE5334SM Silicon Bridge Rectifier, 1A

### Features:

- Glass Passivated Die Construction
- Low Forward Voltage Drop
- High Current Capability
- High Surge Current Capability
- Designed for Surface Mount Application
- Plastic Material – UL Recognition Flammability Classification 94V-O

**Maximum Ratings and Electrical Characteristics:** ( $T_A = +25^\circ\text{C}$  unless otherwise specified, Single Phase, half wave, 60Hz, resistive or inductive load. For Capacitive Load, Derate Current by 20%)  
Peak Repetitive Reverse Voltage,  $V_{RRM}$

NTE5332SM .....	600V
NTE5334SM .....	1000V

Working Peak Reverse Voltage,  $V_{RWM}$

NTE5332SM .....	600V
NTE5334SM .....	1000V

DC Blocking Voltage,  $V_R$

NTE5332SM .....	600V
NTE5334SM .....	1000V

RMS Reverse Voltage,  $V_{R(RMS)}$

NTE5332SM .....	420V
NTE5334SM .....	700V

Average Rectified Output Current ( $T_A = +40^\circ\text{C}$ ),  $I_O$  .....

Non-Repetitive Peak Forward Surge Current, $I_{FSM}$ (8.3ms Single Half Sine-Wave Superimposed on Rated Load)	50A
--	-----

Forward Voltage per Element ( $I_F = 1\text{A}$ ) .....

1.1V
------

Peak Reverse Current at Rated DC Blocking Voltage(Note 1),  $I_{RM}$

$T_A = +25^\circ\text{C}$ .....	5 $\mu\text{A}$
$T_A = +125^\circ\text{C}$ .....	500 $\mu\text{A}$

Typical Junction Capacitance per Element (Note 1),  $C_j$  .....

25pF
------

Operating Junction Temperature Range,  $T_j$  .....

-65° to +150°C
----------------

Storage Temperature Range,  $T_{STG}$  .....


-65° to +150°C
----------------

Typical Thermal Resistance (Per Leg, Note 2),

Junction-to-Ambient, $R_{thJA}$ .....	40°C/W
Junction-to-Case, $R_{thJL}$ .....	15°C/W

Note 1. Measured at 1.0MHz and applied reverse voltage of 4.0 Volts.

Note 2 Mounted on PC bard with 13mm<sup>2</sup> copper pad.

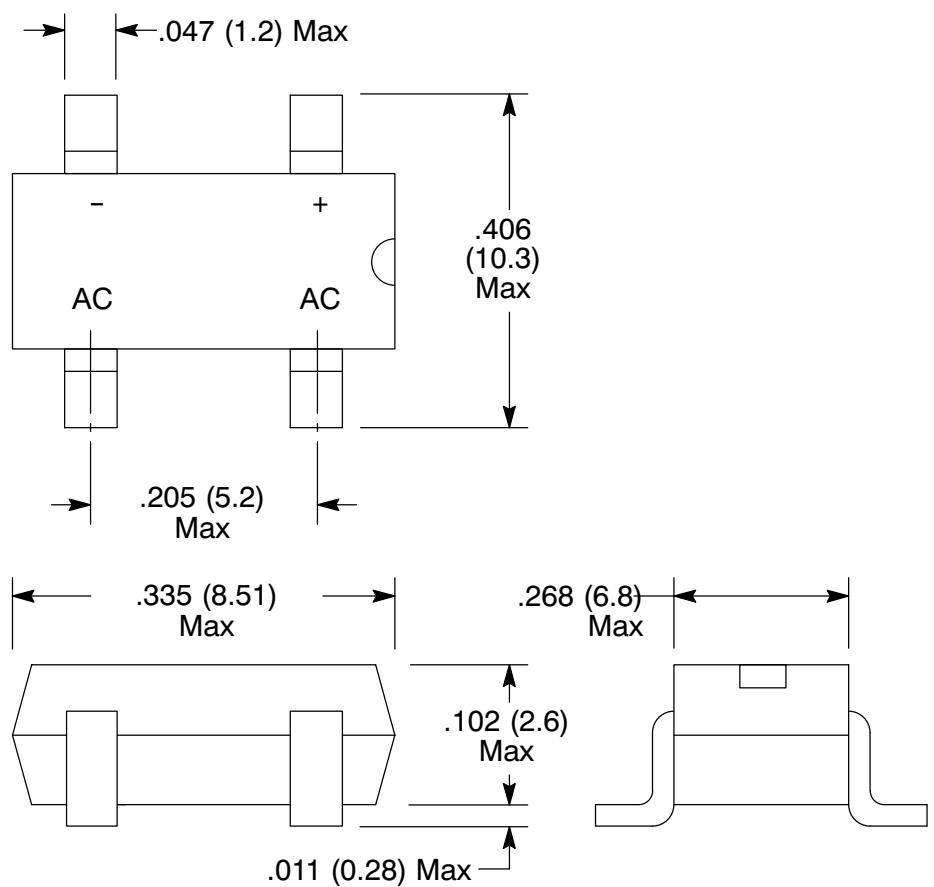

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bridge Rectifiers](#) category:*

*Click to view products by [NTE manufacturer](#):*

Other Similar products are found below :

[G3SBA60-E351](#) [GBJ1504-BP](#) [GBU10B-BP](#) [GBU15J-BP](#) [GBU15K-BP](#) [GBU4A-BP](#) [GBU4D-BP](#) [GBU6B-E3/45](#) [GSIB680-E3/45](#) [DB101-BP](#) [DF10SA-E345](#) [RMB2S RCG](#) [APT30DF100HJ](#) [APT60DF20HJ](#) [B2S-E3/80](#) [BU1506-E351](#) [BU15085S-E345](#) [BU1508-E3/45](#) [BU1510-E3/45](#) [RS404GL-BP](#) [RS405GL-BP](#) [G3SBA20-E3/51](#) [G5SBA20-E3/51](#) [G5SBA60-E3/51](#) [GBJ1502-BP](#) [GBL02-E351](#) [GBL10-E3/45](#) [GBU10J-BP](#) [GBU4J-BP](#) [GBU4K-BP](#) [GBU8B-E3/45](#) [GBU8D-BP](#) [GBU8J-BP](#) [GSIB1520-E3/45](#) [MB1510](#) [MB352W](#) [MB6M-G](#) [B2M-E345](#) [B40C7000A](#) [B500C7000A](#) [MP5010W-BP](#) [MP501W-BP](#) [MP502-BP](#) [BR1005-BP](#) [BR101-BP](#) [BU1006-E345](#) [BU12065S-E3/45](#) [BU1508-E3/51](#) [BU2006-E3/45](#) [BU2008-E345](#)