



ELECTRONICS, INC.

44 FARRAND STREET
BLOOMFIELD, NJ 07003
(973) 748-5089

<http://www.nteinc.com>

NTE5390 thru NTE5394 Silicon Bridge Rectifier, 35A

Features:

- Low Leakage
- Low Forward Voltage
- High Forward Surge Current Capability
- Surge Overload Rating: 300A Peak
- Mounting Position: Any

Maximum Ratings and Electrical Characteristics: ($T_A = +25^\circ\text{C}$ unless otherwise specified.
Single Phase, Half Wave, 60Hz, Resistive or Inductive Load, Note 1.)

Maximum Recurrent Peak Reverse Voltage, V_{RRM}

NTE5390	200V
NTE5391	400V
NTE5392	600V
NTE5393	800V
NTE5394	1000V

Maximum RMS Bridge Input Voltage, V_{RMS}

NTE5390	140V
NTE5391	280V
NTE5392	420V
NTE5393	560V
NTE5394	700V

Maximum DC Blocking Voltage, V_{DC}

NTE5390	200V
NTE5391	400V
NTE5392	600V
NTE5393	800V
NTE5394	1000V

Maximum Average Forward Rectified Output Current ($T_A = +100^\circ\text{C}$), $I_{O(AV)}$ 35A

Peak Forward Surge Current (8.3ms single half wave superimposed on rated load), I_{FSM} 300A

Maximum Forward Voltage Drop (Per element at 17.5A), V_F 1.1V


Maximum Reverse Current at Rated DC Blocking Voltage Per Element, I_R

$T_A = +25^\circ\text{C}$	5 μA
$T_A = +100^\circ\text{C}$	0.2mA

Operating Temperature Range, T_J -55° to +150°C

Storage Temperature Range, T_{stg} -55° to +150°C

Note 1. For capacitive load, derate current by 20%.

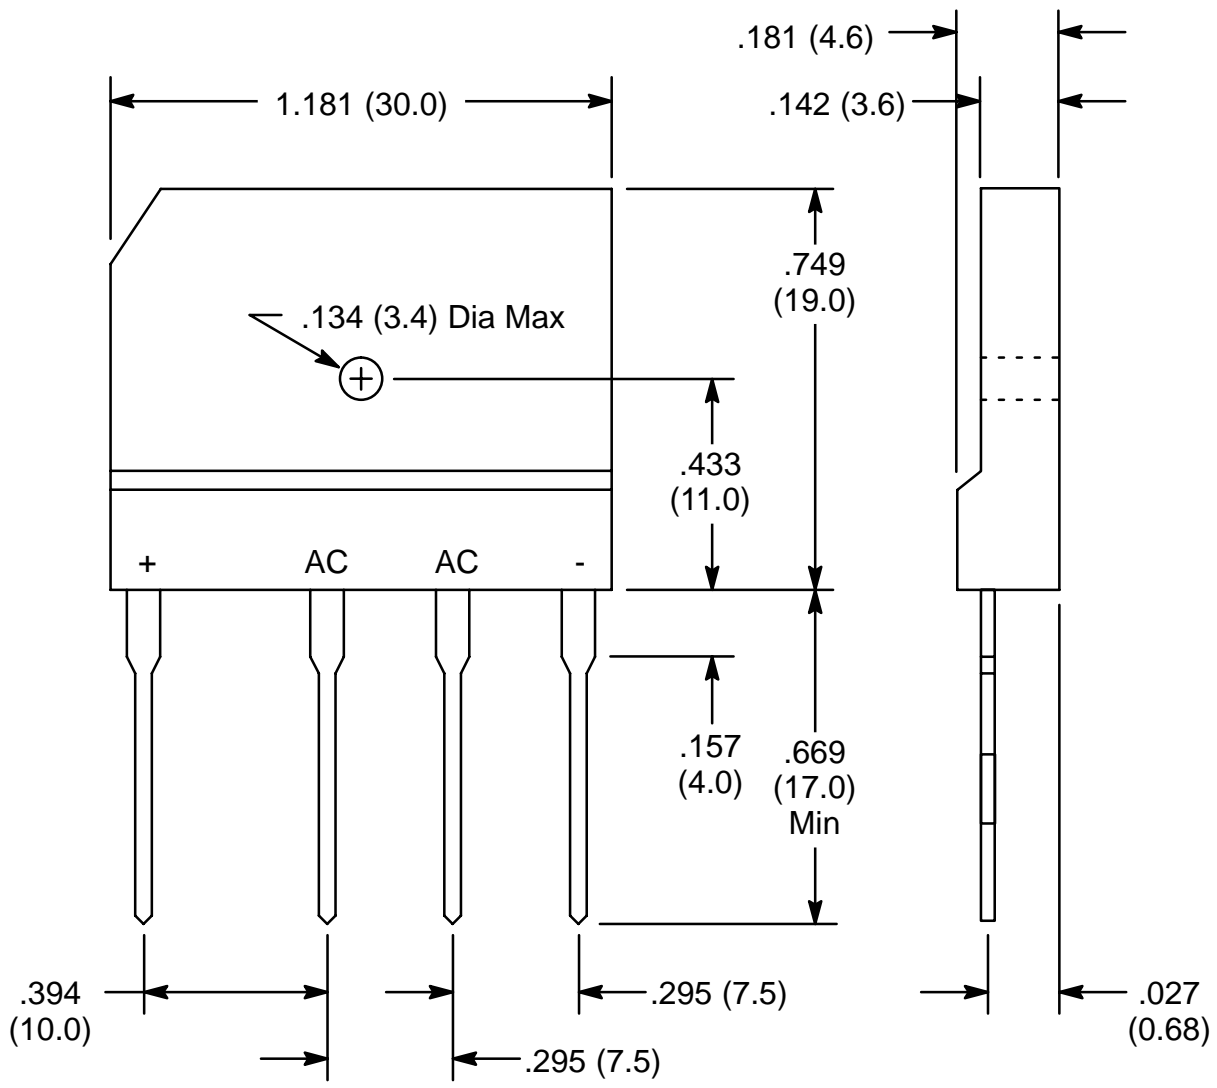

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bridge Rectifiers](#) category:

Click to view products by [NTE manufacturer](#):

Other Similar products are found below :

[G3SBA60-E351](#) [GBJ1504-BP](#) [GBU10B-BP](#) [GBU15J-BP](#) [GBU15K-BP](#) [GBU4A-BP](#) [GBU4D-BP](#) [GBU6B-E3/45](#) [GSIB680-E3/45](#) [DB101-BP](#) [DF10SA-E345](#) [RMB2S](#) [RCG](#) [APT30DF100HJ](#) [APT60DF20HJ](#) [B2S-E3/80](#) [BU1506-E351](#) [BU15085S-E345](#) [BU1508-E3/45](#) [BU1510-E3/45](#) [RS404GL-BP](#) [RS405GL-BP](#) [G3SBA20-E3/51](#) [G5SBA20-E3/51](#) [G5SBA60-E3/51](#) [GBJ1502-BP](#) [GBL02-E351](#) [GBL10-E3/45](#) [GBU10J-BP](#) [GBU4J-BP](#) [GBU4K-BP](#) [GBU8B-E3/45](#) [GBU8D-BP](#) [GBU8J-BP](#) [GSIB1520-E3/45](#) [MB1510](#) [MB352W](#) [MB6M-G](#) [B2M-E345](#) [B40C7000A](#) [B500C7000A](#) [MP5010W-BP](#) [MP501W-BP](#) [MP502-BP](#) [BR1005-BP](#) [BR101-BP](#) [BU1006-E345](#) [BU12065S-E3/45](#) [BU1508-E3/51](#) [BU2006-E3/45](#) [BU2008-E345](#)